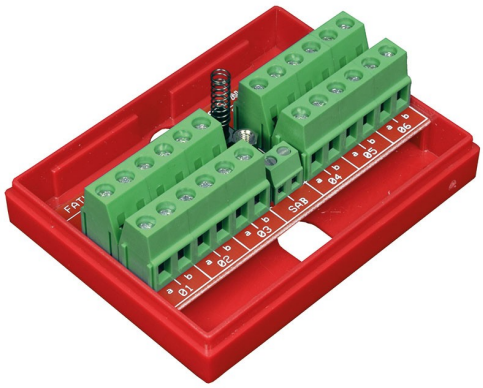


28912R

E-NR: 6301811

REDLINE JUNCTION BOX “MINI” 12 PAIRS

Complete junction box with 2,5 mm2 connection for installation of fire systems.

Anti-tampering protected junction box with 12 pairs.

Suitable for fire installations.

The terminal block has 12 parallel connected terminals with up to 2.5 mm2 screw connection with lift function for, for example, coarser fire cables as well 2 separate connections that are intended for anti-tamper switch connection.

The box is flame-retardant according to UL 94 V-0.

(The fire sign is not included)

TECHNICAL DETAILS

Dimensions (L x W x H) mm	58 x 76 x 27
Cable dimension - screw terminals	2,2 – 2,5mm2
Input max. load	60 V / 2 A
Tamper switch max. load	50 mA
Product type	Connection accessories
Environment	Indoor
Connection terminal	Pairing, Tamper protection
Terminal type	Screw/screw
Series	Mini series
Enclosure	Plastic

Enclosure size	Mini
Product line	Fatum
Product feature	Surface-mounted

ORDER INFORMATION

Model	E-NR	Description
28912.03R	6301811	

SCHEMATICS

