

# DC110

## BIASED FLOOR MOUNT CONTACT

### Overhead Door Magnetic Contact


---

The DC110 overhead door magnetic contact is for use in the rigorous environments for commercial and industrial installations. The floor mount units are constructed with a low profile heavy cast aluminium housing. The reed switch assembly is fully encased in an exclusive polyurethane potting material to prevent damage due to moisture or humidity.

### Easy Installation

---

A wide operating gap distance makes installation easy and helps prevent false alarms caused by door movement or damaged and loose fitting doors.

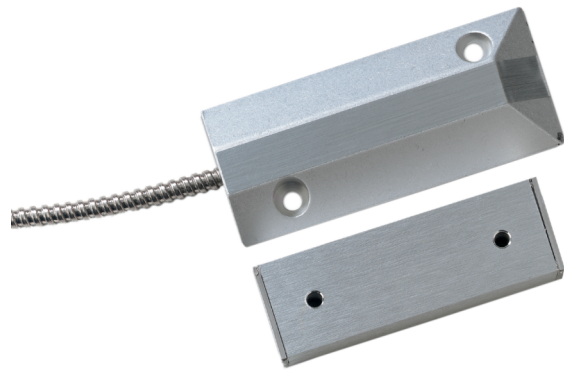

### Details

---

- Miniature, low-profile design
- Stainless steel armoured cable for added security, reliability
- Small size less likely to be damaged by forklifts
- Tamper loop provided

# DC110

## BIASED FLOOR MOUNT CONTACT

### Technical specifications

---

#### General


Application type	Surface Mount
Contact type	CO
Connectivity	5 wires, 2 m

#### Wired/wireless

Wired-wireless	Wired
----------------	-------

#### Physical

Material	Aluminium
Dimensions magnet	76 x 25 x 12 mm
Dimensions contact / sensor	88 x 38 x 11 mm
Operating gap	19 mm (min.); 63 mm (max.)

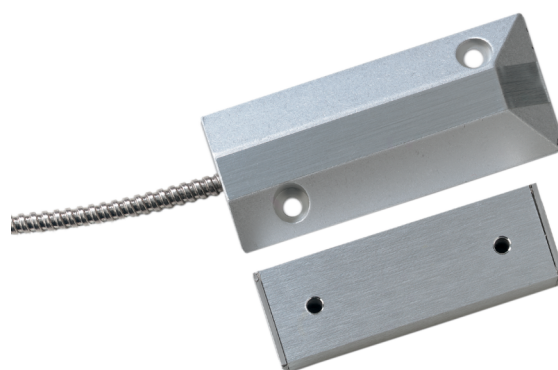

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 22 April 2021 - 17:38

