

2 Wire HD Video Intercom Release Note (2025-12-23)

Device Model	Firmware Version
DS-KD7003EY-IME2, DS-KD7000EY-ME2	VIS_OUTDOOR_F2pro_EN_STD_V1.3.0_build251210
DS-KV7023EY-IME2, DS-KV7413EY-IME2	VIS_VILLA_F2pro_EN_STD_V1.3.0_build251210
DS-KAD-E2/E1	VIS_CONVERTER_B3pro_EN_STD_V1.0.2_build251209
DS-KD-M/AC	ACS_DS-KD-XX_M2pro_GML_GM_V2.0.0_build20251121
DS-KD-TDM/TDE	VIS_KDDIS_R0_EN_STD_V1.0.3_build250519
DS-KM9503	VIS_MAINSTATION_R2_EN_STD_V1.2.34_build250922
DS-KH7000EY-E2	VIS_INDOOR_M5Plus_EN_STD_V1.0.4_build250711
DS-KH7100EY-E2, DS-KH7100EY-WE2	VIS_INDOOR_B1pro_EN_STD_V2.2.68_build250919
DS-KH7300EY-WTPE2, DS-KIS707EY/708EY	VIS_INDOOR_B1pro_EN_STD_V2.2.74_build251104
DS-KH7300EY-THE2, KH7300EY-THIE2 DS-KH7300EY-TIE2, KH7300EY-TE2 DS-KH7300EY-WTE2, KH7300EY-WTHE2 DS-KH7300EY-WTHIE2, KH7300EY-WTIE2 Naming Rule: W for Wi-Fi, H for Handset, I for Induction loop, T for TF card	VIS_INDOOR_B1pro_EN_STD_V2.2.66_build250919

Note: Please update indoor station first, then door station sub module, finally main module


New indoor station DS-KH7300EY-WTPE2 and DS-KIS707EY/708EY kit released

Note:

1. The indoor station's power supply should be 24V 2.5A. The door station's power adapter is 12V 1.5A. https://pinfo.hikvision.com/hkwsen/unzip/20251204212803_30958_doc/ Please use the power adaptor provided in the package to power the device.
2. The nametag and call button are replaceable, you can replace them according to actual need. Here takes door station with 4 call buttons as an example.
3. The system supports maximum 2 door stations and 4 indoor stations. The built-in power supply supports 4 indoor stations and 1 door station only. Additional door station requires separate power

supply.

4. When there is only 1 door station, leave the sub door station which is marked red and connect the rest.

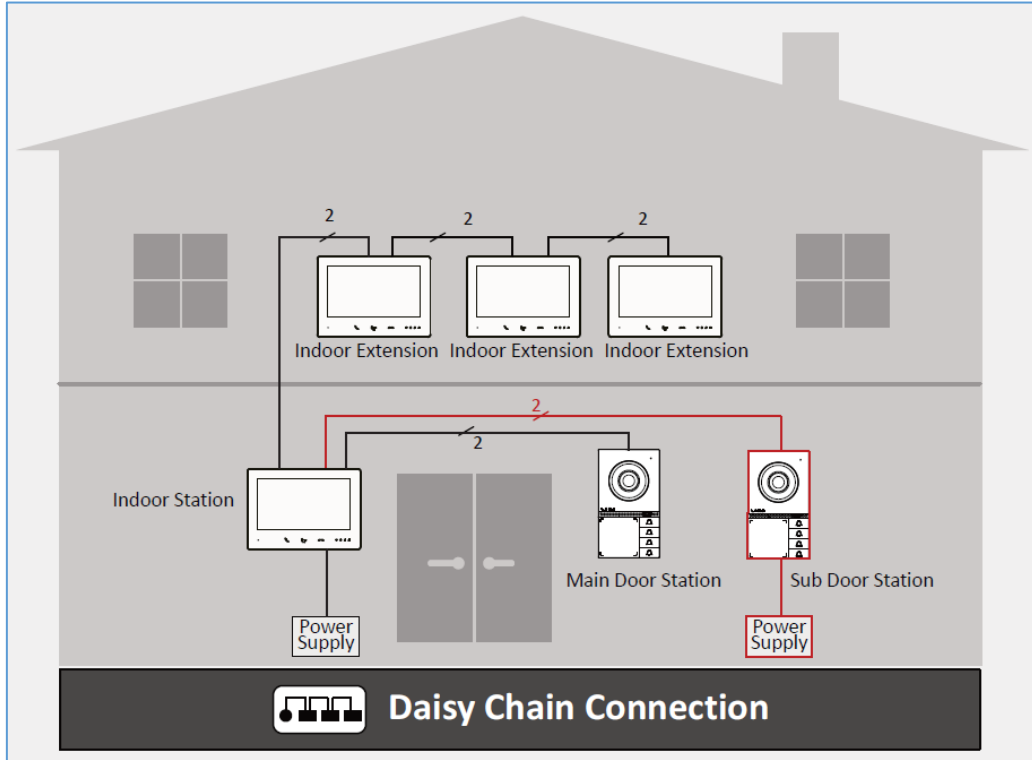

For more information, please refer to the user manual and quick start guide.

https://pinfo.hikvision.com/hkwsen/unzip/20251204170938_25398_doc/UD44580B_DS-KIS707%20708EY%20Kit_QSG_20251204.pdf

https://pinfo.hikvision.com/hkwsen/unzip/20251204212803_30958_doc/

New distributor DS-KAD7042EY release for the first time



1. 5 interface indicators show device status, 48 VDC power input.
2. DIN rail installation, smaller size 71.84 mm × 90 mm × 65.95 mm (2.8" × 3.5" × 2.6"), about 4U
3. IN/ OUT: Support DS-KAD7042EY cascade, or connection to DS-KAD7060EY-S for network communication between multiple buildings
4. 3 Channel 2-wire interface for door stations, indoor stations and KAD7061 or KAD7062 simultaneous transmission of power and network signals on 2 wires, CH1+CH2+CH3 < 110 W
5. Change the wiring interface to slotted screw, wire with the screw drive inside indoor/door station package.

For more information, please refer to the user manual.

https://pinfo.hikvision.com/hkwsen/unzip/20251204170822_02991_doc/102047738_UD44982B_DS-KAD7042EY%20Series%20Distributor_UM_20251204.pdf

Modified features:

Door station:

1. Fixed a rare issue where the elevator could not be called after a device restart
2. Optimized the web page UI and fixed some display issue
3. Optimized the M1 card encryption function
4. Modified the Portuguese door opening prompt voice

2 Wire HD Video Intercom Release Note (2025-10-21)

Device Model	Firmware Version
DS-KD7003EY-IME2, DS-KD7000EY-ME2	VIS_OUTDOOR_F2pro_EN_STD_V1.3.0_build250920
DS-KV7023EY-IME2, DS-KV7413EY-IME2	VIS_VILLA_F2pro_EN_STD_V1.3.0_build250920


DS-KAD-E2/E1	VIS_CONVERTER_B3pro_EN_STD_V1.0.0_build250919
DS-KD-TDM/TDE	VIS_KDDIS_R0_EN_STD_V1.0.3_build250519
DS-KM9503	VIS_MAINSTATION_R2_EN_STD_V1.2.34_build250922
DS-KH7100EY-E2, DS-KH7100EY-WE2	VIS_INDOOR_B1pro_EN_STD_V2.2.68_build250919
DS-KH7300EY-THE2, DS-KH7300EY-THIE2 DS-KH7300EY-TIE2, DS-KH7300EY-TE2 DS-KH7300EY-WTE2, DS-KH7300EY-WTHE2 DS-KH7300EY-WTHIE2, DS-KH7300EY-WTIE2 Naming Rule: W for Wi-Fi, H for Handset, I for Induction loop, T for TF card	VIS_INDOOR_B1pro_EN_STD_V2.2.66_build250919

Note: Please update indoor station first, then door station sub modules, finally door station main module

The 2 wire HD to IP converter DS-KAD-E2/E1 is released. we can call elevator, live view IP camera, call main station DS-KM9503 on 2 wire HD door station and indoor station




- support connecting to IP intercom main station
- support adding IPC to Indoor monitor.
- support 2 wire HD system work with lift controller.
- 1 Two-Wire Interface to connect ground distributor, 1 RJ45 port to connect to IP device , 3 indicators
- Support AP mode, power by 12V/DC or POE
- Topology

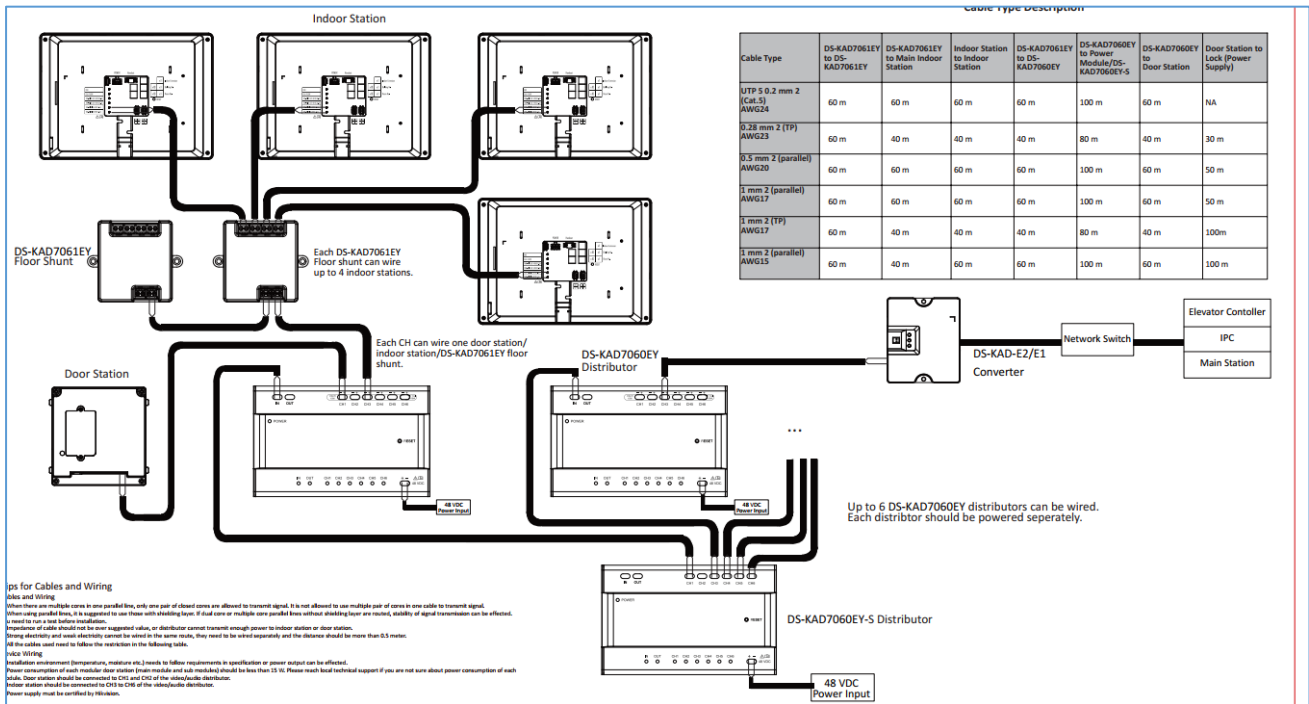

New Features

Door station:


1. After linking the converter, the door station will register to main station DS-KM9503, then we can call main station from KD7003, live view, intercom and unlock KD7003 from main station
2. After linking the converter, if unlocking from door station or indoor station, we can call elevator controller and release the relay
3. Support importing and exporting custom No. for calling indoor station

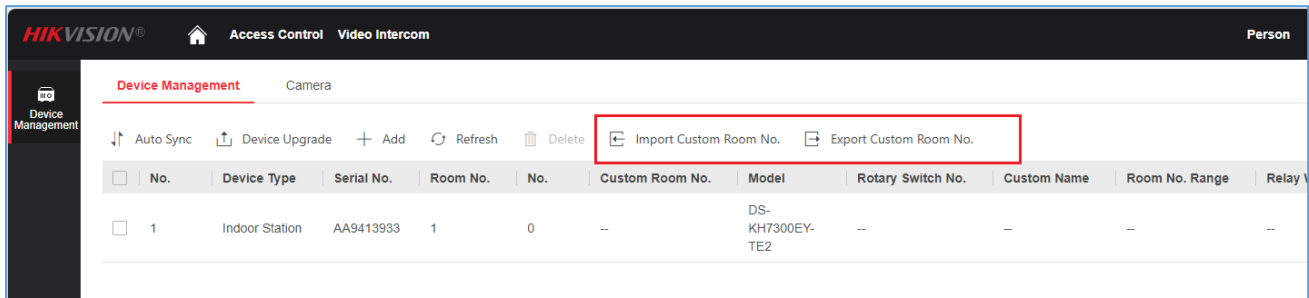

	A	B	C
1	Import instructions: Cust Room Num: 1~9999 Custom room number for indoor units, ranging from 1 to 9999. Required, cannot be duplicated or duplicated with Room Num Room Num: 1~999 indoor unit equipment dialing address, range 1~999. Must be filled in, cannot be duplicated, cannot be duplicated with Cust Room Num		
2	Room Num List		
3	Room Num	Cust Room Num	
4	1	1001	
5			
6			
7			

Indoor station:

1. Live view ip camera on the screen
2. Call elevator and KM9503 main station with shortcut key (please enable from menu if need to use this function)

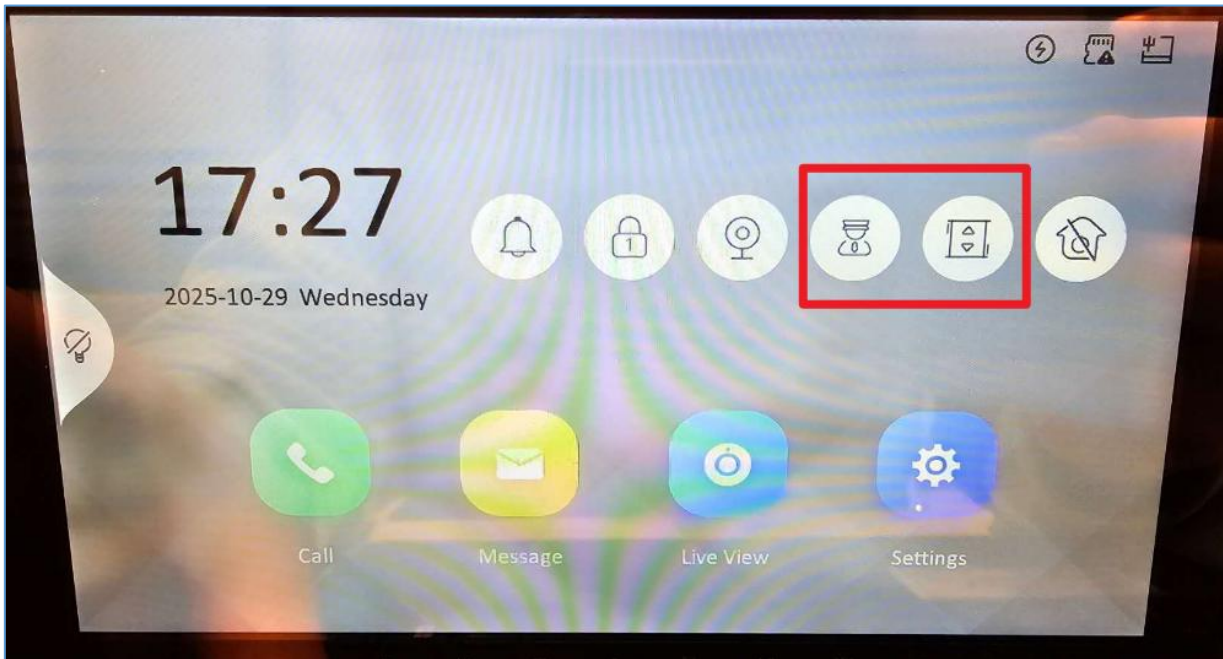

3. Support floor settings for the main indoor station for call elevator scenario

Note: After adding indoor station to Hik-Connect, only support live view and unlock from the app, other relay related and call elevator functions are not supported on the app.

Converter

1. Support adding converter to main station device list
2. Support adding IP camera to device list on the web

3. Support linking to elevator controller
4. Support adding door station, sub door station and outer door station on the web and sync to main station KM9503

Main station:

1. Adding converter in the device list of web page
2. Sync door station, sub door station and outer door station from converter to main station device list and display the status
3. Calling from door station, outer door station to main station and unlocking, capture image or record audio/video after answer.
4. Calling from main station to 2 wire HD indoor station and record audio
5. Optimized the DST related function

2 Wire HD Video Intercom Release Note (2025-07-09)

Device Model	Firmware Version
DS-KD7003EY-IME2, DS-KD7000EY-ME2	VIS_OUTDOOR_F2pro_EN_STD_V1.2.0_build250708
DS-KV7023EY-IME2, DS-KV7413EY-IME2	VIS_VILLA_F2pro_EN_STD_V1.2.0_build250708
DS-KD-TDM	VIS_KDDIS_R0_EN_STD_V1.0.3_build250519
DS-KH7100EY-E2, DS-KH7100EY-WE2	VIS_INDOOR_B1pro_EN_STD_V2.2.64_build250519
DS-KH7300EY-THE2, DS-KH7300EY-THIE2 DS-KH7300EY-TIE2, DS-KH7300EY-TE2 DS-KH7300EY-WTE2, DS-KH7300EY-WTHE2 DS-KH7300EY-WTHIE2, DS-KH7300EY-WTIE2 Naming Rule: W for Wi-Fi, H for Handset, I for Induction loop, T for TF card	VIS_INDOOR_B1pro_EN_STD_V2.2.60_build250514

Note: Please update indoor station first, then door station sub modules, finally door station main module

Modified feature:

1. Optimized door station testing process in factory production.

2 Wire HD Video Intercom Release Note (2025-05-26)

Device Model	Firmware Version
DS-KD7003EY-IME2, DS-KD7000EY-ME2	VIS_OUTDOOR_F2pro_EN_STD_V1.2.0_build250519
DS-KV7023EY-IME2, DS-KV7413EY-IME2	VIS_VILLA_F2pro_EN_STD_V1.2.0_build250519
DS-KD-TDM	VIS_KDDIS_R0_EN_STD_V1.0.3_build250519
DS-KH7100EY-E2, DS-KH7100EY-WE2	VIS_INDOOR_B1pro_EN_STD_V2.2.64_build250519
DS-KH7300EY-THE2, DS-KH7300EY-THIE2 DS-KH7300EY-TIE2, DS-KH7300EY-TE2 DS-KH7300EY-WTE2, DS-KH7300EY-WTHE2 DS-KH7300EY-WTHIE2, DS-KH7300EY-WTIE2 Naming Rule: W for Wi-Fi, H for Handset, I for Induction loop, T for TF card	VIS_INDOOR_B1pro_EN_STD_V2.2.60_build250514




Note: Please update indoor station first, then door station sub modules, finally door station main module

New Features**Door Station**


1. KD7003 support trade button (automatically unlock door after receive call) function.
For example, if you set same schedule as below pictures, the door will unlock automatically after receive the call from button1 between Monday to Friday 8:00-18:00

Note:

- 1) Each button (of main module and nametag DS-KD-KK or DS-KD-K12 module) can only be linked to one template only.
- 2) Only lock1 will be open automatically, lock2 doesn't support trade button function.

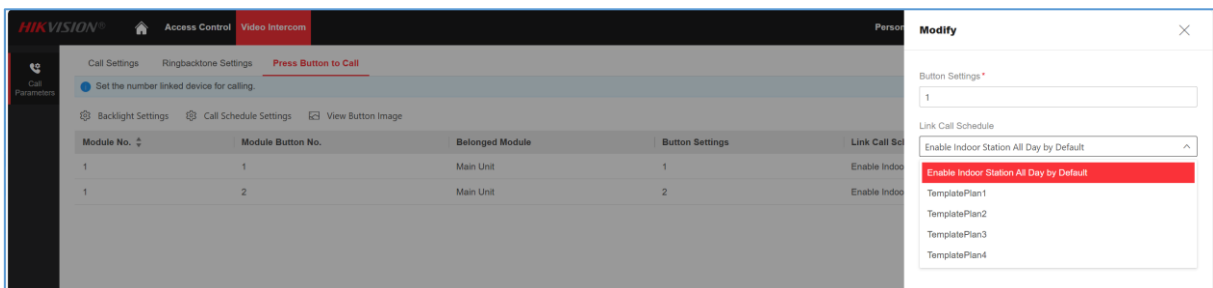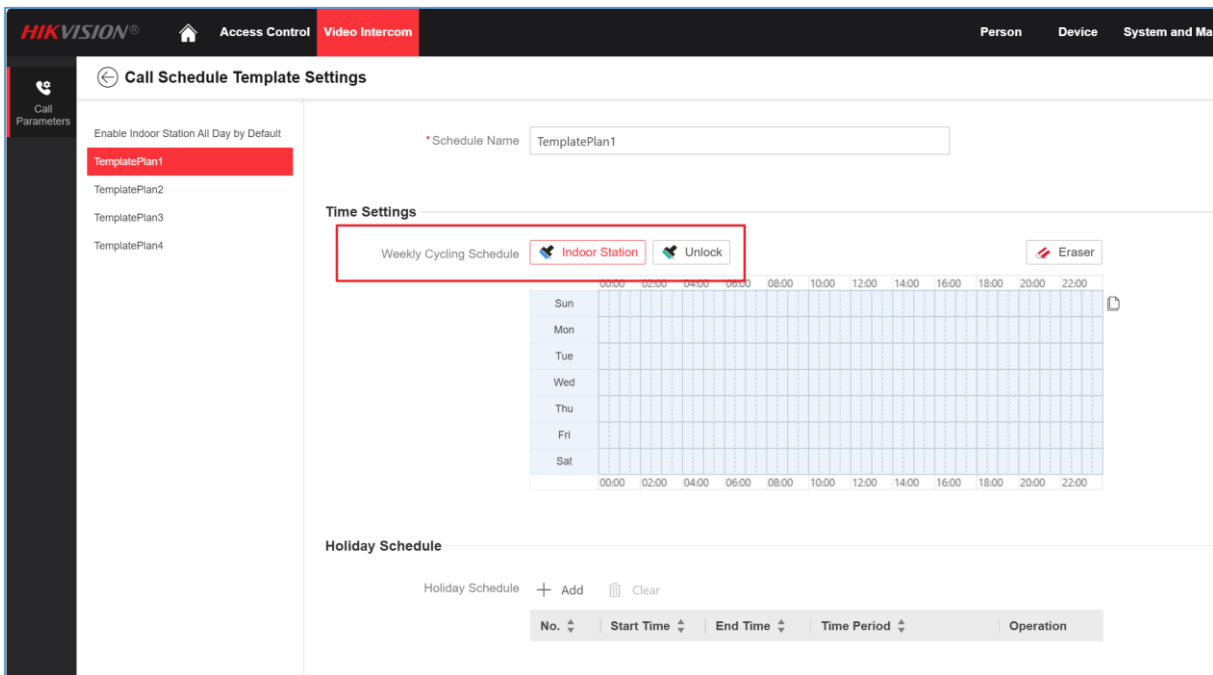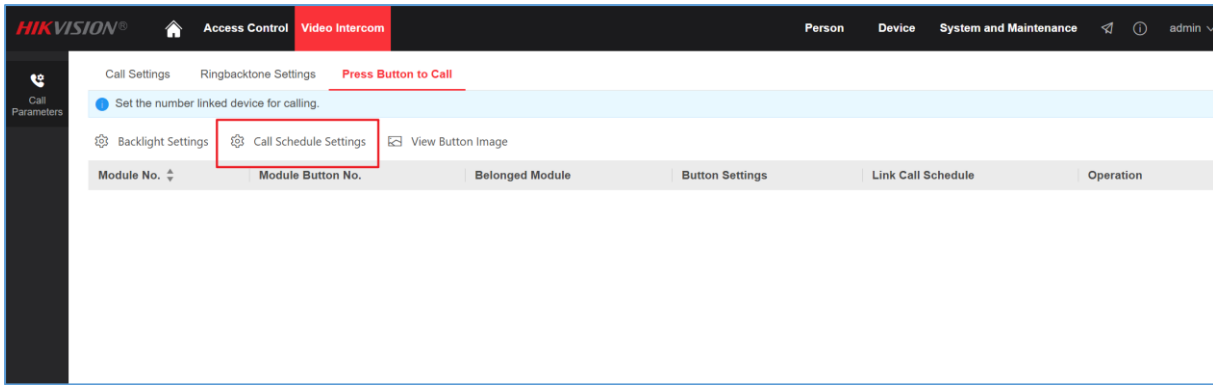

2. Support more audio formats and improve the audio quality.
3. Add voice prompt "door is open", now we have 4 options, disable unlocking sound, short beep sound, long beep sound and voice prompt "The door is open".

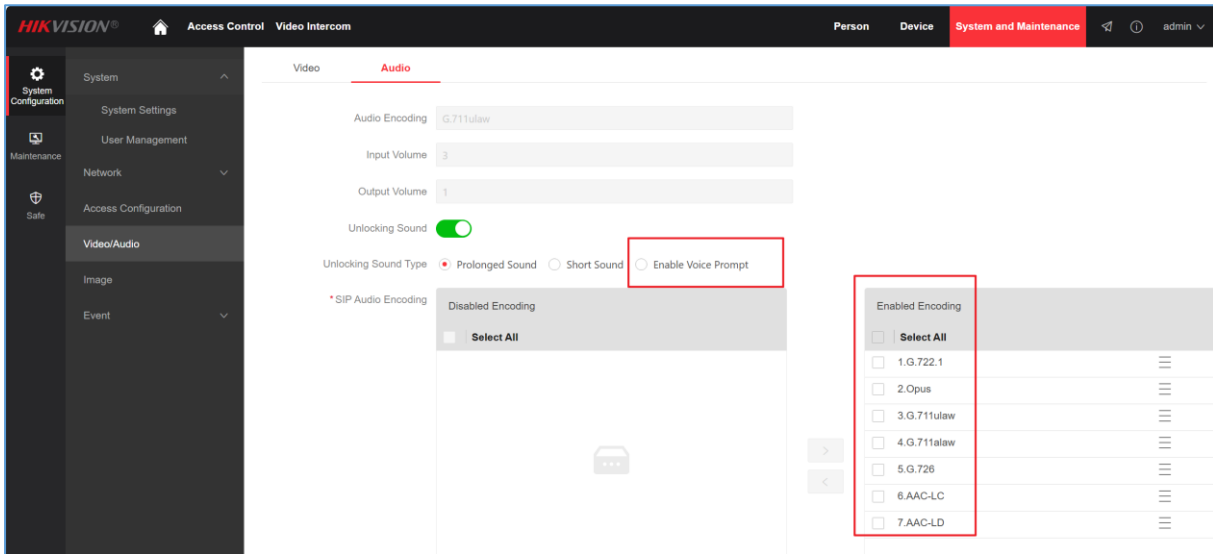

4. Compatible with DS-KD-DIS module.

Modified feature:

2. Change the rotary switch for lock control logic.

Note: 1. When it's set to 0-8, the unlock duration is fixed, when set to 9, you can set the open duration on the webpage.

2. When it's set to 0/1/2, only lock 1(DC pulse) is valid and you can see one lock icon on indoor station; when it's 3/4/5, only lock2(relay) is valid and you can see one lock icon on indoor station; when it's 6/7/8, lock1&lock2 are valid and two lock icons on indoor station.

Rotary switch	Open duration(s)	Lock Type
0	2	DC Pulse (Lock1)
1	5	DC Pulse (Lock1)
2	10	DC Pulse (Lock1)
3	2	Relay (Lock2)
4	5	Relay (Lock2)
5	10	Relay (Lock2)
6	2	Lock1+Lock2
7	5	Lock1+Lock2
8	10	Lock1+Lock2
9	DC Pulse(Lock1)+ Mechanical Doorbell(Lock2), duration set on the webpage	




Door Parameters Card Settings Privacy Settings

Door No. 1 2


*Door Name

Open Duration


3. Change the default advertisement picture duration to 10s on touch display module

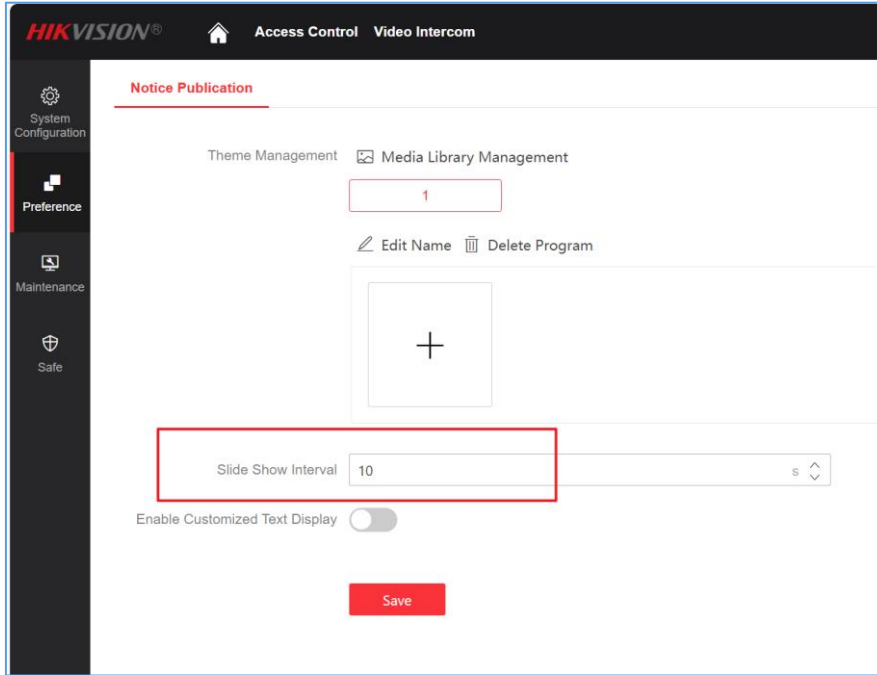


4. Change the motion detection logic, after trigger the motion, the touch display module will still play the advertisement picture for 5s before enter the default home page
5. Optimize the video quality, and enable WDR by default

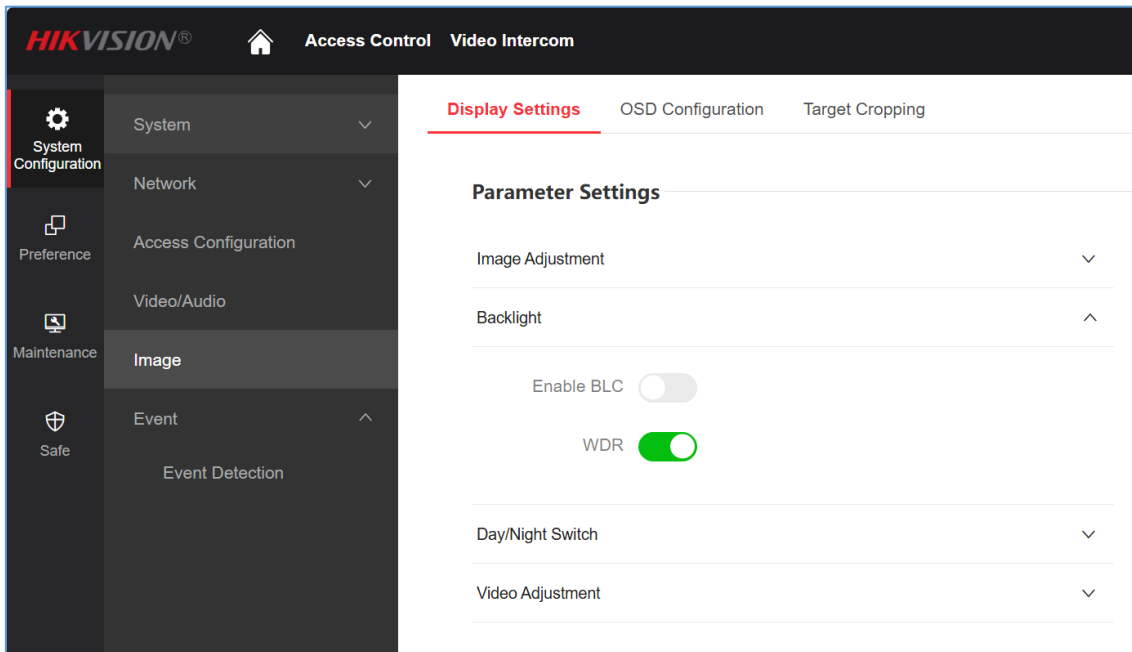

6. Optimize the screen light up logic. When calling from door station, the indoor extension screen will be light up before press the unlock button, maximum support 2 indoor stations screen light up at the same time (1 indoor station + 1 indoor extension)
7. Change the default home page of touch display module to contact list page.

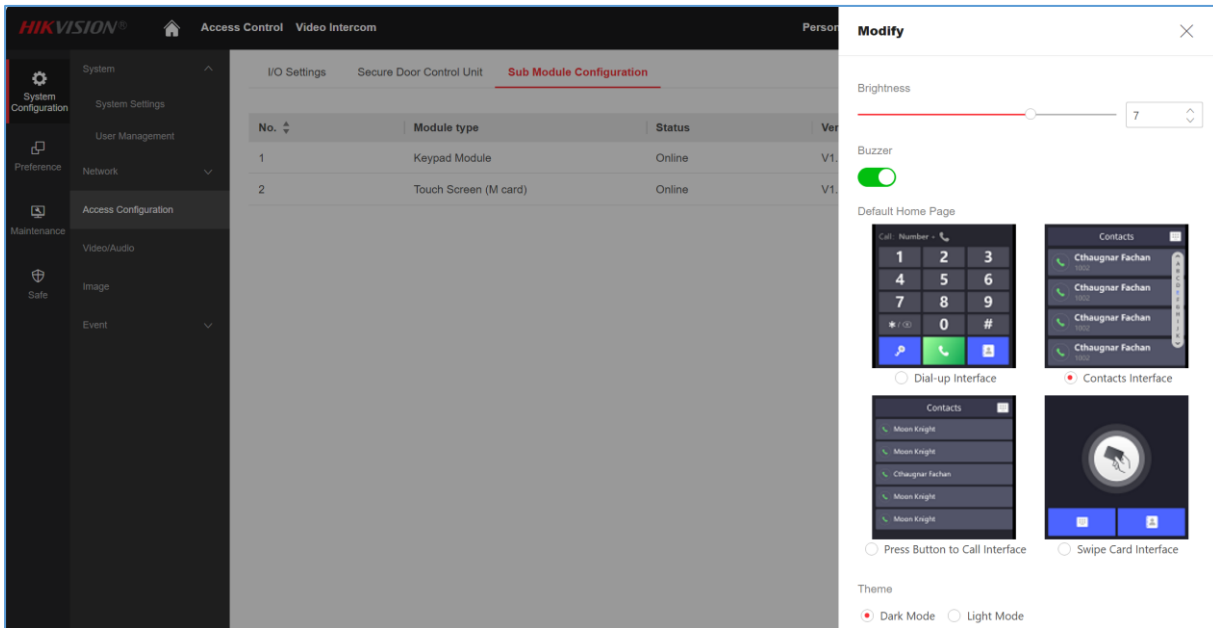

8. Change the default standby picture of touch display module, Make it easy for users and visitors to understand how to use the device.
9. Enlarge the font in the contact list and side bar letters.

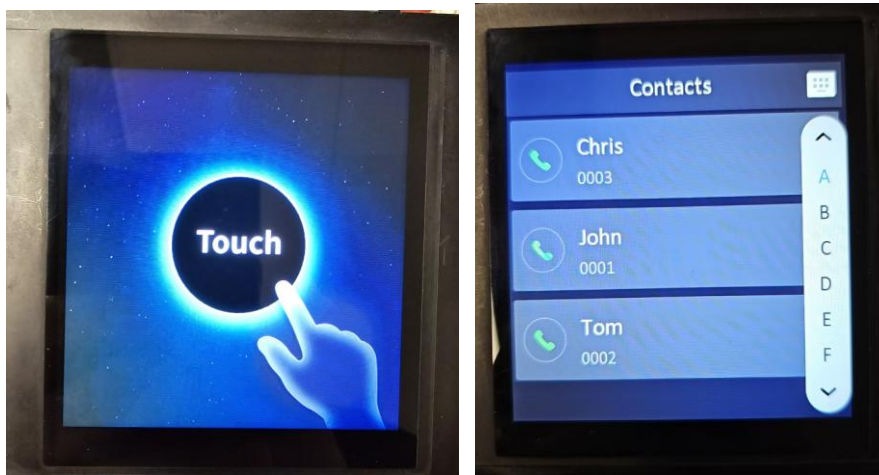

10. Optimize the calling format when the door station works as outer door station:
 - a. The calling format is **building No.#room No.#**
 - b. If input **room No.#** only, there will have a 5s delay to call (configurable in the web page) the **self-defined calling No.**, if it's not configured, then device will call **1#room No.#**, 1 is building No.
11. Optimize the contact list person display order
 - a. If the name only contains letters or letters + digits, then sort by the first letter, if the first letter is same, they will be in random order


- b. If the name only contains digits, then they will be in the end of contact list
- c. If the name contains digits + letters, then sort by the first letter in the name, if the first letter is same, they will be in random order

for example


Name	Room No
Adele	1001
1A	2001
9 Adele	9991
Apache 9	9992
Barry	1002

Indoor Station:

- 1. Improve the UI operability and ease of use for DS-KH7100 non-touch indoor station.
- 2. Improve the audio quality when call from door station to indoor station.
- 3. Support saving device debug logs into TF card, after enable the device will create a folder named “log4j_path” and device logs will be saved automatically in TF card.

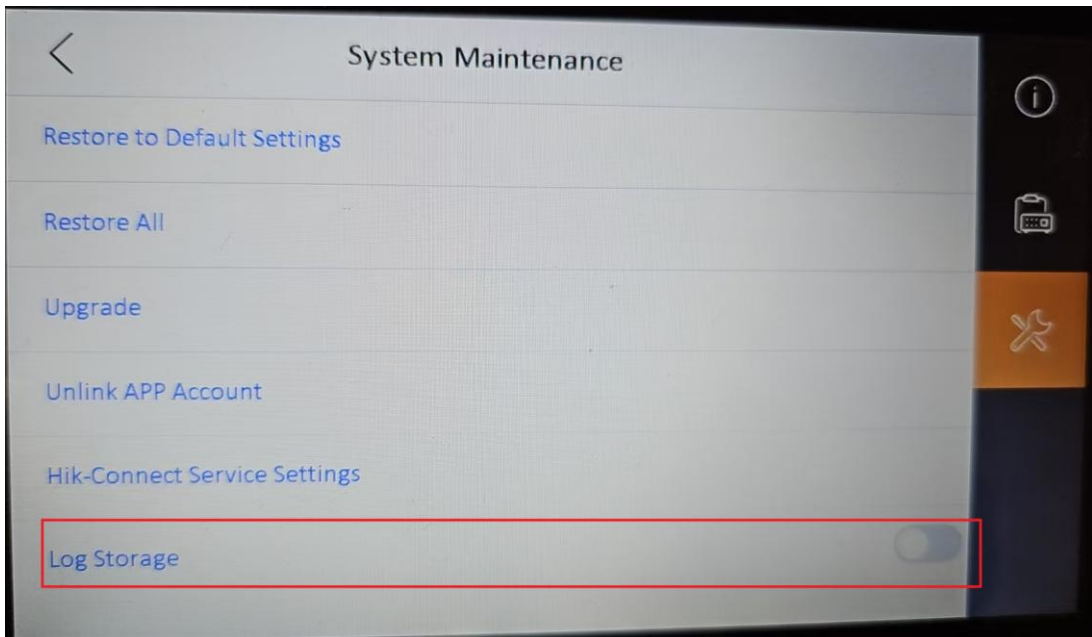

- 4. Add a new ringtone “doorbell_ring”.

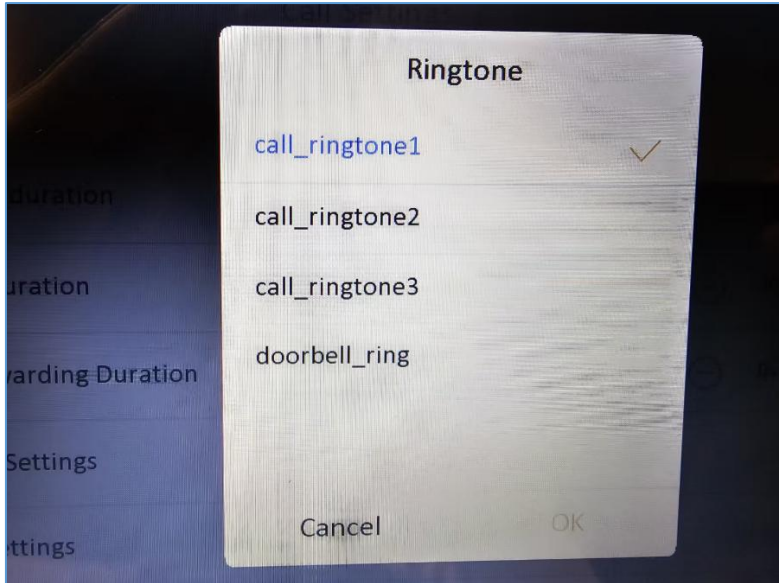

- Upgrade the wifi module firmware to improve the hik-connect function stability, optimized the cloud upgrade process.


2 Wire HD Video Intercom Release Note (2025-03-14)

Device Model	Firmware Version
DS-KH7100EY-E2 DS-KH7100EY-WE2	VIS_INDOOR_B1pro_EN_STD_ V2.2.58_build250306
DS-KH7300EY-THE2 DS-KH7300EY-THIE2 DS-KH7300EY-TIE2 DS-KH7300EY-TE2 DS-KH7300EY-WTE2 DS-KH7300EY-WTHE2 DS-KH7300EY-WTHIE2 DS-KH7300EY-WTIE2 Naming Rule: W for Wi-Fi, H for Handset I for Induction loop, T for TF card	VIS_INDOOR_B1pro_EN_STD_ V2.2.56_build250306

Modified Features


12. Optimize the 4.3 inch indoor station UI


13. Add reboot device option in the menu

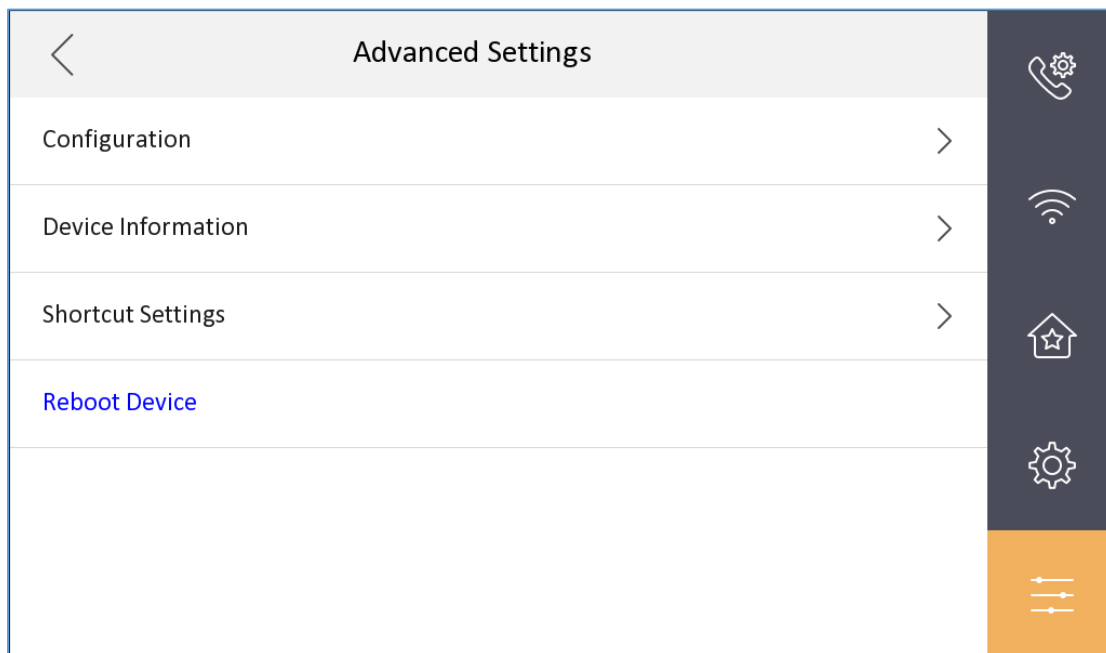

14. Support download firmware (next version) from the cloud and update the indoor station.

Note: a. Only Wi-Fi model support.

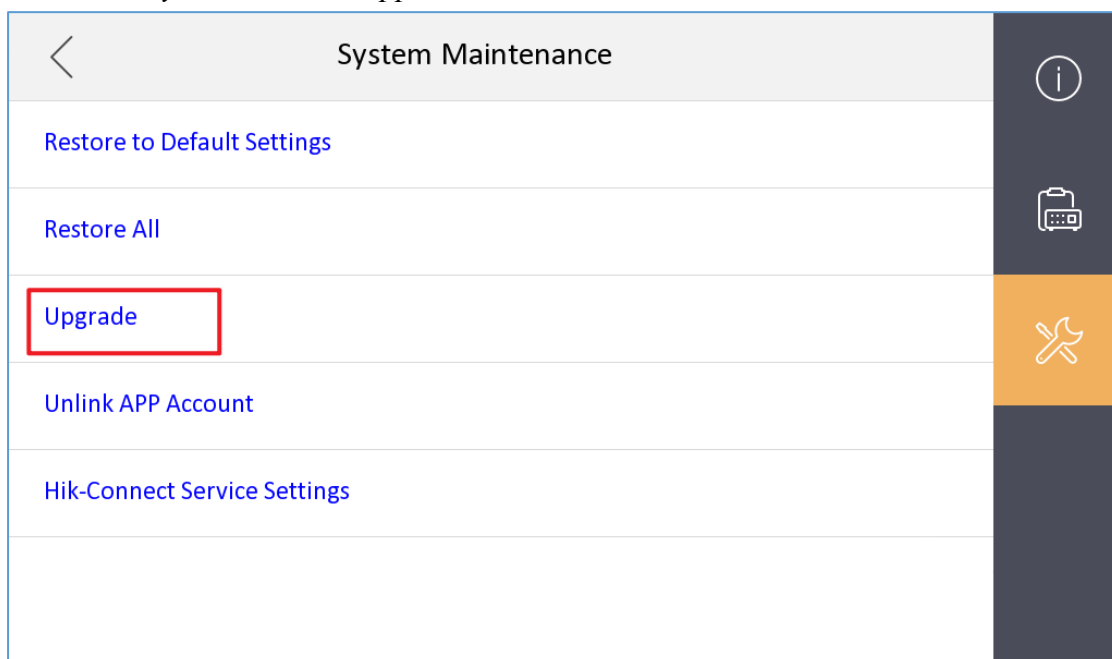

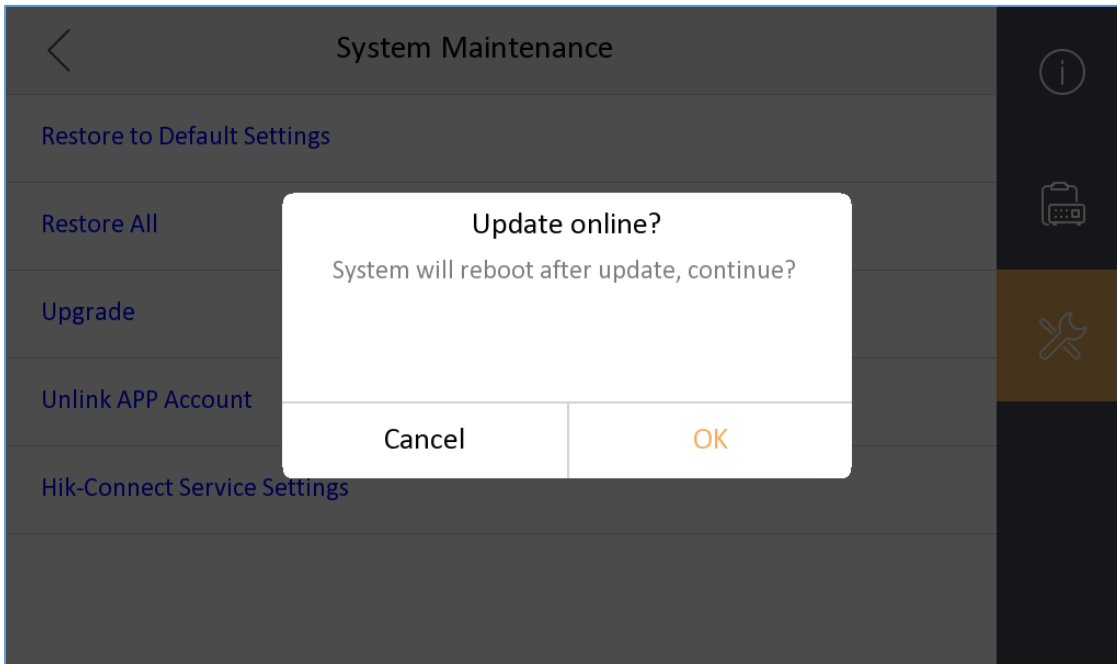

2 Wire HD Video Intercom Solution Release Note (2024-11-07)

Device Model	Firmware Version
DS-KD7003EY-IME2 DS-KD7000EY-ME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.6_build241107
DS-KH7300EY-THE2 DS-KH7300EY-THIE2 DS-KH7300EY-TIE2 DS-KH7300EY-TE2 DS-KH7300EY-WTE2 DS-KH7300EY-WTHE2 DS-KH7300EY-WTHIE2 DS-KH7300EY-WTIE2 Naming Rule: W for Wi-Fi, H for Handset I for Induction loop, T for TF card	VIS_INDOOR_B1pro_EN_STD_V2.2.54_build241107

Modified Features

Door station

Fixed the door station's DST problem

Indoor station

Optimized the WiFi connection of the indoor station (with-W)

2 Wire HD Video Intercom Solution Release Note (2024-10-24)

Device Model	Firmware Version
DS-KD7003EY-IME2 DS-KD7000EY-ME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.6_build241016
DS-KH7300EY-THE2 DS-KH7300EY-THIE2 DS-KH7300EY-TIE2 DS-KH7300EY-TE2 DS-KH7300EY-WTE2 DS-KH7300EY-WTHE2 DS-KH7300EY-WTHIE2 DS-KH7300EY-WTIE2 Naming Rule: W for Wi-Fi, H for Handset I for Induction loop, T for TF card	VIS_INDOOR_B1pro_EN_STD_V2.2.54_build241015
DS-KA-RL1E2	VIS_DS-KA-RL1E2_M4Plus_GML_GM_V1.0.0_build241012

Modified Features

Door station

1. Release new door station



DS-KD7000EY-ME2/Aluminum




DS-KD7000EY-ME2

2. Support relay module

3. Support set the indoor station's shortcut key setting (individual or batch)


Note: only support the 7-inch 2 wire HD indoor station

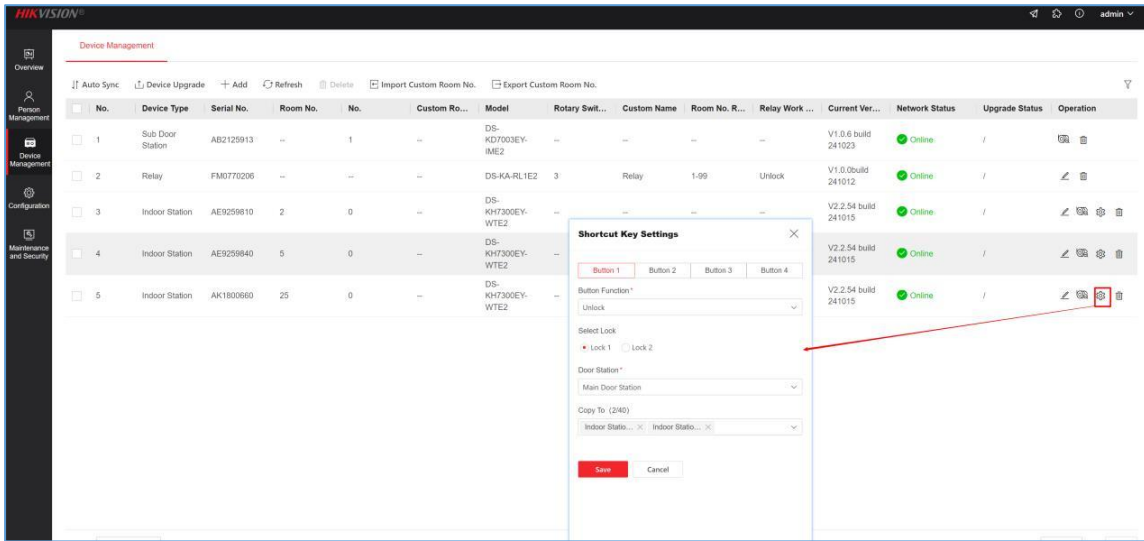

4. Up to two indoor station can be lighted up at the same time

Indoor station


1. Support relay module
2. Configure relay to unlock and turn on the lights through shortcut key

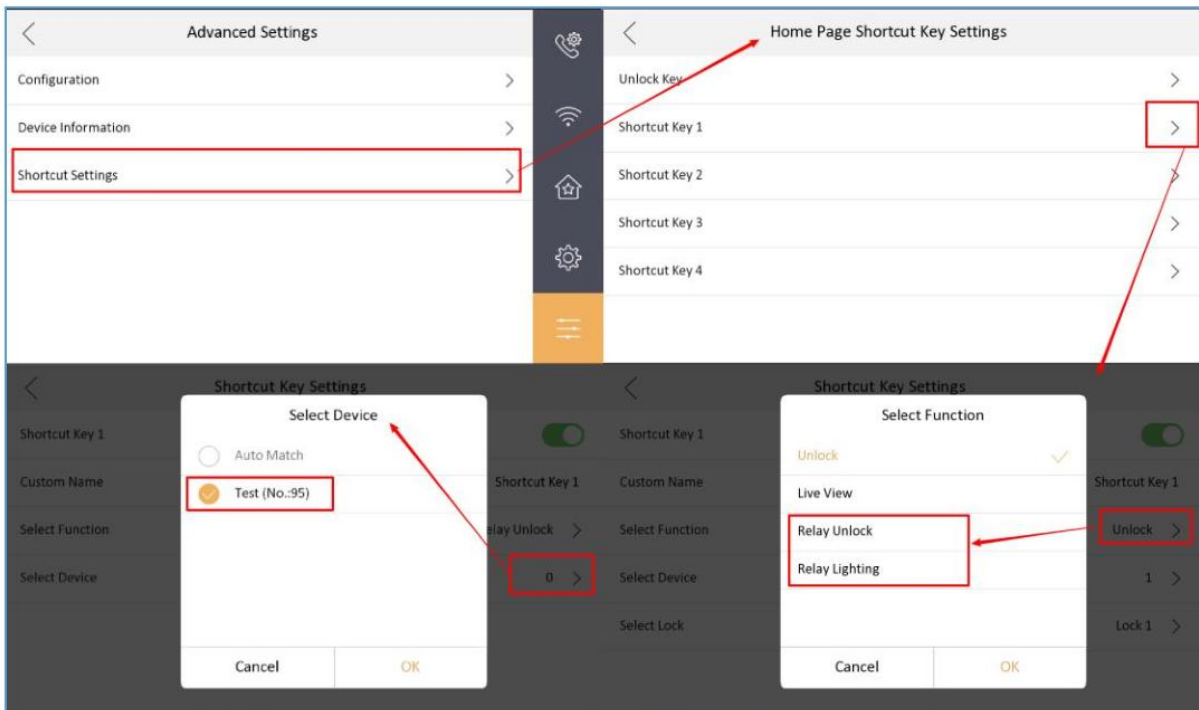




3. Support main door station set the indoor station's shortcut key setting

Note: only support the 7-inch 2 wire HD indoor station

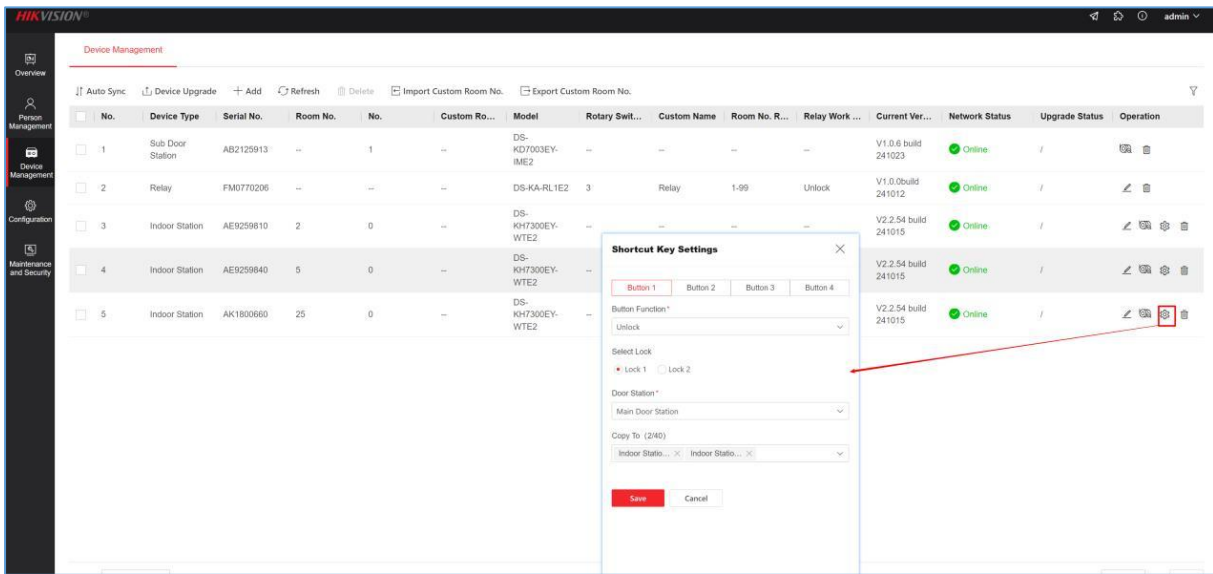

4. Support to set the relay work schedule

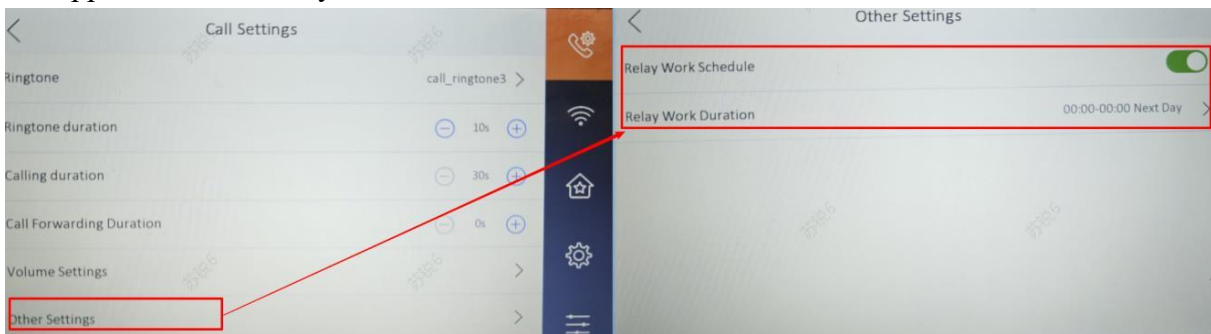

**2 Wire HD Video Intercom Solution Release Note
(2024-08-20)**

Device Model	Firmware Version
Door station: DS-KD7003EY-IME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.4_build240808
DS-KH7300EY-TE2, DS-KH7300EY-WTE2 DS-KH7300EY-THE2, DS-KH7300EY-THIE2 DS-KH7300EY-TIE2, DS-KH7300EY-WTHE2 DS-KH7300EY-WTHIE2, DS-KH7300EY-WTIE2 Naming Rule: W for Wi-Fi, H for Handset I for Induction loop, T for TF card	VIS_INDOOR_B1pro_EN_STD_V2.2.52_build240722
DS-KH7000EY-E2 (4.3 inch audio indoor station)	VIS_INDOOR_M5Plus_EN_STD_V1.0.2_build240719
DS-KD-TDM DS-KD-TDE	VIS_KDDIS_R0_EN_STD_V1.0.2_240510

Reason of Upgrade

Add new features, enhance products quality and meet customers' requirements.

New Features

Indoor station:


1. In live view page, lift the handset to start the two way intercom, and put down the handset to end for the indoor station model with -H (handset)

Indoor station- DS-KH7000EY-E2 only:


1. Support professional studio function. (enable by the 3rd DIP switch, reboot to take effect)



2. When the 4th DIP switch set to ON, the unlock button and 4 self-defined shortcut key will work only during the call or the indoor station is ringing.
If it's default OFF status, the unlock button and 4 keys will always take effect.

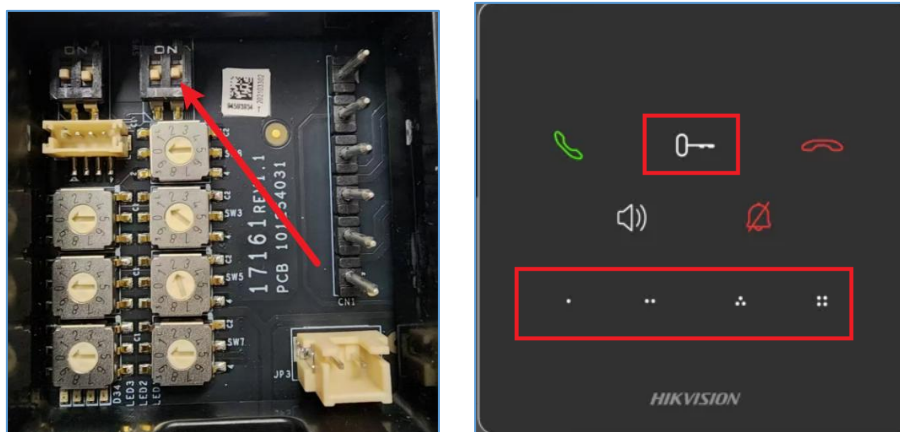

- 3. The volume key is used to adjust the ringtone volume in standby status, and adjust the talk volume in intercom status.

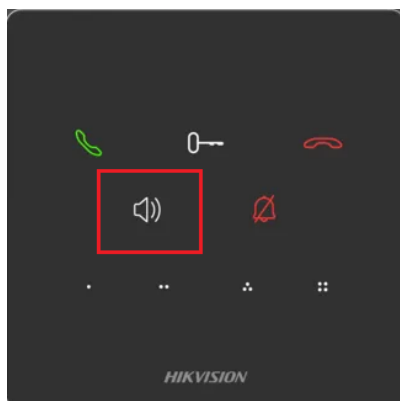

- 4. Add audio prompt when press the button.

2 Wire HD Video Intercom Solution Release Note (2024-07-24)

Device Model	Firmware Version
DS-KD7003EY-IME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.4_ build240710
DS-KH7300EY-TE2, DS-KH7300EY-WTE2 DS-KH7300EY-THE2, DS-KH7300EY-THIE2 DS-KH7300EY-TIE2, DS-KH7300EY-WTHE2 DS-KH7300EY-WTHIE2, DS-KH7300EY-WTIE2	VIS_INDOOR_B1pro_EN_STD_V2.2.46_ build240625
Naming Rule: W for Wi-Fi, H for Handset I for Induction loop, T for TF card	
DS-KD-TDM DS-KD-TDE	VIS_KDDIS_R0_EN_STD_V1.0.2_240510


Reason of Upgrade

Add new features, enhance products quality and meet customers’ requirements.

New Features

Inoor Station:

1. Hardware design change, add a DIP code to support the setting of 100-digit room number, and update firmware to support related settings.

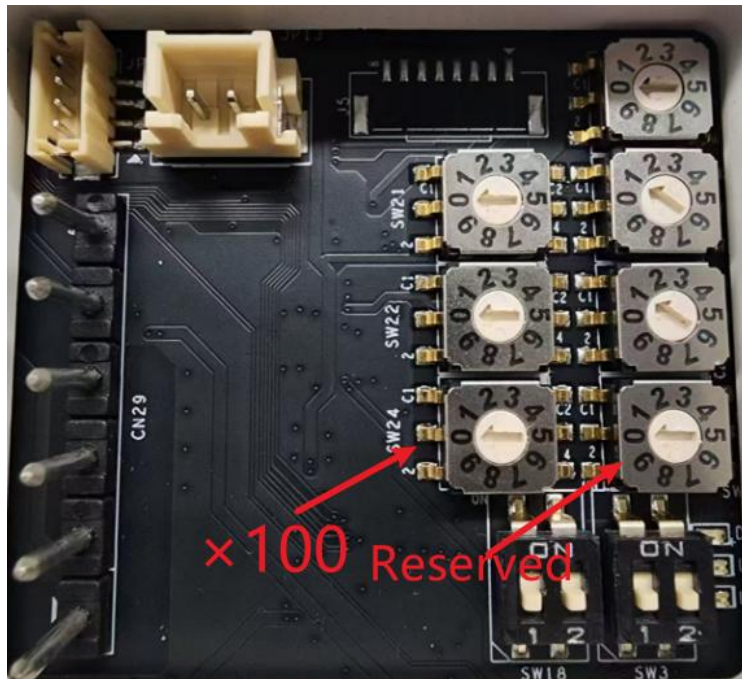

2 Wire HD Video Intercom Solution Release Note

(2024-06-24)

Device Model	Firmware Version
DS-KD7003EY-IME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.4_build240607
DS-KH7300EY-TE2 DS-KH7300EY-WTE2	VIS_INDOOR_B1pro_EN_STD_V2.2.46_build240605
DS-KD-TDM DS-KD-TDE	VIS_KDDIS_R0_EN_STD_V1.0.2_240223


Reason of Upgrade

Add new features, enhance products quality and meet customers' requirements.


New Features

Door Station:

1. Add new languages: עִבְרִית, latviešu valoda, Lietuvių kalba
2. Door station support up to 400 indoor station capacity (should have enough power for whole system)
3. Support the unlocking sound configuration, it can be disabled or set to short beep sound.

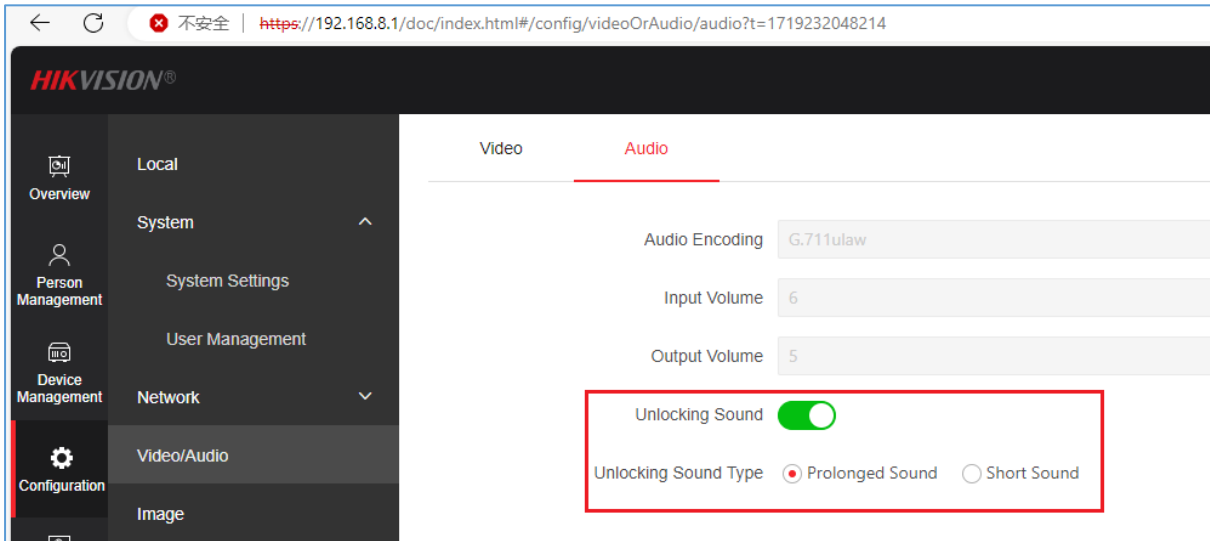


4. When issue card from mobile/PC web, after swipe card on the card module, add a short beep sound prompt to indicate success card reading.

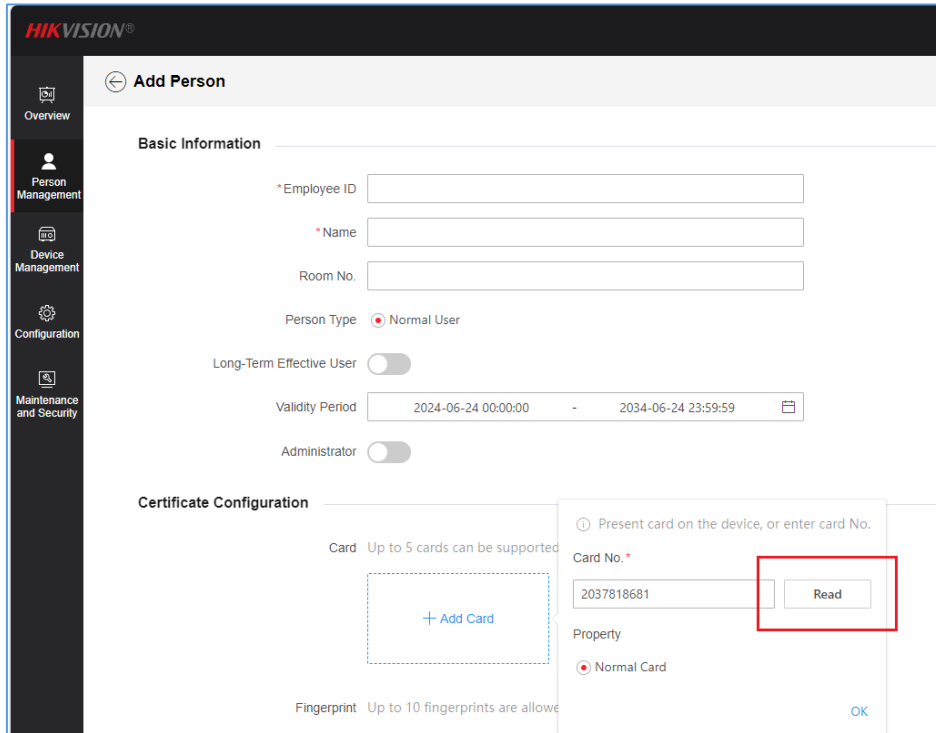

5. Support import and export person data.

Note:

- you can download the template to import.
- when export person data, please set the encryption password, when unzip to excel file, please input the encryption password first.

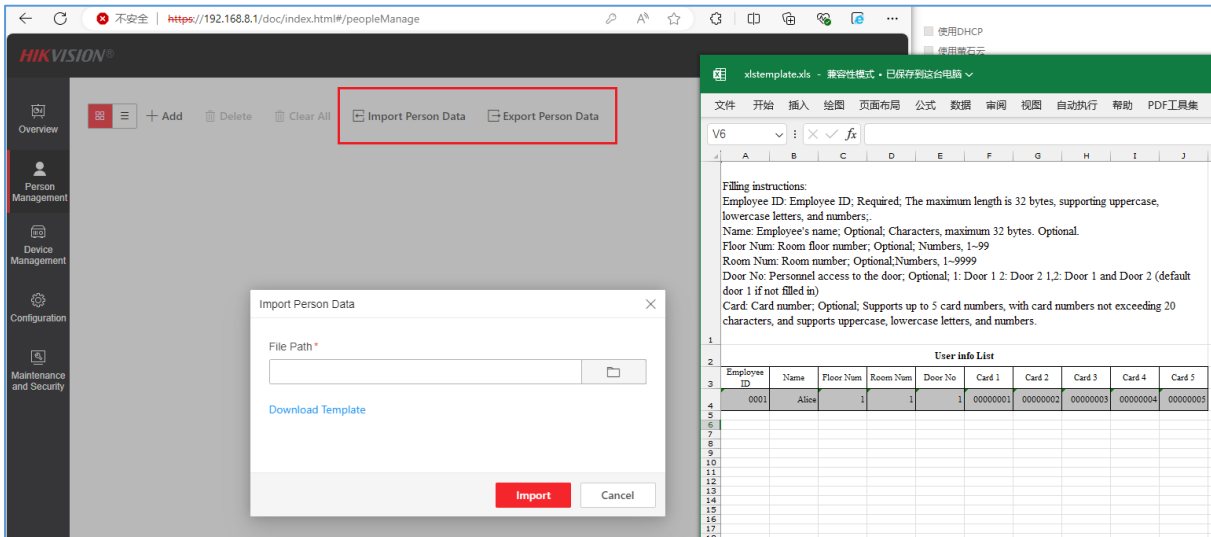

Modified Feature**Door Station:**

1. When the door station is paired with the indoor station, the original custom room number data is retained

Indoor Station

1. Improve the experience of device communication with Hik-Connect in network environment or server instability.

2 Wire HD Video Intercom Solution Release Note (2024-05-15)

Device Model	Firmware Version
DS-KD7003EY-IME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.3_build240422
DS-KH7300EY-TE2 DS-KH7300EY-WTE2	VIS_INDOOR_B1pro_EN_STD_V2.2.38_build240305
DS-KD-TDM DS-KD-TDE	VIS_KDDIS_R0_EN_STD_V1.0.2_240223

Reason of Upgrade


Add new features, enhance products quality and meet customers' requirements.

New Features

1. 1 to 1 pairing and binding with security modules DS-K2M061 is supported, by default it's disabled.

Note:

Only DS-K2M061 V1.0.2_build240506 or later support.

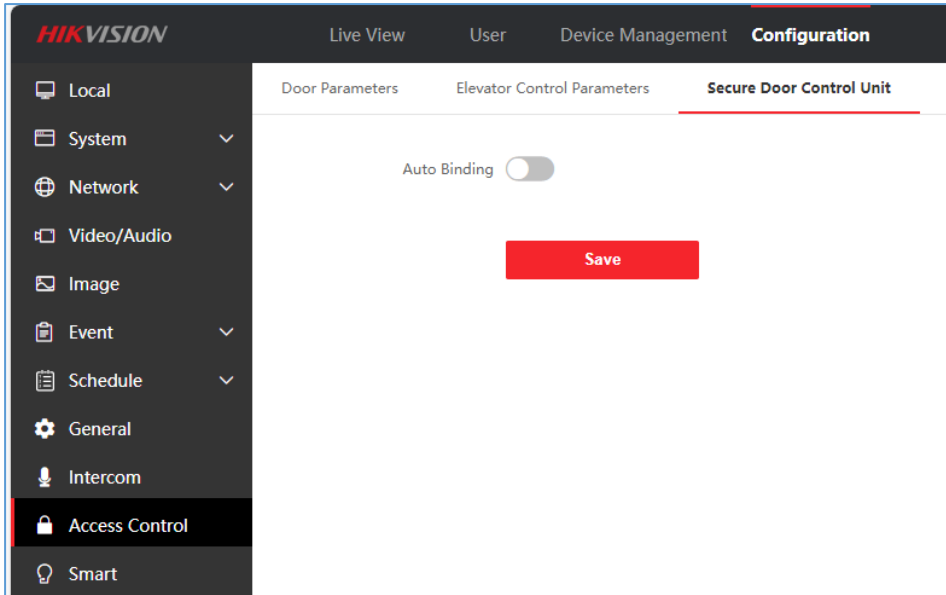

2 Wire HD Video Intercom Solution Release Note (2024-03-12)

Device Model	Firmware Version
DS-KD7003EY-IME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.3_build240226
DS-KH7300EY-TE2 DS-KH7300EY-WTE2	VIS_INDOOR_B1pro_EN_STD_V2.2.38_build240305
DS-KD-TDM DS-KD-TDE	VIS_KDDIS_R0_EN_STD_V1.0.2_240223

Reason of Upgrade

Fix bugs, enhance products quality and meet customers' requirements.

Modified Features

1. Optimize the audio and video effect of the intercom between the door station and the Hik-Connect APP under the condition of poor network (Wi-Fi of the indoor station)
2. Fixed the issue that there is a very small probability that there is no sound (including voice, audio prompt, tamper alarm) from the out door station.

2 Wire HD Video Intercom Solution Release Note (2024-02-15)


Device Model	Firmware Version
DS-KD7003EY-IME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.3_build240204
DS-KH7300EY-TE2 DS-KH7300EY-WTE2	VIS_INDOOR_B1pro_EN_STD_V2.2.32_build231012
DS-KD-TDM DS-KD-TDE	VIS_KDDIS_R0_EN_STD_V1.0.2_240223

Reason of Upgrade

Fix bugs, enhance products quality and meet customers' requirements.


New Features

1. Compatible with new fingerprint & card module DS-KD-MFB (with acrylic front panel) and DS-KD-MFB/S (with stainless front panel), support M1 and Desfire card.

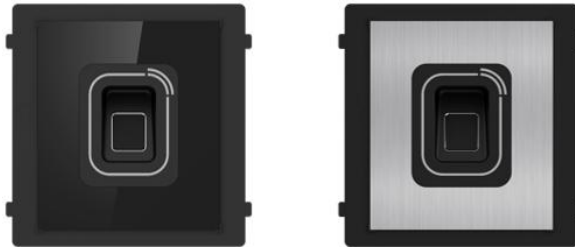

Note: Only support collecting and issuing fingerprints from the main module's web remote configuration, not support the use of iVMS-4200 to collect the fingerprints.

2. Compatible with new touch display module firmware V1.0.2_build240223, and we can configure theme from remote configuration-sub module page.

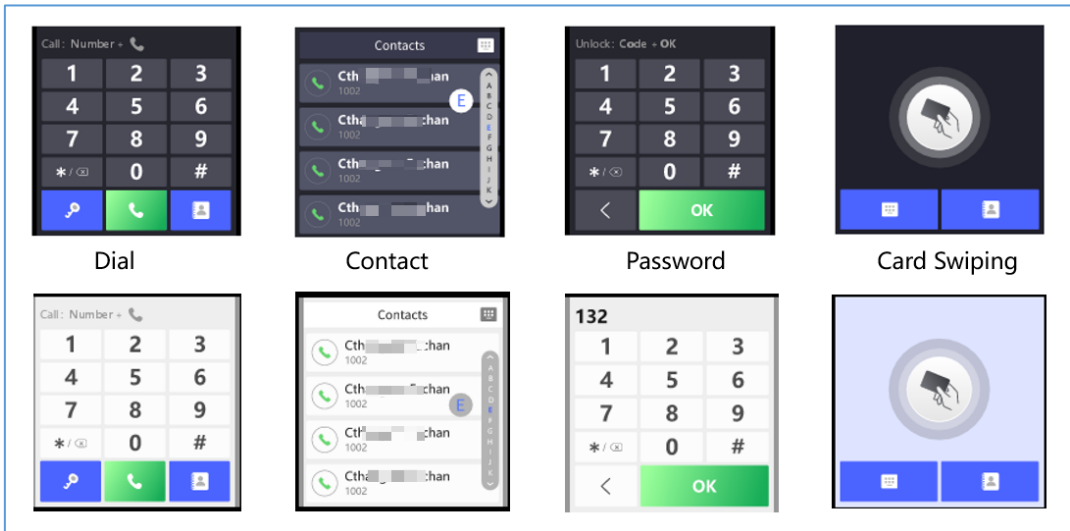

2 Wire HD Video Intercom Solution Release Note (2023-12-15)

Device Model	Firmware Version
DS-KD7003EY-IME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.2_build231208
DS-KH7300EY-TE2 DS-KH7300EY-WTE2	VIS_INDOOR_B1pro_EN_STD_V2.2.32_build231012
DS-KD-TDM DS-KD-TDE	VIS_KDDIS_R0_EN_STD_V1.0.1_231008

Reason of Upgrade


Fix bugs, enhance products quality and meet customers’ requirements.

Modified Features

- Compatible with new released 12 key nametag module DS-KD-K12 and DS-KD-K12/S



- Update the default button No. (room number) image.

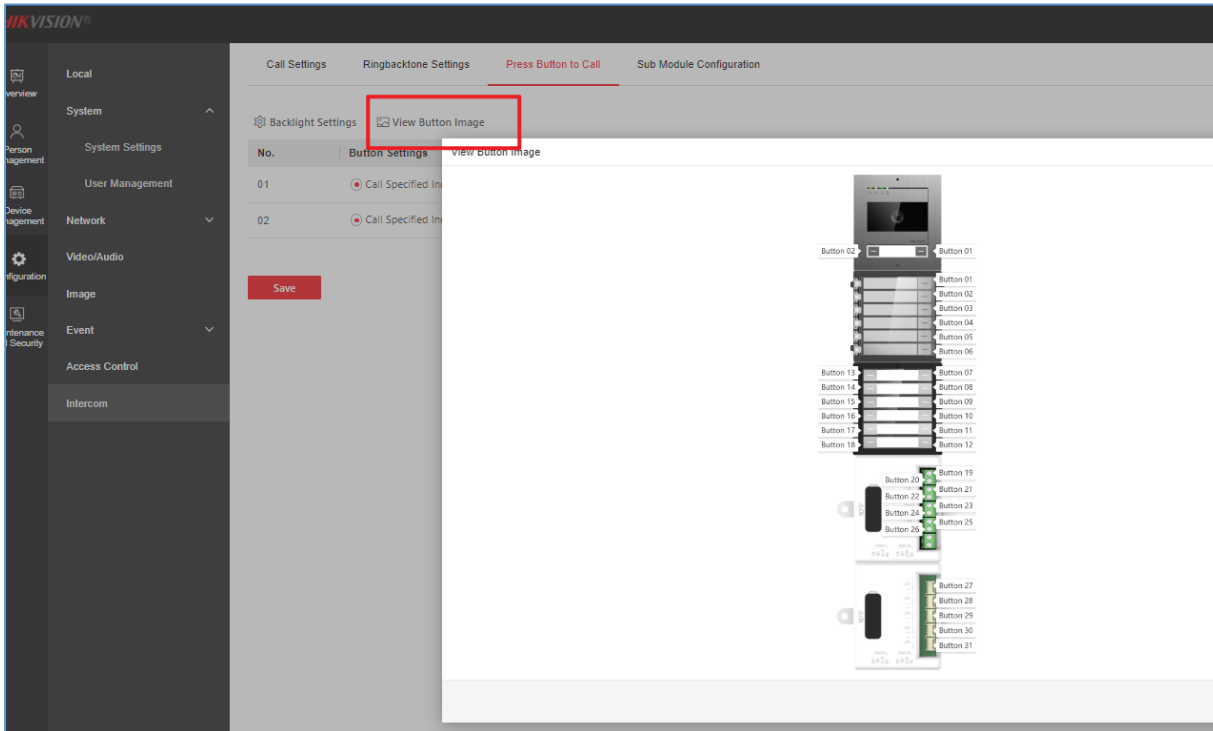

2 Wire HD Video Intercom Solution Release Note (2023-10-25)

Device Model	Firmware Version
DS-KD7003EY-IME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.1_build231019
DS-KH7300EY-TE2 DS-KH7300EY-WTE2	VIS_INDOOR_B1pro_EN_STD_V2.2.32_build231012
DS-KD-TDM DS-KD-TDE	VIS_KDDIS_R0_EN_STD_V1.0.1_231008

Reason of Upgrade

Fix bugs, enhance products quality and meet customers' requirements.

Modified Features

- Optimize Italian language translation in mobile phone web interface

2 Wire HD Video Intercom Solution Release Note (2023-10-16)

Device Model	Firmware Version
DS-KD7003EY-IME2	VIS_OUTDOOR_F2pro_EN_STD_V1.0.1_build231012
DS-KH7300EY-TE2 DS-KH7300EY-WTE2	VIS_INDOOR_B1pro_EN_STD_V2.2.32_build231012
DS-KD-TDM DS-KD-TDE	VIS_KDDIS_R0_EN_STD_V1.0.1_231008

Reason of Upgrade

Video intercom 2-Wire HD solution first time released.



New Features

Door Station-KD7003 main module

- Excellent Product Design: HD images and wide viewing angle (Horizontal: 133°, Vertical: 82°) with WDR
- Excellent Product Design: IP65&IK08 protection level, compatible with released sub-modules (DIS is not supported for now)
- Easy to Use: Support mobile web configuration (AP mode)
- Easy to Use: DEC knobs configuration, Plug & play
- Easy to Use: Multiple indicators--Opening door, calling, on call, in use
- Easy to Use: Single and double buttons can be freely adjusted
- Supports two-lock control (lock1 for pulse lock, lock2 for magnetic/door strike/electric bolt)

Capacity:

User capacity: 2000

Linked indoor station capacity: Max.99

Sub door station capacity: 16

Indoor Station-KH7300

- Excellent Product Design: 7-inch touch screen with 1024*600 high resolution
- Excellent Product Design: 3 touch buttons, physically challenged friendly
- Easy to Use: DEC knobs configuration;
- Easy to Use: Plug & play, support different connection topologies
- Easy to Use: Supports Hik-Connect App (model with W only)
- Easy to Use: Multiple indicators--Wi-Fi, power, mute, in use
- Easy to Use: Max. 4 custom virtual buttons
- View live image of door stations
- Support Professional Studio / Trade button function (Open doors automatically)
- Supports Floor Call (trigger alarm input and indoor station will prompt with audio)

For more information about 2 wire HD products, please refer to the QSG and user manual of device on website:

<https://www.hikvision.com/en/products/Video-Intercom-Products/2-wire-Series/2-wire-hd/?category=Video+Intercom+&subCategory=2-Wire+Series&series=2+Wire+HD&checkedSubSeries=NONE>

Customer Impact and Recommended Action

This update refers to function/compatibility improvement and will take effect automatically after the Date of Change. We are very sorry for any inconvenience of use-habit changes caused by this action.

For any questions and request for this firmware, please contact our local technical support team.

Note:

- Hikvision reserves the right to change, alter or withdraw the above notification without prior notice.
- Product design and specifications are subject to change without prior notice.
- The Hikvision firmware may contain errors known as errata, which may cause the product to deviate from published specifications. Current characterized errata are available on request.
- Hikvision is not liable for any typing or printing errors.

Hikvision Digital Technology CO., Ltd.
No. 555 Qianmo Road, Binjiang District, Hangzhou 310051,
China
Tel: +86-571-8807-5998
FAX: +86-571-8993-5635
Email: overseabusiness@hikvision.com