

## Axis EN Wireless Translator Module

The Axis EN Wireless Translator Module is the core component of the Axis EN intelligent hybrid fire detection and alarm system.

When connected on to a compatible loop, the unit is capable of linking up to 128 fully intelligent wireless field devices with the fire alarm system. All wireless communications rely on a channel pair for spurious RF noise rejection and maximum link reliability.

The translator allows fully intelligent and seamless integration of the wireless devices alongside standard wired devices or can be used independently to form completely wireless systems. Using cutting edge wireless technology and a proprietary orthogonal antenna design it ensures the highest levels of life safety and system reliability.



### Features

- Loop powered or via external power supply unit
- Bi-directional wireless communication
- Compatible with up to 15 expander modules
- Mesh expander technology programmable for redundant path to the translator
- Internal antennae design protects from environmental conditions, vandalism, accidental damage or misuse
- Low current consumption
- 8 pairs of network channels
- Dual channel redundancy
- Long communication range
- Full analogue data availability (eg optical and thermal value, link quality, battery status, chamber drift compensation status)
- Site programmable via internal keypad, or via wireless or wired PC connection
- Full system programming capability from the translator
- Easy scan & link programming option

### Standards and Approvals

- EN54-17: Short Circuit Isolators
- EN54-18: Input/Output Devices
- EN54-25: Components using radio links and system requirements


Specification

|                               |                      |
|-------------------------------|----------------------|
| Loop power supply range       | 18Vdc to 40Vdc       |
| Operating frequency range     | 868 - 870 MHz        |
| Max radiated power            | 14dBm (25 mW)        |
| IP rating                     | 65                   |
| Operating temperature         | -10°C to +55°C       |
| Max humidity (non condensing) | 90% RH               |
| Typical current consumption   | 16mA (@ 24Vdc)       |
| Dimensions H x W x D mm       | 235mm x 160mm x 70mm |
| Weight                        | 700g                 |

Order Codes and Options

|          |                                    |
|----------|------------------------------------|
| Axis-TMT | Axis EN Wireless Translator Module |
|----------|------------------------------------|

Technical Information

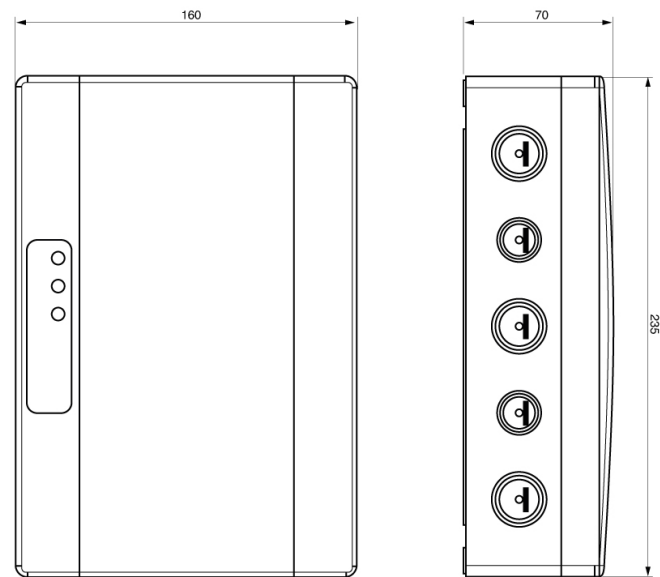

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK **T:** +44 (0)345 894 7000, **E:** [enquiries@advancedco.com](mailto:enquiries@advancedco.com),  
**W:** [www.advancedco.com](http://www.advancedco.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.