
Relay Switch

WBXVHLR1224

ADI PRO

Multi Purpose Relay 8A 12/24V

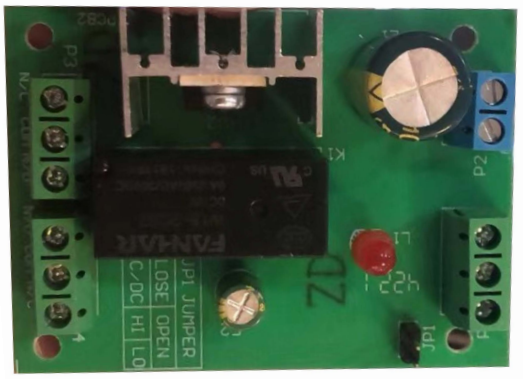

WBXVHLR1224

Features

- Supply Voltage : 9-30VAC / 10.5-36VDC
- Coil resistance: 360 Ohms
- Nominal Current: 24mA
- Min Switching current: 10mA (to keep contacts clean)
- Double Pole Relay rated at 8A at 240VAC or 8A at 30VDC
- Dimensions: 68 x 50 x 30mm
- 3 Years Warranty

UPC: 840049305083

PART #: WBXVHLR1224

For more information contact your ADI sales person or visit us at www.adiglobal.com

Rev: Jul 24

CE UKCA RoHS COMPLIANT

Relay Switch

WBXVHLR1224

Operating Modes:

Mode 1: To control the relay from switched supply
Keep JP1 Jumper closed, connect: 9~30VAC / 10.5~36VDC to AC/DC IN terminal , the supply voltage will activate the relay.
Mode 2: To control the relay from a low current source


a) Activate From A HIGH Trigger: Keep JP1 Jumper open, connect 9~30VAC / 10.5~36VDC to AC/DC IN terminal; connect HI to the trigger source. Every time that voltage rises on the HI terminal, the relay will be activated.

b) Activate From A LOW Trigger: Keep JP1 Jumper open, connect 9~30VAC / 10.5~36VDC to AC/DC IN terminal; connect LO to the trigger source. Every time that voltage drops on the LO terminal, the relay will be activated.

Note: when working power is AC voltage, or trigger signal's GND is different from working power's GND, must connect trigger signal's GND to VO

Product Description

This AC/DC relay is a universal relay as it will work on 9~30VAC / DC10.5~36 VDC, and is a simple to fit module wherever a dry contact, voltage free switching is required or where there is a need for higher than usual currents and voltages to be switched. The DPDT(double pole double throw) Relay rated at 8 Amps,can be activated by power supply/high signal/low signal,to switch two outputs at same time.

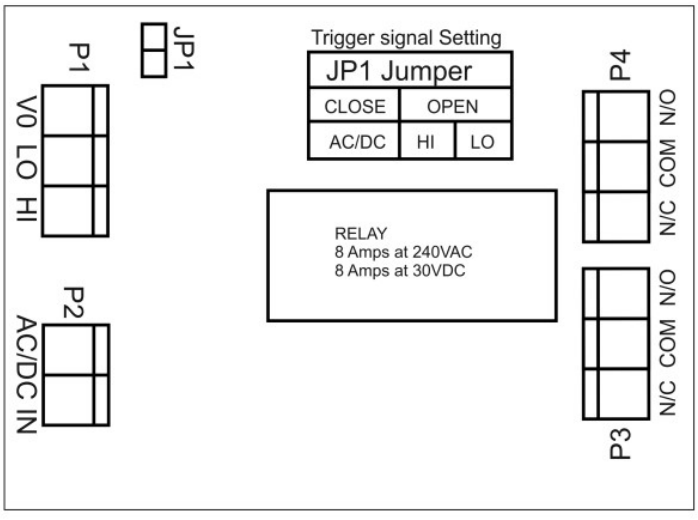

PART #: WBXVHLR1224
For more information contact your ADI sales person or visit us at www.adiglobal.com

Rev: Jul 24