

ESB1000

ADDRESSABLE BASES WITH VISUAL/AUDIBLE ALARM INDICATOR



ESB1010
ESB1011
ESB1030




ESB1020
ESB1021
ESB1050

Base for Enea series detectors with visual/audible alarm indicator, equipped with own address and capable of changing tone (or voice message, for versions with the voice function) in accordance with the situation, IP21 protection rated.

Volume, flash intensity and sound sequences can be selected choosing from 14 tones on-board the device (and 16 voice messages available in 8 different languages, only for versions with the voice function).

For models with the voice function, it is also possible to customize tones/voice messages by means of the EDRV2000.


The device is powered via the loop but is equipped with terminals for an optional separate power input.

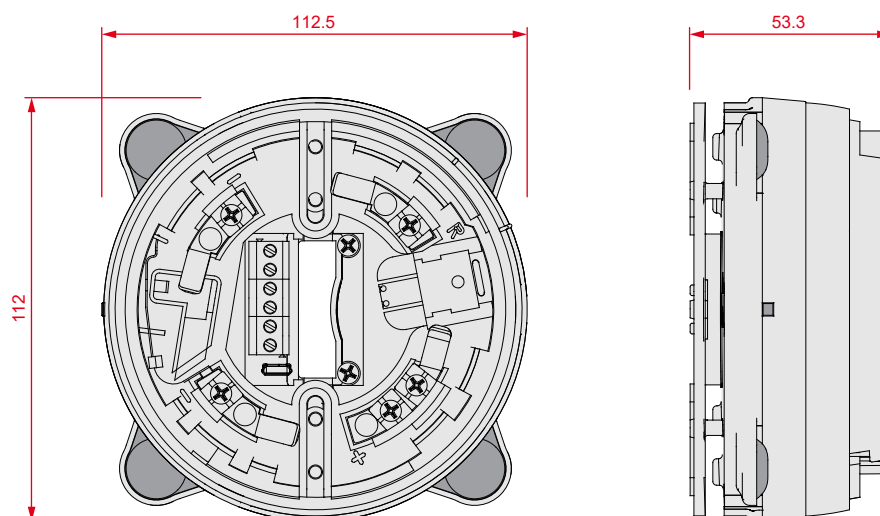


Main features

	ESB1010	ESB1011	ESB1020	ESB1021	ESB1030	ESB1050
Operating voltage	18 - 30V $\overline{\sim}$	20 - 30V $\overline{\sim}$	18 - 30V $\overline{\sim}$	20 - 30V $\overline{\sim}$	18 - 30V $\overline{\sim}$	18 - 30V $\overline{\sim}$
Stand-by current draw	200 μ A	500 μ A	200 μ A	500 μ A	200 μ A	200 μ A
Maximum current draw	25mA	5mA	40mA	23mA	25mA	40mA
Installation method	Ceiling, under detector					
Maximum installation height	-	-	3m	3m	-	3m
Light coverage according to EN54-23	-	-	C-3-10 O-4-10	C-3-8 O-3.3-8	-	C-3-10 O-4-10
Flash frequency	-	-	0.5Hz	0.5Hz	-	0.5Hz
Flash color	-	-	White	White	-	White
Number of selectable tones	14	14	14	14	104	104
Sound pressure at 1 mt.	98dB					
IP Protection grade	IP21					
Operating temperature	from -10 to 55°C					
Synchronization	Yes					
Multicolor indicating LED	Yes					
Detector base included	Yes					
Built-in short-circuit isolator (EN54-17)	Yes					
Dimensions	112 x 112,5 x 53,3 mm					
Weight	200 g	200 g	220 g	220 g	200 g	220 g

FLASH COVERAGE VOLUME

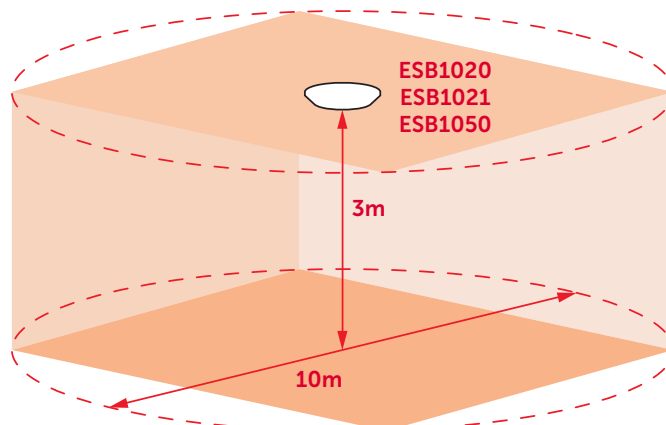

CONFIGURATION DIAGRAM

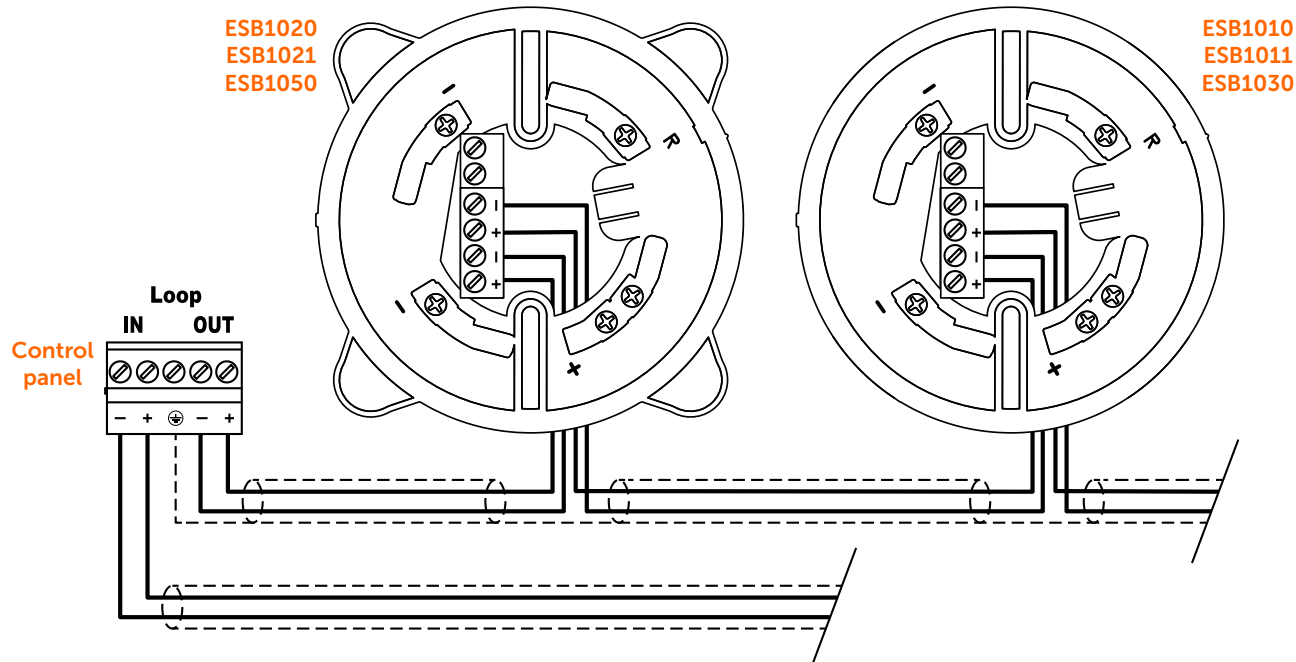

ORDER CODES

- ESB1010** Addressable base with audible signalling
- ESB1011** Addressable base with audible signalling, low power consumption
- ESB1020** Addressable base with audible/visual signalling
- ESB1021** Addressable base with audible/visual signalling, low power consumption
- ESB1030** Addressable base with audible signalling and voice functions
- ESB1050** Addressable base with audible/visual signalling and voice functions