

**DS-D5043U3-1V0S(海外标配)(欧标)
43 inch UHD 60Hz VA Monitor(EU)**



- Ultra HD 3840 ×2160 @60 Hz.
- Wide viewing angle: Horizontal 178°, Vertical 178°.
- Ultra-thin device body with ultra-thin border for 3 sides.
- Multiple interfaces: VGA, HDMI, USB 2.0
- Build-in speaker, Audio 10W*2.
- Low blue light design for eye care.
- 3D noise reduction.
- Support VESA wall mount.

▪ Specification

Display	
Screen Size	43 inch
Active Display Area	941.184 (H) mm × 529.416 (V) mm
Resolution	3840 × 2160 @60 Hz
Backlight	D-LED
Pixel Pitch	0.2451 (H) × 0.2451 (V) mm
Brightness	300 cd/m ²
Viewing Angle	178° / 178°
Color Depth	8 bit+FRC
Contrast Ratio	4000 : 1
Response Time	6.5 ms (typ)
Refresh Rate	60 Hz
Haze	25%
Color Gamut	72% NTSC
Reliability	7 * 24H
Interface	
Video & Audio Input	HDMI ×1 , DP × 1 , VGA × 1 , LINE IN × 1
Video & Audio Output	Speaker OUT × 2 (8Ω 10W)
Data Transmission Interface	USB2.0 × 1
Control Interface	RS232-IN × 1 , RS232-OUT × 1
Power	
Power Supply	100-240 V ~ , 50/60 Hz, 1.0 A Max
Power Consumption	≤80W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% ~ 90% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	5% ~ 90% RH (Non-Condensing)
General	
Speaker	8 Ω 10 W ×2
Casing Material	Plastic
VESA	200 mm × 200 mm (4 - M6 × 8 mm)
Bezel Width	1.1 mm (top/left/right) , 24 mm (bottom)
Product Dimensions (W × H × D)	Without base : 956.7(W) mm × 561.65(H) mm × 76.06(D) mm 37.67(W) inch × 22.11 (H) inch × 2.99 (D) inch , With base : 956.7(W) mm × 616.21(H) mm × 242.11(D) mm 37.67 (W) inch × 24.26 (H) inch × 9.53 (D) inch
Package Dimensions (W × H × D)	1073(W)mm×668(H)mm×161(D) mm (42.24 (W) × 26.3 (H) × 6.34 (D)) inch
Net Weight	6.81 ± 0.5 kg (15.01 ± 1.1 lb.)
Gross Weight	9.88 ± 0.5 kg (21.78 ± 1.1 lb.)

Packing List	Monitor × 1, Base component × 1, Power cable × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1, Remote control × 1, Screw × 6
Remarks	*The base is included by default. *The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information.

▪ Physical Interface




Interface	Description	Interface	Description
AC	AC, 100-240V~,50/60Hz,1.0A Max,input interface	HDMI	HDMI 1.4 digital signal input interface
USB	USB2.0,input interface	Audio In	3.5mm Audio input interface
RS232-IN	RS232-IN,input interface	RS232-OUT	RS232-OUT,output interface
DP	DP 1.2 digital signal input interface	VGA	VGA analog signal input interface

▪ Available Model


DS-D5043U3-1V0S

▪ Dimension

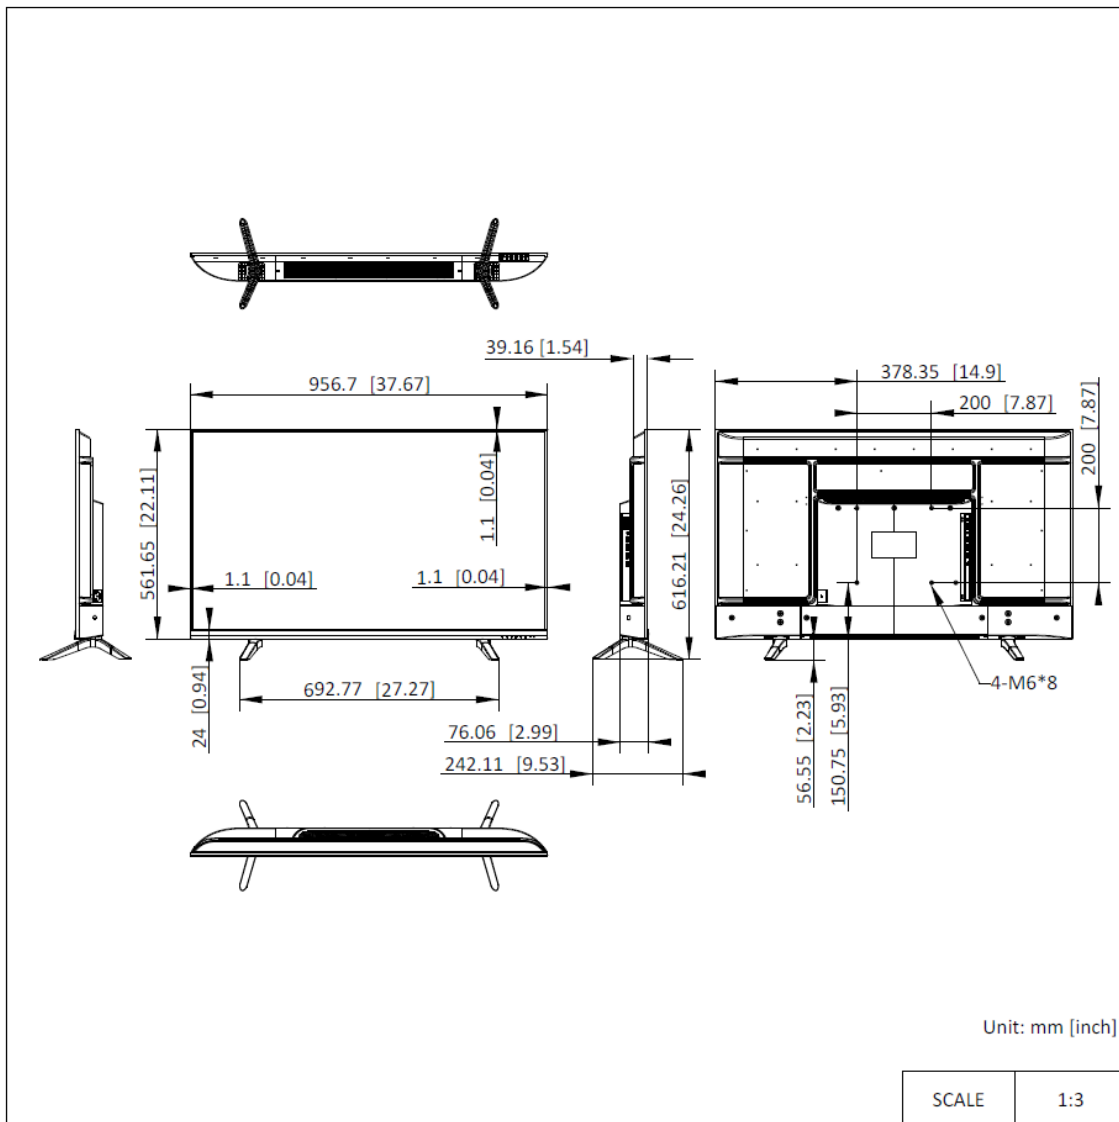

- Accessory
- Optional

DS-DM4255W



See Far, Go Further



www.hikvision.com
support@hikvision.com

