

# Full-Color Dome Network Camera

MODEL: InSight S285



People & Vehicle  
Analytics\*

Human & Vehicle  
Classification

Smart  
Detection


Two Way  
Audio

## // Human & Vehicle Classification

Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



## // Smart Detection



Intrusion  
Detection




Line-Crossing  
Detection



Object Removal  
Detection



Object Abandoned  
Detection



Scene Change  
Detection



Region Entering  
Detection



Region Exiting  
Detection



Loitering  
Detection




Abnormal Sound  
Detection

## // VIGI Surveillance Solution


The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

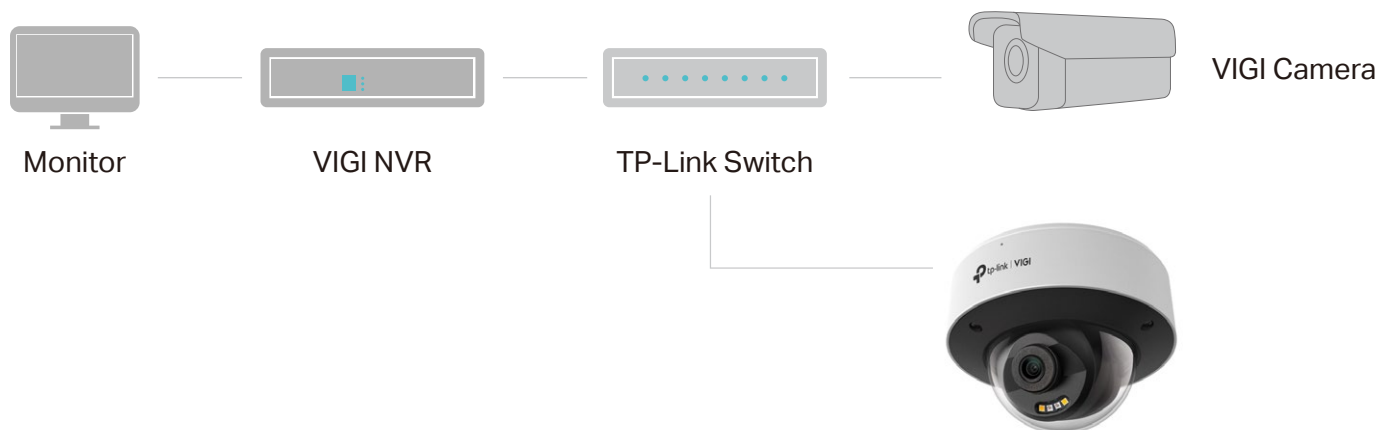

## // Flexible Installation

Easily route your camera's cable into a dropped ceiling or avoid drilling by slotting it through the camera's side outlet.

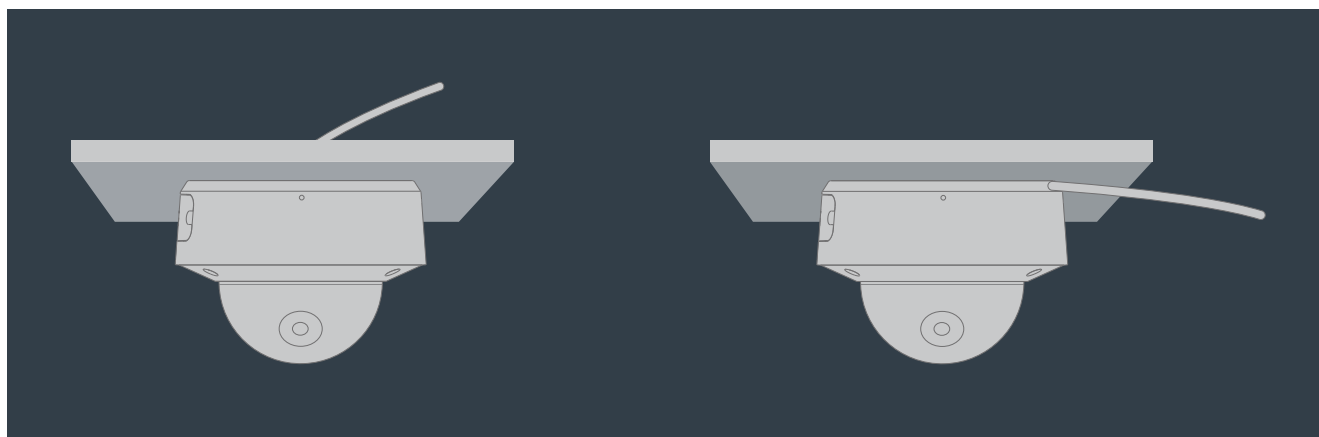

## // Specifications

| Camera              |                                                                                                                                                                                                                                                                                                 |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Model       | InSight S285                                                                                                                                                                                                                                                                                    |
| Image Sensor        | 1/2.7" Progressive Scan CMOS                                                                                                                                                                                                                                                                    |
| Shutter Speed       | 1/3 to 1/10000 s                                                                                                                                                                                                                                                                                |
| Slow Shutter        | Yes                                                                                                                                                                                                                                                                                             |
| Min. Illumination   | 0.005 Lux; 0 Lux with IR/White light                                                                                                                                                                                                                                                            |
| Day/Night Mechanism | IR Cut Filter                                                                                                                                                                                                                                                                                   |
| Day/Night Switch    | Unified/ Scheduled/ Auto                                                                                                                                                                                                                                                                        |
| Lens                |                                                                                                                                                                                                                                                                                                 |
| Type                | Fixed Focal Lens                                                                                                                                                                                                                                                                                |
| Focal Length        | 2.8 mm / 4 mm                                                                                                                                                                                                                                                                                   |
| Aperture            | F1.6                                                                                                                                                                                                                                                                                            |
| FOV                 | <ul style="list-style-type: none"><li>• 2.8 mm:<br/>Horizontal FOV: 110°, Vertical FOV: 58.1°, Diagonal FOV: 133.5°</li><li>• 4 mm:<br/>Horizontal FOV: 88°, Vertical FOV: 46°, Diagonal FOV: 105.4°</li></ul>                                                                                  |
| Lens Mount          | M12*P 0.5                                                                                                                                                                                                                                                                                       |
| DORI Distance       | <ul style="list-style-type: none"><li>• 2.8 mm<br/>Detect: 85 m (278 ft)<br/>Observe: 35 m (116 ft)<br/>Recognize: 17 m (56 ft)<br/>Identify: 8 m (28 ft)</li><li>• 4 mm<br/>Detect: 107 m (350 ft)<br/>Observe: 44 m (146 ft)<br/>Recognize: 21 m (70 ft)<br/>Identify: 11 m (35 ft)</li></ul> |

| Angle Adjustment (Manual)  |                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range                      | Pan: 0° to 346°, Tilt: 0° to 75°, Rotation: 0° to 355°                                                                                                                                                                                                                                                                                                                                                                             |
| Illuminator                |                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| IR LED                     | <ul style="list-style-type: none"> <li>• Quantity: 2</li> <li>• Range: 30m</li> <li>• Wavelength: 850nm</li> </ul>                                                                                                                                                                                                                                                                                                                 |
| White LED                  | <ul style="list-style-type: none"> <li>• Quantity: 2</li> <li>• Range: 30m</li> </ul>                                                                                                                                                                                                                                                                                                                                              |
| Illuminator On/Off Control | Auto/Scheduled/Always on/Always off                                                                                                                                                                                                                                                                                                                                                                                                |
| Video                      |                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Max. Resolution            | 3840 x 2160                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Main Stream                | <ul style="list-style-type: none"> <li>• Frame Rate:<br/>50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps<br/>60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps</li> <li>• Resolution:<br/>3840x2160, 2560x1440, 2304x1296, 2048x1280, 1920x1080, 1280x720</li> </ul> <p>Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps. If HDR is turned on, the frame rate can only support up to 20fps.</p> |
| Sub-Stream                 | <ul style="list-style-type: none"> <li>• Frame Rate:<br/>50Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps<br/>60Hz: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps</li> <li>• Resolution:<br/>848x480, 704x576, 640x480, 640x360, 352x288, 320x240</li> </ul> <p>Note: If the image rotation is set to 90° or 270°, the frame rate only supports up to 20fps. If HDR is turned on, the frame rate can only support up to 20fps.</p>            |
| Bit Rate Control           | CBR, VBR                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Video Compression          | <ul style="list-style-type: none"> <li>• Main Stream: H.265+/H.265/H.264+/H.264</li> <li>• Sub-Stream: H.265/H.264</li> </ul>                                                                                                                                                                                                                                                                                                      |
| H.264 Type                 | High Profile                                                                                                                                                                                                                                                                                                                                                                                                                       |


|                             |                                                                                                                                                                                                                                                                                                            |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| H.264+                      | Main Stream Supported                                                                                                                                                                                                                                                                                      |
| H.265 Type                  | Main Profile                                                                                                                                                                                                                                                                                               |
| H.265+                      | Main Stream Supported                                                                                                                                                                                                                                                                                      |
| Video Bit Rate              | <ul style="list-style-type: none"> <li>• Main Stream: 256 Kbps to 8 Mbps</li> <li>• Sub-Stream: 64 Kbps to 512 Kbps</li> </ul>                                                                                                                                                                             |
| <b>Image</b>                |                                                                                                                                                                                                                                                                                                            |
| Image Settings              | <ul style="list-style-type: none"> <li>• Mirror</li> <li>• Brightness</li> <li>• Contrast</li> <li>• Saturation</li> <li>• Sharpness</li> <li>• Exposure</li> <li>• WDR</li> <li>• White Balance</li> <li>• Prevent Overexposure to Infrared Light</li> <li>• HLC Adjustable by Client Software</li> </ul> |
| Image Enhancement           | BLC/3D DNR/HLC/SmartIR                                                                                                                                                                                                                                                                                     |
| Wide Dynamic Range          | 120dB<br><small>Note: When People &amp; Vehicle Analytics is enabled, only DWDR is supported.</small>                                                                                                                                                                                                      |
| SNR                         | ≥ 52 dB                                                                                                                                                                                                                                                                                                    |
| Image Parameters Switch     | Yes                                                                                                                                                                                                                                                                                                        |
| Privacy Mask                | Up to 4 Masks                                                                                                                                                                                                                                                                                              |
| ROI                         | 1 Region                                                                                                                                                                                                                                                                                                   |
| OSD Setting                 | Yes                                                                                                                                                                                                                                                                                                        |
| <b>Audio</b>                |                                                                                                                                                                                                                                                                                                            |
| Audio Communication         | Two-Way Audio                                                                                                                                                                                                                                                                                              |
| Audio Input                 | Yes                                                                                                                                                                                                                                                                                                        |
| Audio Output                | Yes                                                                                                                                                                                                                                                                                                        |
| Audio Compression           | Yes                                                                                                                                                                                                                                                                                                        |
| Audio Sampling Rate         | 8KHz                                                                                                                                                                                                                                                                                                       |
| Environment Noise Filtering | Yes                                                                                                                                                                                                                                                                                                        |
| Audio Bit Rate              | 64 Kbps (G.711 alaw)                                                                                                                                                                                                                                                                                       |

| Network                    |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Protocols                  | TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP, UDP, SSL/TLS, FTP/SFTP, RTP, IPv4, IPv6, ARP                                                                                                                                                                                                                                                                                                                    |
| ONVIF                      | Yes                                                                                                                                                                                                                                                                                                                                                                                                                         |
| API                        | Open Network Video Interface (Profile S/T/G)                                                                                                                                                                                                                                                                                                                                                                                |
| Simultaneous Live View     | 3 Main Streams & 3 Sub-Streams                                                                                                                                                                                                                                                                                                                                                                                              |
| Client                     | VIGI App, VIGI Security Manager, Web UI, VIGI VMS, VIGI Cloud VMS                                                                                                                                                                                                                                                                                                                                                           |
| Web Browser                | <ul style="list-style-type: none"> <li>• Google Chrome® 57 and above</li> <li>• Firefox® 52 and above</li> <li>• Safari® 11 and above</li> <li>• Microsoft® Edge 91 and above</li> </ul>                                                                                                                                                                                                                                    |
| Cloud                      | Yes                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Security                   | Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication                                                                                                                                                                                                                                                                                                                                             |
| Alarm and Event Management |                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Smart Event                | <ul style="list-style-type: none"> <li>• Intrusion Detection</li> <li>• Line-Crossing Detection</li> <li>• Region Entering Detection</li> <li>• Region Exiting Detection</li> <li>• Object Abandoned Detection</li> <li>• Object Removal Detection</li> <li>• Loitering Detection</li> <li>• People Detection</li> <li>• Vehicle Detection</li> <li>• Abnormal Sound Detection</li> <li>• Scene Change Detection</li> </ul> |
| Basic Event                | <ul style="list-style-type: none"> <li>• Motion detection(Enhanced with Human &amp; Vehicle Classification for more accurate alerts)</li> <li>• Camera Tampering</li> <li>• Exception (Illegal Login)</li> </ul>                                                                                                                                                                                                            |

|                               |                                                                                                                                                                              |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm Linkage                 | <ul style="list-style-type: none"> <li>• Memory Card Video Recording</li> <li>• Message Push</li> <li>• Audible Warning</li> <li>• White Light Flashing</li> </ul>           |
| Linkage Method                | N/A                                                                                                                                                                          |
| Output Notification           | Message Push                                                                                                                                                                 |
| <b>Deep Learning Function</b> |                                                                                                                                                                              |
| People & Vehicle Analytics    | Search and filter to people or vehicle of interest based on many different attributes, making post-event search faster and easier. <sup>†</sup>                              |
| <b>Interface</b>              |                                                                                                                                                                              |
| Network Interface             | 1 RJ45 10/100M Self-Adaptive Ethernet Port                                                                                                                                   |
| On-board Storage              | Built-In Memory Card Slot, Support MicroSD Card, up to 512 GB**                                                                                                              |
| Built-in Speaker              | Yes                                                                                                                                                                          |
| Built-in Microphone           | Yes; Records Anything Going on within a 15-ft Radius of the Camera                                                                                                           |
| Audio                         | N/A                                                                                                                                                                          |
| Alarm                         | N/A                                                                                                                                                                          |
| Reset Button                  | Yes                                                                                                                                                                          |
| Power                         | DC Power Port                                                                                                                                                                |
| <b>General</b>                |                                                                                                                                                                              |
| Operating Temperature         | -30–60 °C                                                                                                                                                                    |
| Storage Temperature           | -40–60 °C                                                                                                                                                                    |
| Operating Humidity            | 95% or Less (Non-Condensing)                                                                                                                                                 |
| Storage Humidity              | 95% or Less (Non-Condensing)                                                                                                                                                 |
| Package Contents              | <ul style="list-style-type: none"> <li>• VIGI Network Camera</li> <li>• Quick Start Guide</li> <li>• Waterproof Cable Attachments</li> <li>• Mounting Accessories</li> </ul> |
| Power Supply                  | <ul style="list-style-type: none"> <li>• 12V DC <math>\pm</math> 5%, Max. 11 W, 5.5 mm Coaxial Power Plug</li> <li>• PoE: 802.3af/at, class 0, Max. 12.3 W</li> </ul>        |
| Protection                    | IP67 Weatherproof, IK10 Vandal Proof                                                                                                                                         |

|                    |                                           |
|--------------------|-------------------------------------------|
| Material           | Metal                                     |
| Net Weight         | 0.62 Kg                                   |
| Product Dimensions | 4.80 × 4.80 × 3.50 in (122 × 122 × 89 mm) |
| Certifications     | CE, NTRA, FCC, VCCI, BSMI, ONVIF, KC      |

Build Features

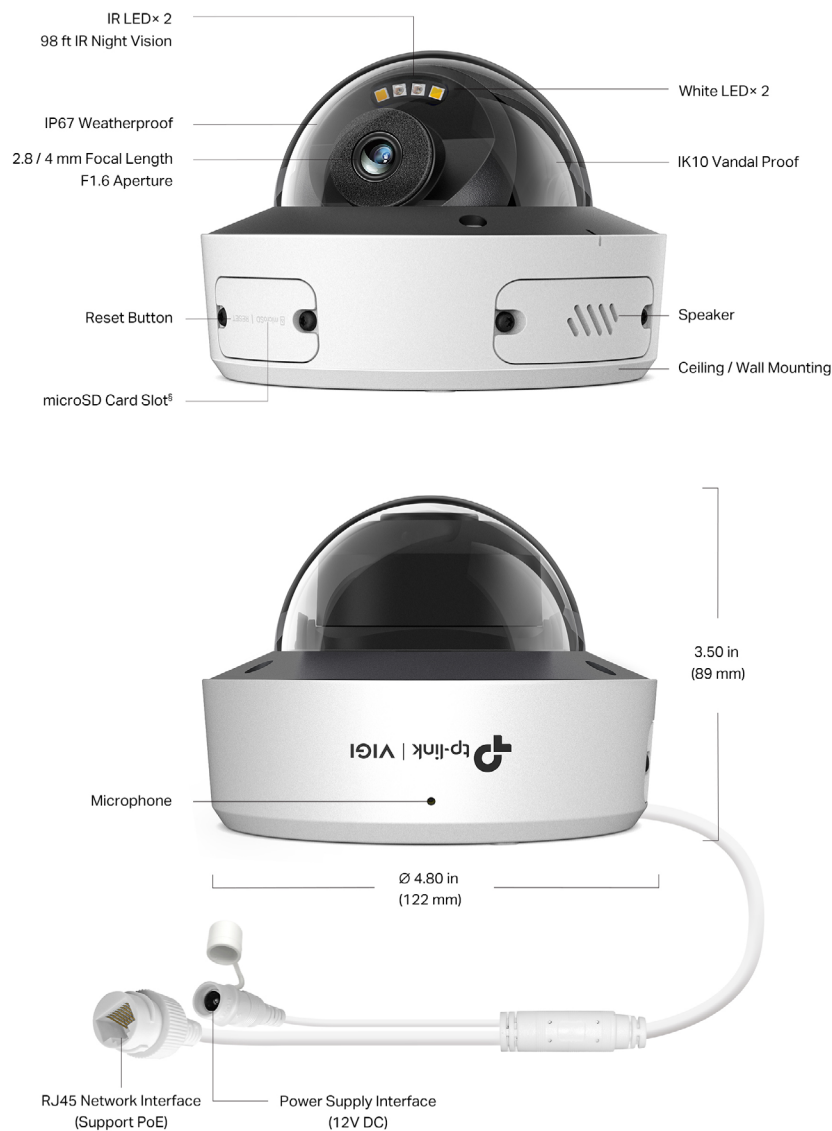

†The micro SD card is not included in the package.

†This function must be used with VIGI specified software.

△When People & Vehicle Analytics is enabled, only DWDR is supported.

\*Calculations based on laboratory testing using a 3MP VIGI camera, and an actual performance may vary according to the amount of activity recorded, resolution and other variables.

\*\*Micro SD card is not included in the package.

Specifications are subject to change without notice and can be found at [www.tp-link.com](http://www.tp-link.com).

©2024 TP-Link