

CCTV IP / LPR


SF-IPB585ZA-4LPR-0832V2

SF-IPB585ZA-4LPR-0832

H.265+ ECO Series

The ECO range is the entry level for IP cameras. It stands out for its good night-time performance and Matrix LED illumination system, as well as its characteristic robustness and reliability, which satisfy any standard installation. Efficient H.265+ encoding, which saves 80% in storage and bandwidth over H.264 codec. Power over the POE network cable greatly simplifies installation.

- IP Bullet Camera LPR range
- Resolution 4 Megapixel (2592x1520)
- Motorized Lens 8-32 mm | Audio | IR 100m
- License plate recognition / List management
- Waterproofing IP67 | PoE (IEEE802.3af) | Alarm

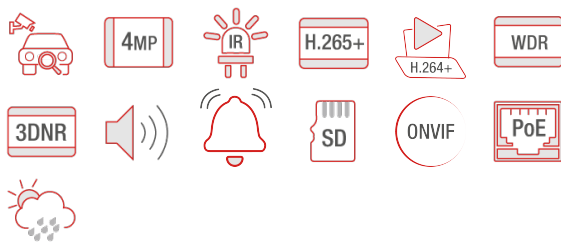

Technical Specification

Camera	
Image Sensor	1 / 1.8" CMOS
Image Size	2592 × 1520
Electronic Shutter	Manual or auto; manual: 1 / 1 s ~ 1 / 100000s
Iris Type	DC Iris
Min. Illumination	0.0007 lux@F1.3,AGC ON; 0 lux with IR 0.001 lux@F1.6, AGC ON; 0 lux with iR
Lens	8~32mm@F1.6, motorized
Field of View	Horizontal: 41°~15.5°; Vertical: 23°~ 9.5°; Diagonal: 46.5°~18°
Lens Mount	Integrated
Recommended ANPR Distance	7~30m
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
Digital NR	3D DNR
S/N Ratio	≥50dB
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°
Image	
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	4MP (2592 ×1520), 2K (2560 ×1440), 3MP(2304 ×1296),1080P(1920 ×1080), 720P (1280 ×720), D1, CIF
Main Stream	4MP/2K/3MP/1080P(60Hz :1 ~ 30fps; 50Hz : 1 ~ 25fps) HFR Mode: 1080P/720P (60Hz: 1~60fps; 50Hz: 1~50fps)
Sub Stream	720P/D1/CIF (60Hz :1 ~ 30fps; 50Hz : 1 ~ 25fps)
Third Stream	D1/CIF (60Hz :1 ~ 30fps; 50Hz : 1 ~ 25fps)
Bit Rate	64 Kbps ~ 8 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast,Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR,etc. adjustable through client software or web browser

ROI	Each ROI to be configured separately
Interfaces	
Network	RJ 45 10M/100M self-adaptive Ethernet port
Video Output	CVBS output (BNC× 1)
Audio	1CH audio input; 1CH audio output
Storage	Built-in micro SD card slot; up to 256GB
Reset	Yes
Alarm	1CH alarm input; 1CH alarm output
RS 485	Yes
Wiegand	Yes (26bit)
Functions	
Remote Monitoring	Web Browser/TVT NVMS2.0/NVR/mobile APP
Web Browser	IE11(plugin required)/Chrome 89.0+/Edge 89.0+/Firefox 87.0+/Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP,HTTP, HTTP POST,802.1x, UPnP, HTTPs, QoS
Interface Protocol	ONVIF
Interface Protocol	ONVIF
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection
Intelligent Analytics	License plate recognition, video exception detection
Security	Video encryption, firmware encryption, HTTPs encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/HTTPs
General Function	Watermark, video mask, heartbeat, corridor mode
PoE	Yes , IEEE802.3af
IR Distance	70~100m
Protection Grade	IP67
LPR	
Snapshot	Original image (4MP resolution) and license plate image
Vehicle Plate Database	10,000
License Plate Detectio & Recognition	Capture of vehicles with license plates and vehicles without license plate, Support plate exposure, travel direction recognition, plate character fault tolerance, plate comparison, snapshot time display Vehicle feature extraction: including vehicle color, plate color, vehicle type, vehicle brand/model, production year, etc.
Capture Speed Range	0~120km/h

Others

Power Supply	DC12V/AC24V/PoE
Power Consumption	< 12W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F); Humidity: less than 95 % (non-condensing)
Storage Environment	- 30 °C ~ 65 °C (-22°F~149°F); Humidity: less than 95 % (non-condensing)
Dimensions (mm)	278.3 × 100.2 × 88.7
Weight (net)	Approx. 1.176KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)