

CCTV IP / Professional IP cameras


SF-IPB585ZA-6I1-SL

SF-IPB585ZA-4I1

I1 Range: Advanced Artificial Intelligence and video metadata

The I1 series is the highest performing IP camera range in the Safire Smart ecosystem. This series integrates advanced and comprehensive artificial intelligence that achieves an accuracy rate of 99%, one of the highest in the industry. In addition, it includes functionalities such as facial capture or video metadata analysis for feature extraction (up to 13 human, 5 vehicle and 2 two-wheeled vehicle features). In this series, cameras with different resolutions (4MP and 8MP) are available with different features to adjust with the best functionalities to the needs and characteristics of each installation.

- Bullet IP camera range I1 AI Advanced
- Resolution 4 Megapixel (2592x1520)
- Motorized Lens 2.8-12 mm | Audio | IR 70m
- Advanced AI: Perimeter, Facial, Counting, Metadata
- Waterproofing IP67 | PoE (IEEE802.3af) | Alarm

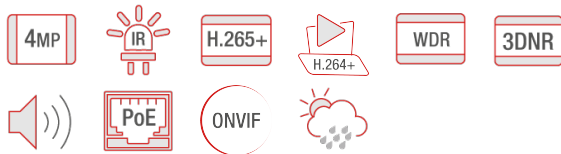

Technical Specification

Camera	
Image Sensor	1/2.5" Progressive Scan CMOS
Image Size	3296×1856
Electronic Shutter	1/3 s ~ 1/100000 s
Iris Type	DC Iris
Min. Illumination	0.005 lux (F1.6, AGC ON), 0 lux with IR
Lens	2.7~13.5mm@F1.6
Focus	Motorized
Lens Mount	ø14
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defog	Yes
S/N Ratio	≥50dB
Digital NR	3D DNR
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°
Image	
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Resolution	6MP (3296×1856),3K(3200×1800),4MP (2688×1520),2K (2560×1440), 1080P (1920×1080), 720P (1280×720), D1, VGA (640 ×480), 640 ×360, CIF, 480×240
Main Stream	6MP/3K/4MP/2K/1080P(60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Sub Stream	1080P/720P/D1/VGA/640×360/CIF/480×240(60Hz:1~30fps; 50Hz:1~25fps)
Third Stream	720P/D1/CIF/480×240 (60Hz : 1 ~ 30fps; 50Hz: 1~25fps)
Bit Rate	32 Kbps ~10 Mbps
Bit Rate Type	VBR / CBR
Audio Compression	G711A / U
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately

Interfaces

Network	RJ 45 10M/100M self-adaptive Ethernet port
Video Output	CVBS output (BNC × 1)
Audio	1CH audio input; 1CH audio output
Storage	Built-in micro SD card slot; up to 256GB
Reset	Yes
Alarm	1CH alarm input; 1CH alarm output

Functions

Remote Monitoring	Web Client/NVR/NVMS2.0/Mobile APP
Web Browser	Chrome 92.0+/Edge 92.0+/Firefox 91.0+/Safari 13.1+
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, RTMP, HTTP, 802.1x, UPnP, HTTPS, QoS
Interface Protocol	ONVIF Profile S/G/M/T
Storage	Network remote storage; micro SD card storage
Smart Alarm	Motion detection, SMD, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection, light alarm, audio alarm
General Function	Watermark, video mask, heartbeat, image distortion correction, smart IR, smart supplement light, system backup, corridor pattern, ANR, cloud upgrade, disarming
Security	Firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP/API service
PoE	Yes , IEEE802.3af
IR Distance	50 ~ 70 m 40 ~ 50 m
Ingress Protection	IP66 & IK10

Intelligent Analytics (Smart Events)

Perimeter Detection	Line crossing, region entrance/exiting/intrusion (human/motor vehicle/ non-motor vehicle classification)
Statistics	Target counting by line/area, heat map
Exception Detection	Scene change, video blur and abnormal color detection
Face Detection	Face detection and face capture
Video Metadata	Simultaneously captures human body, motor vehicle and non-motor vehicle and extracts 13 human features, 5 motor vehicle features and 1 non-motor vehicle feature
Other Events	Abandoned/missing object detection

DORI Distance

Detect	W: 69m(226ft) T: 204m(669ft)
---------------	------------------------------

Observe	W: 27m(90ft) T: 81m(266ft)
Recognize	W: 13m(45ft) T: 40m(133ft)
Identify	W: 6m(22ft) T: 20m(66ft)
Others	
Power Supply	DC12V/PoE
Power Consumption	< 12W
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	278.3 × 100.2 × 88.7
Weight (net)	Approx. 1.223KG
Installation	Ceiling mounting; wall mounting
Certificate	CE, FCC
Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)