


Tedee Dry Contact

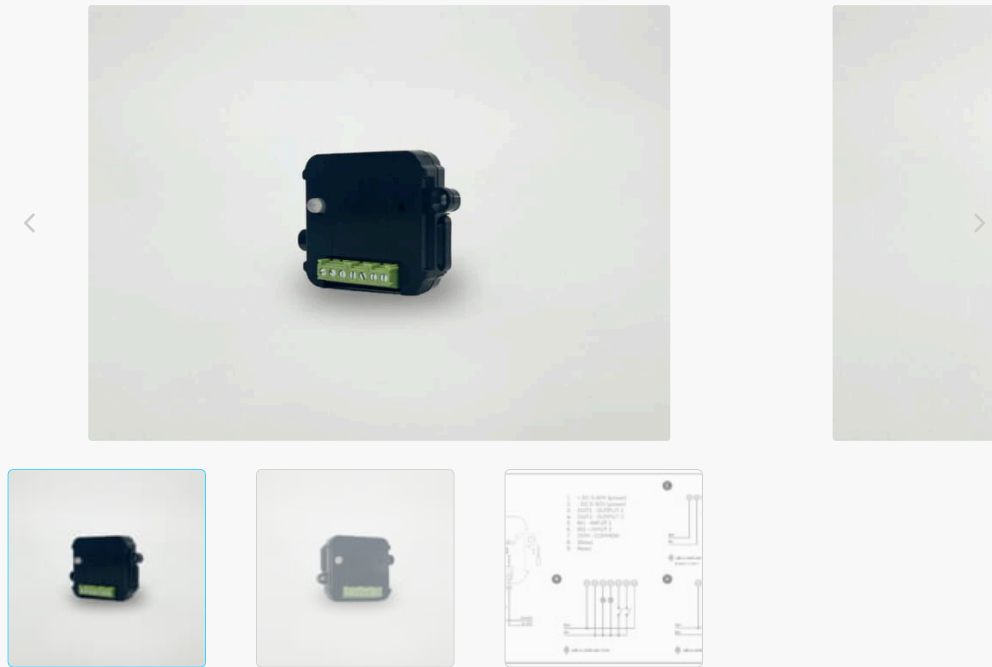

€79.00

Tax included
Free shipping

★ Trustpilot



TrustScore 4.5 848 reviews

Control your Tedee smart lock using wired electronic methods. Utilize Tedee Dry Contact to integrate Tedee GO and Tedee PRO with switches, alarms, wired legacy systems, and local smart home integrations— including KNX.

[Read the complete guide to Tedee Dry Contact >>](#)

This matchbox-sized unit can be wired into any compatible dry contact setup. Operating based on controller device outputs, Tedee Dry Contact facilitates locking and unlocking of Tedee GO or Tedee PRO via Bluetooth—without requiring a Tedee Bridge, internet connection, or API/SDK integration. Each device controls only one Tedee smart lock.

Tedee Dry Contact is intended for professional installation to ensure safety and compliance with electrical safety and compliance standards. Ensure the device is permanently installed, wired to the controller, and powered within the smart lock's Bluetooth range. Test the target location by unlocking a smart lock with the Tedee smartphone app via Bluetooth at the intended place.

Tedee Dry Contact operates with a power input of 5-60V DC voltage, ensuring compatibility with various power sources from power banks to permanent electrical connections.

Note: Never directly connect Tedee Dry Contact to the power outlet or the 230V/110V power supply.

Controlling a Tedee smart lock via Tedee Dry Contact replaces the typical Tedee cloud security system and digital authentication with an alternative, wired access method. Tedee is not responsible for the physical security of your installation or the protection of your devices against unauthorized access.

QUANTITY - 1 +

 ADD TO BASKET

Unlock more and buy also:

Tedee Keypad PRO (Black)

€129.00

[ADD TO CART >](#)

Dimensions	44.5 x 57.5 x 16 mm
Supply voltage	5-60V DC
Number of inputs	2
Input type	Normally Open
Number of outputs	2
Output type	Normally Open
Body material	PC+ABS
Bluetooth communication	BLE 5.2, 2.4GHz
Operating temperature	0-60°C
Operating humidity	0-90%
Compatible with Tedee devices	Tedee PRO, Tedee GO, Tedee Bridge
Box dimensions	130 x 70 x 23 mm

You may also like...

[BleBox relay module](#)

[Tedee Bridge European Set](#)

[Tedee Door Sensor \(White\)](#)

[I](#)

< >



E-mail: support@tedee.com. Phone: [+48 22 307 72 67](tel:+48223077267)

tedee

HOW IT WORKS

[Home](#)
[Short-term rental](#)
[Business](#)

SMART LOCK BLOG

[Can I use it?](#)
[What's new](#)
[10 smart lock doubts](#)

TEDEE PORTAL

LEGAL

COMPANY

[About us](#)
[Contact us](#)
[Become a partner](#)

TEDEE SHOP

STORE LOCATOR

RESOURCES

[Knowledge base](#)
[FAQ](#)
[API](#)
[FORUM](#)
[Status page](#)