

VX-200PS ER

POWER SUPPLY UNIT



The VX-200PS Power Supply Unit is mounted in the VX-2000PF Power Supply Frame when in use. There are 2 DC output channels per unit. Use the VX-200PS in the number suited to the required total system power.


Key features

- Power Supply Unit
- 2 DC output channels per unit
- EN 54-4 certified, Certificate No: 1134-CPR-083

Specifications


Power Source	230 V AC, 50/60 Hz
Power Consumption	580 W
DC Power Output	Rated output: 210 W (29 V, 7.25 A) x 2 Peak output: 400 W x 2 M4 screw terminal, distance between barriers: 11 mm (0.43") Applicable cable diameter: AWG 14 - AWG 10 (line resistance within 10 mΩ/pair) Cross sectional area: 2 - 5.5 mm ²
Ripple Voltage at I _{max} b (at VX-2000DS's DC Max. 4 V Output)	
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Finish	Surface-treated steel plate
Dimensions	135 (W) x 118.2 (H) x 324.8 (D) mm (5.31" x 4.54" x 12.79")
Weight	13.2 kg (29.1 lb)
Included Accessories	Fuse (T3.15A L) x 1, Power cable x 1
Compatible Frame	VX-2000PF

Dimensions

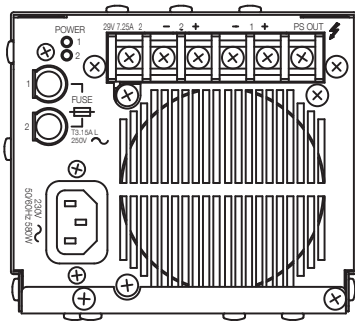


Rear View

Model	ER	UK
AC plug		

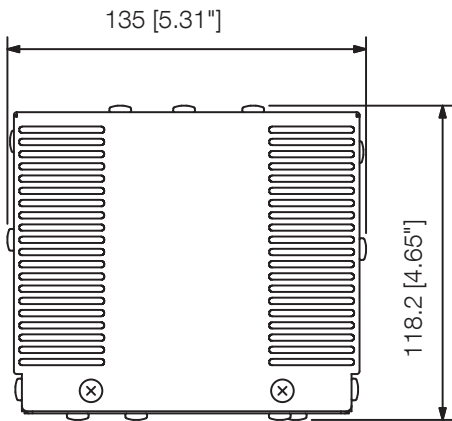

Front View

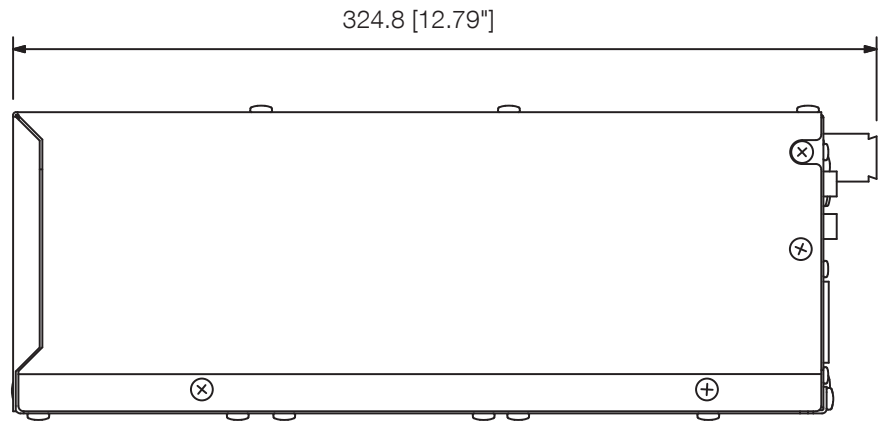

Side View

UNIT:mm SCALE:1/3

A&E specifications

Double power supply with temperature-controlled fan to the power of language alarm stations (SAZ).