

# DHI-NVR5432-16P-XI

32CH 1.5U 16POE 4HDDs WizMind Network Video Recorder



Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, IVSS, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

## Series Overview

As a new generation of network video recorders, the NVR5000-XI series offers advanced recording technology and has AI capabilities that make it ideal for IP video surveillance. It has a powerful processor, strong decoding capabilities and offers high incoming and outgoing bandwidth, allowing it to produce unimpeded streams and access videos as high as 32 MP. Through its deep learning modules and video metadata technology, it offers high-precision human face recognition, video metadata, perimeter protection and SMD plus technology. Together, these functions shorten the response time to events and provide critical information for surveillance personnel. AcuPick is an industry-leading, highly accurate search technology. When the NVR is put together with IP cameras that are compatible with AcuPick, it uses the features of the target to search for videos where the target appears. The NVR is compatible with many third-party devices, making it a great surveillance solution.

## Functions

### AcuPick

This industry-leading search technology effectively utilizes both front-end and back-end intelligence to help with searching through massive video data to quickly and conveniently locate targets with greater precision.

- Supports Smart H.265+, H.265, Smart H.264+, H.264 and MJPEG decoding formats.
- Max. decoding capability: 32 × 1080p@30 fps Max. 512/512/512 Mbps incoming/recording/outgoing bandwidth.
- Supports IP cameras with a resolution up to 32 MP.
- Supports AcuPick with up to 32 channels.
- AI by Recorder supports 8-channel face detection and recognition, up to 20 face databases and 200,000 face images; 8-channel metadata; 16-channel perimeter protection; 16-channel SMD Plus.
- AI by Camera supports face detection and recognition, perimeter protection, SMD Plus, metadata, ANPR, stereo analysis, heat map, and people counting.
- Supports iSCSI.
- Supports EPTZ, and one-click arming and disarming.



### Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

### Face Detection

Face detection is to detect if there is any human face appearing in the video. This technology adopts a deep learning algorithm to support face detection, tracking, optimization and capturing, and then output the best face snapshot.

### Video Metadata

With deep learning algorithm, Dahua Video Metadata technology can detect, track, capture vehicle, non-motor vehicle and people, and select the best images, and extract attributes.

### Heat Map by Camera

Dahua heat map technology is used to display the crowd density and people appearance probability. Export and display the crowd status by different colors. Generally, the crowd status is the statistics of people quantity in space and time dimensions.

### ANPR by Camera

With deep learning algorithm, Dahua ANPR technology can recognize the number plate information of vehicles in the image with ANPR

cameras. Support blacklist/allowlist mode, searching target vehicles from recorded video.

## SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

## Technical Specification

### System

|                     |                            |
|---------------------|----------------------------|
| Main Processor      | Industrial-grade processor |
| Operating System    | Embedded Linux             |
| Operating Interface | Web, Local GUI             |

### AI

|                                                          |                                                                                                                                                                                                                  |
|----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AI by Recorder                                           | Face detection; face recognition; video metadata (human, motor vehicles, and non-motor vehicles); perimeter protection; SMD                                                                                      |
| AI by Camera                                             | Face detection; face recognition; video metadata (human, motor vehicles, and non-motor vehicles); perimeter protection; SMD; stereo analysis; crowd distribution; people counting; ANPR; heat map; PPE detection |
| AcuPick Performance of AI by Camera (Number of Channels) | All channels (36 targets/s)                                                                                                                                                                                      |

### Perimeter Protection

|                                                            |                                            |
|------------------------------------------------------------|--------------------------------------------|
| Perimeter Performance AI by Recorder (Number of Channels)  | 24 channels, 10 IVS rules for each channel |
| Perimeter Performance of AI by Camera (Number of Channels) | All channels (32 targets/s)                |

### Face Detection

|                                                                   |                                                                                                                                                       |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Face Attributes                                                   | 6 attributes                                                                                                                                          |
| Face Detection Performance of AI by Recorder (Number of Channels) | Sub screen 4K enabled : 4 channels (up to 12 face images/s each channel)<br>Sub screen 4K disabled : 8 channels (up to 12 face images/s each channel) |
| Face Detection Performance of AI by Camera (Number of Channels)   | 32 channels                                                                                                                                           |

### Face Recognition

|                                                                     |                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Face Database Capacity                                              | Up to 20 face databases with 200,000 images, with a total capacity of 44 G.                                                                                                                                                                                                                                                                                                         |
| Face Recognition Performance of AI by Recorder (Number of Channels) | Sub screen 4K enabled:<br>32-channel FD (by camera) + FR (by recorder), image stream: 32 face images/s<br>4-channel FD (by recorder) + FR (by recorder), video stream: 16 face images/s<br>Sub screen 4K disabled:<br>32-channel FD (by camera) + FR (by recorder), image stream: 32 face images/s<br>8-channel FD (by recorder) + FR (by recorder), video stream: 16 face images/s |

|                                                                   |             |
|-------------------------------------------------------------------|-------------|
| Face Recognition Performance of AI by Camera (Number of Channels) | 32 channels |
|-------------------------------------------------------------------|-------------|

### SMD Plus

|                      |                                                                                                                                          |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| SMD Plus by Recorder | 32 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change |
| SMD by Camera        | All channels (64 targets/s)                                                                                                              |

### Video Metadata

|                                                             |                                       |
|-------------------------------------------------------------|---------------------------------------|
| Metadata Performance of AI by Recorder (Number of Channels) | 8 channels, 23 attributes extraction. |
| Metadata Performance of AI by Camera (Number of Channels)   | 32 channels                           |
| People Attributes                                           | 9 human body attributes               |
| Motor Vehicle Attributes                                    | 9 attributes                          |
| Non-motor Vehicle Attributes                                | 4 attributes                          |

### Vehicle License Plate Comparison

|                                     |                                                                     |
|-------------------------------------|---------------------------------------------------------------------|
| ANPR by Camera (Number of Channels) | All channels (32 targets/s)                                         |
| License Plate Database Capacity     | 1. Create up to 20,000 plate numbers.<br>2. Blocklist and allowlist |

### Audio and Video

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Access Channel            | 32 channels                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Network Bandwidth         | AI disabled: 512 Mbps incoming, 512 Mbps recording and 512 Mbps outgoing<br>AI enabled: 200 Mbps incoming, 200 Mbps recording and 200 Mbps outgoing                                                                                                                                                                                                                                                                                                                                             |
| Resolution                | 32 MP;24 MP;16 MP;12 MP;8 MP;6 MP;5 MP;4 MP;3 MP;1080p;720p;960p;D1;CIF;QCIF                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Decoding Capability       | AI disabled: 2-channel 32 MP@30 fps; 2-channel 24 MP@30 fps; 4-channel 16 MP@30 fps; 5-channel 12 MP@30 fps; 8-channel 8 MP@30 fps; 10-channel 6 MP@30 fps; 12-channel 5 MP@30 fps; 16-channel 4 MP@30 fps; 32-channel 1080p@30 fps<br>AI enabled: 1-channel 32 MP@30 fps; 1-channel 24 MP@30 fps; 2-channel 16 MP@30 fps; 4-channel 12 MP@30 fps; 6-channel 8 MP@30 fps; 8-channel 6 MP@30 fps; 8-channel 5 MP@30 fps; 12-channel 4 MP@30 fps; 24-channel 1080p@30 fps; 32-channel 720p@30 fps |
| Video Output              | 2 VGA, 2 HDMI<br>VGA:1920 × 1080, 1280 × 1024, 1280 × 720<br>HDMI:3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720<br>Heterogeneous video source output for HDMI1 and HDMI2<br>Simultaneous video source output for VGA1 and HDMI1<br>Simultaneous video source output for VGA2 and HDMI2                                                                                                                                                                                                      |
| Multi-screen Display      | Main screen: 1/4/8/9/16/25/36<br>Sub screen: 1/4/8/9/16                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Third-party Camera Access | ONVIF; Panasonic; Sony; Axis; Arecont; Pelco; Canon; Hanwha                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## Compression Standard

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Video Compression | Smart H.265+; H.265; Smart H.264+; H.264; MJPEG |
| Audio Compression | G.711a; G.711u; PCM; G726                       |

## Network

|                     |                                                                                                                                                                                                 |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network Protocol    | HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; SNMP; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVS, etc.); iSCSI |
| Mobile Phone Access | iOS; Android                                                                                                                                                                                    |
| Interoperability    | ONVIF 23.06(Profile T; Profile S; Profile G); CGI; SDK                                                                                                                                          |
| Browser             | Chrome; Firefox; IE                                                                                                                                                                             |

## Recording Playback

|                        |                                                                                  |
|------------------------|----------------------------------------------------------------------------------|
| Multi-channel Playback | Up to 16 channels                                                                |
| Record Mode            | General; motion detection; intelligent; alarm; POS                               |
| Backup Method          | USB device and network                                                           |
| Playback Mode          | Instant playback; general playback; event playback; tag playback; smart playback |

## Storage

|            |     |
|------------|-----|
| Disk Group | Yes |
|------------|-----|

## Alarm

|                   |                                                                                                                                                                                                                   |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General Alarm     | Motion detection; local alarm; alarm box; camera external alarm; network alarm; scene changing; PIR alarm; thermal alarm                                                                                          |
| Anomaly Alarm     | Error (no disk, disk error, low space, low quota space; abnormal disk health; network disconnection; IP conflict; MAC conflict; abnormal fan speed); video loss; video tampering; camera offline; audio detection |
| Intelligent Alarm | Face detection; face recognition; video metadata (human, motor vehicle, and non-motor vehicle); perimeter protection; license plate comparison                                                                    |
| Alarm Linkage     | Record; snapshot (panoramic); local alarm output; IPC external alarm output; audio; buzzer; log, preset; email                                                                                                    |

## Port

|                |                                                                                                              |
|----------------|--------------------------------------------------------------------------------------------------------------|
| Audio Input    | 1-channel RCA                                                                                                |
| Audio Output   | 2-channel RCA                                                                                                |
| Alarm Input    | 16 channels                                                                                                  |
| Alarm Output   | 6 channels (1-channel 12 V 1 A output )                                                                      |
| Disk Interface | 4 SATA ports. Each disk can contain up to 20 TB. This limit varies depending on the environment temperature. |
| eSATA          | 1                                                                                                            |
| RS-232         | 1                                                                                                            |
| RS-485         | 1 (half-duplex serial communication)                                                                         |
| USB            | 3 (1 front USB 2.0 port, 2 rear USB 3.0 ports)                                                               |
| HDMI           | 2                                                                                                            |
| VGA            | 2                                                                                                            |
| Network Port   | 1 (10/100/1000 Mbps Ethernet port, RJ-45)                                                                    |

|          |                                                                 |
|----------|-----------------------------------------------------------------|
| PoE Port | 16 ports, 10/100 Mbps, IEEE 802.3 af/at, 1-8 ports support ePoE |
|----------|-----------------------------------------------------------------|

## General

|                       |                                                                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power Supply          | 100–240 VAC, 50-60 Hz                                                                                                                                                            |
| Power Consumption     | <13 W (without HDD) Total output power of PoE is 200 W, the maximum output power of a single port is 25.5 W                                                                      |
| Net Weight            | 4.58 kg (10.10 lb)                                                                                                                                                               |
| Gross Weight          | 6.73 kg (14.84 lb)                                                                                                                                                               |
| Product Dimensions    | 440.0 mm × 414.6 mm × 76.0 mm (17.32" × 16.32" × 2.99") (W × D × H)                                                                                                              |
| Packaging Dimensions  | 529.0 mm × 499.0 mm × 211.0 mm (20.83" × 19.65" × 8.31") (W × D × H)                                                                                                             |
| Operating Temperature | –10 °C to +55 °C (+14 °F to +131 °F)                                                                                                                                             |
| Storage Temperature   | –20 °C to +60 °C (–4 °F to +140 °F)                                                                                                                                              |
| Operating Humidity    | 10%–93% (RH), non-condensing                                                                                                                                                     |
| Certifications        | Class A CE-EMC: EN 55032:2015+A1:2020; EN IEC 61000-3-2:2019+A1:2021; EN 61000-3-3:2013+A1:2019+A2:2021; EN 55035:2017+A11:2020; EN 50130-4:2011+A1:2014 CE-LVD: EN 62368-1:2014 |

## Ordering Information

| Type                   | Model                      | Description                                          |
|------------------------|----------------------------|------------------------------------------------------|
| NETWORK VIDEO RECORDER | DHI-NVR5432-16P-XI         | 32CH 1.5U 16POE 4HDDs WizMind Network Video Recorder |
| Accessories (Optional) | DHI-ARB1606                | Alarm Box                                            |
|                        | ESS1504C                   | 4 Bay eSATA Extension Cabinet                        |
|                        | DHI-RailBracket60/L-Shaped | Dahua Server Cabinet Rail Bracket                    |

## Accessories

Optional:



DHI-ARB1606  
Alarm Box




ESS1504C  
4 Bay eSATA Extension  
Cabinet



DHI-RailBracket60/L-  
Shaped  
Dahua Server Cabinet Rail  
Bracket

## Dimensions (mm[inch])

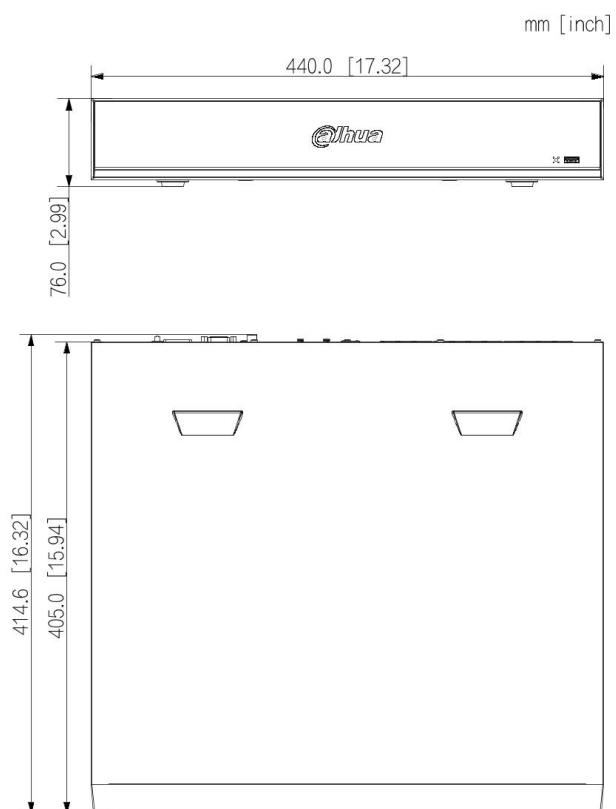

## Panels

