
2738W

2-BUTTON MINI DOOR-ENTRY PHONE, S2

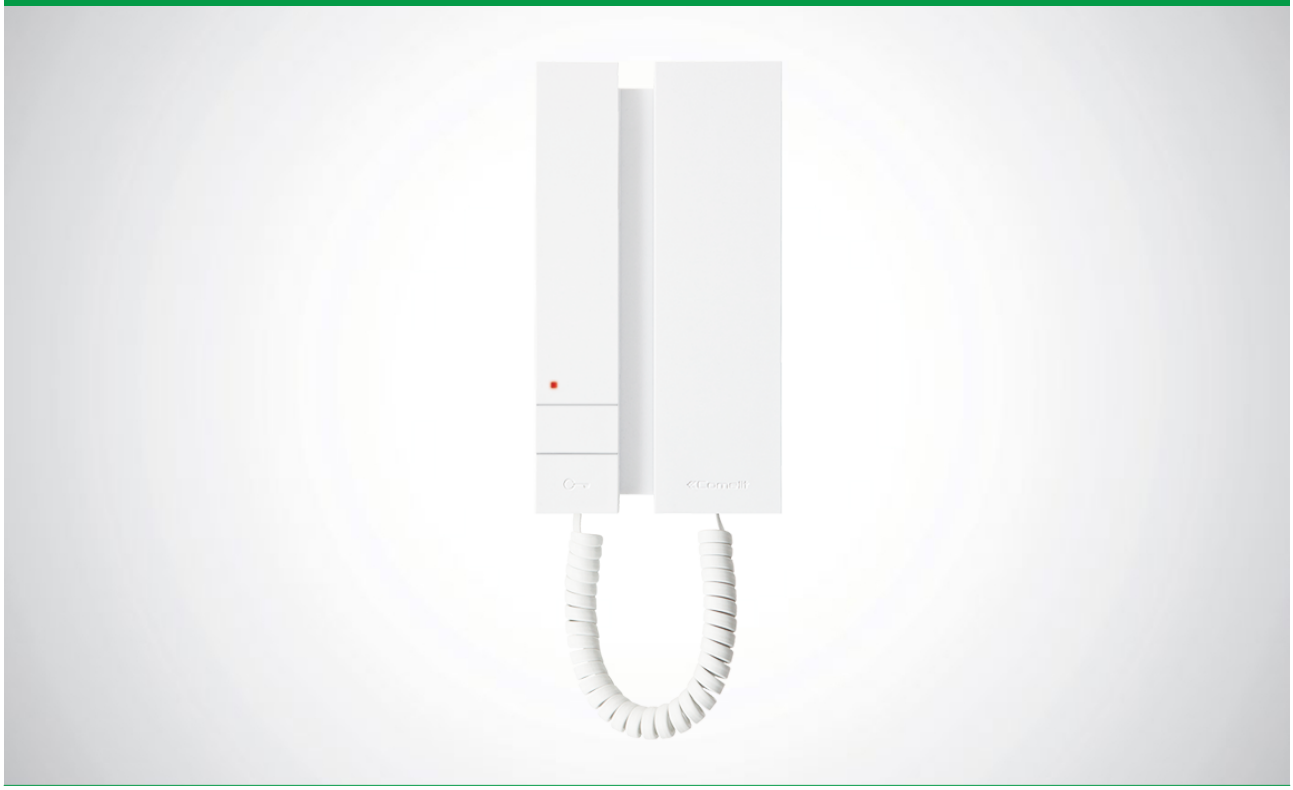

SB2

MINI series door-entry phone for Simplebus 2 system with electronic call, key button and additional button for extra services (switchboard call, actuator and generic uses). Call volume and privacy adjustment by means of 3-position selector. Privacy activation is indicated by a red light. Allows floor door call management. Complete with 8-position dip-switch for selection of the desired user code. Door-entry phone for use in mixed audio/video Simplebus 2 systems. Fitted with terminal art. 1214/2C. Dimensions: 105x191x28 mm

AWARDS

DESIGN MILANO

The technical specifications are subject to variations without warning.

2738W

2-BUTTON MINI DOOR-ENTRY PHONE, S2

MAIN FEATURES

Audio system:	Yes
Wall-mounted:	Yes
Desk base-mounted:	Yes
Color:	White
Total buttons:	2

FUNCTIONS

Actuator control function:	Yes
Switchboard call function:	Yes
Privacy function:	Yes
Floor door call function:	Yes
Electronic bell:	Yes
Key button function:	Yes

SETTINGS

Ringtone volume control:	Yes

GENERAL DATA

Height (inch):	7.48
Width (inch):	4.06
Depth (inch):	1.18

COMPATIBILITY

Simplebus 2 audio/video system:	Yes
Simplebus 2 audio system:	Yes
Kit audio/video system:	Yes

TECHNICAL CHARACTERISTICS

Power supply voltage (VDC):	22 ÷ 35
Absorption in stand-by (mA):	0.7
Absorption during call (mA):	30
Absorption during communication (mA):	30
Microphone:	4mm, omnidirectional
Loudspeaker:	0.50mm, 0.5W
Operating temperature (°F):	23 ÷ 104
Weight (oz):	0.57
Clamps:	L L CFP CFP

The technical specifications are subject to variations without warning.

2738W

2-BUTTON MINI DOOR-ENTRY PHONE, S2

The technical specifications are subject to variations without warning.

2738W

2-BUTTON MINI DOOR-ENTRY PHONE, S2

ACCESSORIES



2742W DESK BASE FOR MINI DOOR-ENTRY PHONE WITH HANDSET

Desk base for desktop conversion of MINI series door-entry phones. Complete with 1.5 m cable and connection coupling.

The technical specifications are subject to variations without warning.