


ROHS Compliant


408060

REVISIONS				
RevNo	Description	Date	Revision	Mender
1	SHELL MATERIAL:ZINC	2012/09/06	A2	CKQ
2	Change size ø3.0 to ø3.30,ø3.80 to ø4.10	2012/12/21	A3	CKQ
3	Change ferrule	2013/02/26	A4	CKQ

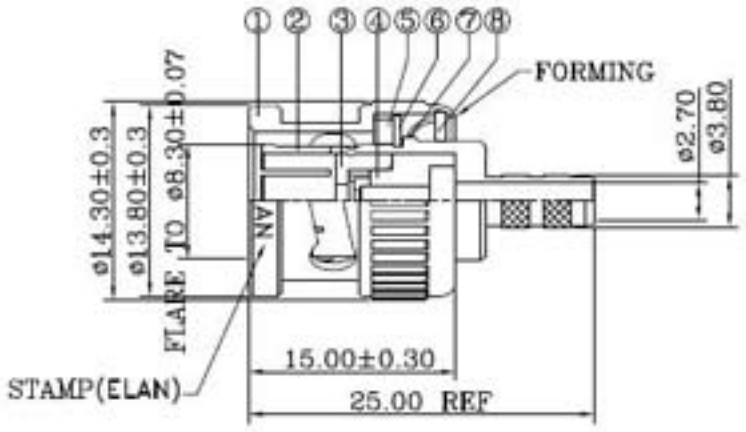





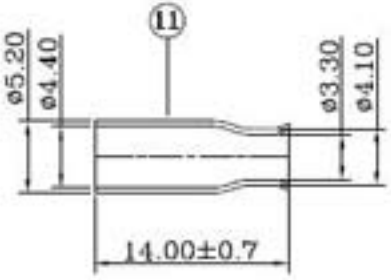


NOTES:FINISH (PLATING THICKNESS IN MICRO-INCHES)

1.BRASS PER QQ-B-626
2.NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
3.NICKEL PL.200 MIN. THICK OVER COPPER STRIKE
4.GOLD PL.3 MIN THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
5.JIS H 3250,C 2700

ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED
11	FERRULE	NOTE 5	1	NOTE 2
10	INSULATOR	POM	1	NATURAL
9	CONTACT PIN	NOTE 1	1	NOTE 4
8	WASHER	IRON	1	NOTE 2
7	SPRING	SK5	1	NOTE 3
6	RETAINER RING	65Mn	1	NOTE 2
5	GASKET	RUBBER	1	RED
4	INSULATOR	POM	1	NATURAL
3	INSULATOR	POM	1	NATURAL
2	BODY	NOTE 1	1	NOTE 2
1	SHELL	ZINC	1	NOTE 2

1.CRIMPED FERRULE
HEX CRIMP SIZE .178"

2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"



RECOMMENDED
CABLE STRIPPING DIM'S

"Merce non prodotta in UE" - "Goods are not produced in UE"

ELAN
CAVI E BATTERIE

www.elan.an.it

TITLE
BNC CRIMP PLUG 75 OHMS
(FOR Micro Coax ELAN)

		UNITS	MM
DRAWING NO.		SCALE	FIT
MODEL NO.			
PART NO.		EDITION	A1
CAD FILE			

UNLESS OTHERWISE SPECIFIED TOLERANCES:
0.5~6 = ±0.20
6~30 = ±0.40
30~120 = ±0.60
120~315 = ±1.00
315~1000 = ±1.6
1000~2000 = ±2.4
ANGLES ±5°

PUBLISH DATE
2012/06/18

DESIGNED	Ckq
DRAWING	Ckq
CHECKED	
APPROVED	

3RD ANGLE