Product data sheet

AACULP

Unidad de control para configurar cables sensor analógicos.

General

The AACULP is a PC programmable, Analogue Liner Heat Detection (LHD) cable control unit. It provides monitoring for any of the Alarmline II range of LHD sensor cable, configuration of alarm and pre-alarm temperatures as well as enabling simple interface to a main fire alarm or BMS system.

Interface & Programming

The AACULP provides LED indications only and requires a PC to configure the control unit.

Pre-Alarm and Alarm thresholds can be set through simple menu options with no need for any graphs or nomograms. Initial set-up is done by measuring and entering the calibration resistance of the sensor cable removing the need to know the sensor cable length.

Volt free changeover contacts are provided inside the control unit for Pre-Alarm and Alarm signaling to a main fire alarm control panel or BMS system. A failsafe opto-isolated phototransistor fault output is also provided.

No user controls are provided on the control unit. An isolated input is provided enabling remote reset functionality.

Operation

As well as monitoring the LHD sensor cable for changes in temperature, the control unit also monitors for open and short circuit faults along the cable ensuring notification if the cable becomes damaged.It is fitted with its own internal temperature monitor and should the temperature within the controller enclosure reach 100°C (212°F), an alarm will be signaled.

Each control unit may have up to 500m (1640ft) of LHD sensor cable connected to it, acting as a single detection zone. When the LHD sensor cable and the control unit are installed in different areas, a suitable interposing cable can be used to make the electrical connection between them.



Details

- UL521 and CE approval, UL/ULC listed
- Up to 500m of sensor cable per zone
- Separate pre-alarm and alarm signals
- Easy programmable interface
- Enclosure temperature alarm
- IP66 rated enclosure
- No nomograms or charts required

AACULP

Unidad de control para configurar cables sensor analógicos.

Technical specifications

Electrical

Voltaje de funcionamiento	20 to 28 VDC
Consumo de corriente	<40 mA

Detection

Ambient Temperature up to 30°C	Alarm Temperature - 54°C
Ambient Temperature up to 47°C	Alarm Temperatures - 64°C / 72°C / 79°C
Ambient Temperature up to 69°C	Alarm Temperatures - 86°C / 100°C

Physical

Dimensiones físicas	182 x 180 x 90 mm (7 1/8"□ x 7 1/8" x 3 1/2"□) (W x H x D)
Peso neto	735 g
Color	Gris claro
Material	Policarbonato

Environmental

Temperatura de funcionamiento	0 to +50°C
Humedad relativa	0 to 95% max. noncondensing, 75% for <75 m cable & 54°C alarm setting
Entorno	Interior, Exterior
Clasificación IP	IP66
Operating temperature (max)	0 to +50°C
Relative humidity	0% to 95% (Max 75% RH for <75m cable & 54°C alarm setting)
IP rating	IP66
IK rating	IK08

Standards & regulation

Certificación	CE, UL

Operating voltage

	20 – 28VDC

Current consumption

Quiescent	<40mA
Fault	<40mA
Pre-Alarm	<50mA
Alarm	<50mA
Pre-alarm & alarm	<70mA

Outputs

Pre-Alarm (Form C relay resistive load)	2A @ 30VDC / 0.25A @ 250VAC (62.5VA)
Alarm (Form C relay resistive load)	2A @ 30VDC / 0.25A @ 250VAC (62.5VA)
Fault (Opto-isolated phototransistor output) Max.	50V @ 20mA

Inputs


Remote reset (isolated) 5s pulse	20-28VDC

Zone length

	30.5m to 500m (100ft to 1640ft)

Mechanical

Material	Polycarbonate
Colour	Light grey
Weight	735g
Dimensions (W x H x D)	182 x 180 x 90mm (7 1/8” x 7 1/8” x 3 1/2”)

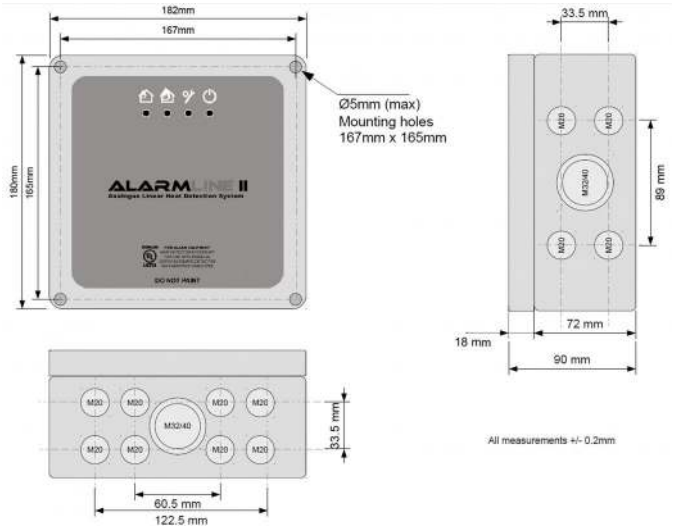

Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 23 July 2021 - 10:03