FAST 02 2C PRO PLUS

Fogging system with
DOUBLE CYLINDER
PATENTED TECHNOLOGY



Weight of the fogging machine	around 18 Kg
Weight with packaging	around 20 Kg
Units on one pallet (100×120 cm)	24
Dimension of the machine	L 27,0 x W 21,5 x H 43,5 cm
Dimension of the packaging	L 37,0 x W 25,0 x H 47,0 cm
Color	white
Working time without mains power	around 2 hours
Heating time from cold	around 90 minutes
Vertical mounting	yes
Horizontal mounting	yes
Usb port for computer monitoring	yes
Nozzle tamper	yes
Serial interface RS232 with UR FOG Standard protocol	yes
Lan Connection : Active Cloud	optional

Fog emission and saturation:

up to 1200 m³ in 25 seconds
(400 m³ visibility less than 1 m)


The ideal fogging system to protect medium areas like large shops, homes, and generally all professional applications where top security technology is needed.
It is very fast and competitive.

It is arranged to an easy wall installation and it has a lower compartment to equip boards or accessories if needed.

New heating system "Layer"	yes
Coverage in a single shot (visibility more than 1,5 m)	up to 1200 m³
Coverage in a single shot (visibility less than 1 m)	up to 400 m³
Max seconds of fog emission	25 sec
Max fog emitted with full fog tank	2000 m³
Number of cylinders	2
Fog tank capacity	2 x 600 ml
Shooting specification	programmable in seconds
Cylinder model	vertical / horizontal
Cylinder included	2

ELECTRICAL SPECIFICATIONS

Mains power	230 V or 120 V
Average power consumption	42 W
2 Ah 12V back up battery (not included)	yes
Optional demo / antirobbery kit	yes
Inputs wired arming and shooting	yes
Outputs wired	yes
Standard communication protocol	yes

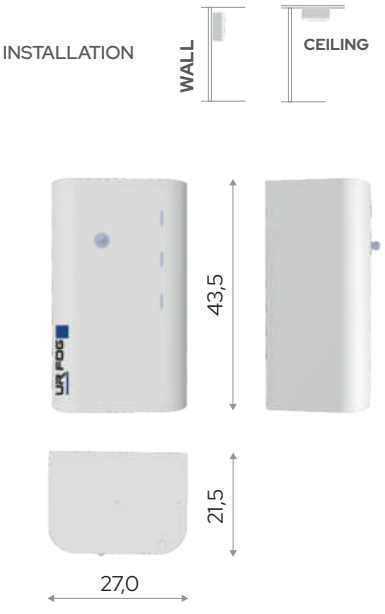

FOG FLUID CERTIFIED

Complies with european CE

Meets EUROPEAN Standard

UR FOG S.r.l. Via Toscana 38 - 10099 San Mauro T.se (Torino) - Italy - Phone: +39 011 0133037 **sales1@urfog.com | support@urfog.com | www.urfog.com**