
Marine SCI Sensor Mounting Base

Features

- Electronics free
- Stainless steel contacts
- Takes 2.5mm² cables
- Slim profile - only 8 mm
- Rugged wiring contacts
- Facility for remote indicator
- Quick connection via square cable clamps
- Also available in white
- Fourth terminal allows for SCI functionality of sensors
- Also available in white.

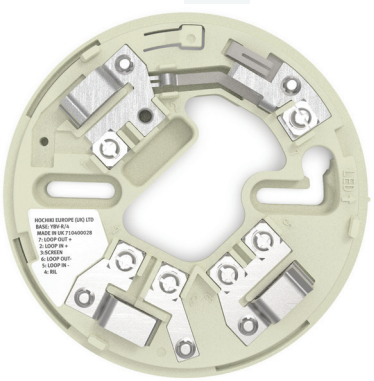

Description

Model YBV-R/4 is a Marine SCI Sensor Mounting Base, which is fully compatible with Hochiki's ESP range of SCI sensors. It is supplied with square cable clamps for secure and reliable cable termination and is also capable of driving a remote LED if required.

Please note, this base does not provide short-circuit isolation on its own, but allows the SCI sensor range to operate with SCI functionality.

Specification

Ordering codes	YBV-R/4M - Ivory / YBV-R/4M(WHT) - White
Operating temperature range	-10 °C to +50 °C
Storage temperature range	-30 °C to + 70 °C
Maximum humidity	95% RH - Non Condensing (at 40 °C)
Colour / Material	Ivory or White / ABS
Weight (g) / Diameter (mm) / Height (mm)	50 / 100 / 8
Fixing centres (mm)	48 ~ 74
Maximum wire thickness	2.5 mm² Cables

For further information visit our website.
Hochiki reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki to be a complete and up-to-date description. Check online for current version.