
Conventional Marine Approved Manual Call Point

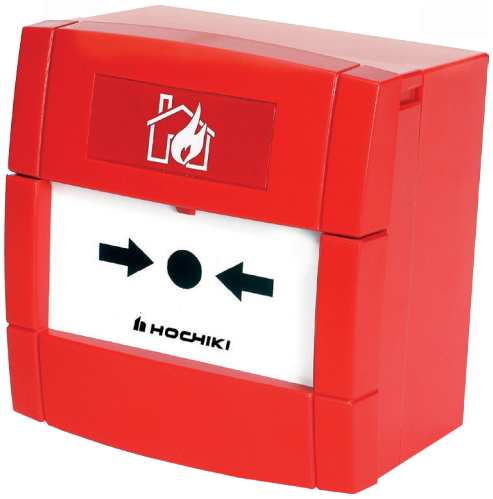

Features

- Complies with EN54-11
- Push-fit terminals can accommodate up to a 2.5mm2 solid conductor
- Unique 'Plug & Play' installation concept
- Re-settable operating element option
- Resistive and clean contact connections
- Semi-flush or surface mounting
- Backward compatibility
- Other colours available
- Approved by GL

Description

The MCP1A is a Conventional Marine Approved call-point based upon the industry standard KAC world series housing and features easy to install, push-fit wiring terminals. The unit features a 'Non Frangible Plastic' element.

Specification

Nominal operating resistance	470Ω
Maximum contact resistance (R)	200Ω
Ingress Protection Rating	IP24
Operating Temperature Range	-25°C to + 70°C
Storage Temperature Range	-30°C to + 70°C
Maximum Humidity	95%RH - Non condensing (at 40°C)
Colour / Case Material	Red / ABS
Weight (g) / Dimensions (mm)	(Flush Mount) 110 / W89 x H93 x D27.5
	(Surface Mount with Back Box) 161 / W89 x H93 x D59.5
Approvals	DNV-GL

Ordering Codes

Product	Part Number
Conventional Marine Approved Manual Call Point	MCP1A
Non-Frangible Element	KAC/EWS/HE

Approvals

thout notice.
ent it is not