


8-Port Industrial Gigabit DIN-Rail Mini Switch

TI-GLC80 (V2)

- 8 x Gigabit ports
- Hardened IP50 rated metal mini switch
- Extreme operating temperature range of -40° – 75°C (-40° – 167°F)
- 16Gbps switching capacity
- Includes DIN-Rail mount and wall mount brackets
- Power supply sold separately (model: TI-M6024)
- NDAA / TAA compliant (U.S. and Canada only)

TRENDnet's 8-Port Industrial Gigabit DIN-Rail Mini Switch, model TI-GLC80, is a reliable and rugged networking solution that is designed for use in both extreme and demanding environments. This compact industrial switch features a rugged IP50 rated metal enclosure, and is designed to withstand a high degree of vibration and shock, while operating in both high and low temperatures for industrial environments within -40° – 75° C (-40° – 167° F). The hardened industrial mini switch features eight copper Gigabit ports for high-speed device connections. The mini-sized housing is designed to fit into most compact installation areas.

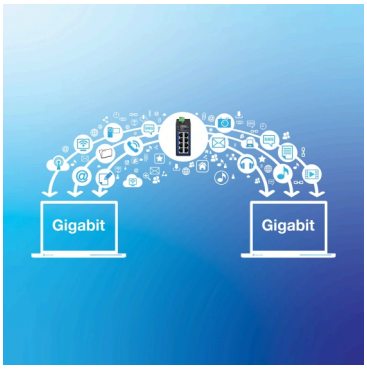

Gigabit Ports

This compact industrial switch features eight copper gigabit ports for high-speed device connections.



Industrial Hardened Design

Equipped with a rugged IP50 rated housing, designed to withstand a high degree of vibration and shock, and operate within an extreme temperature range of -40° – 75° C (-40° – 167° F).



Compact Design

With a compact metal housing design, this mini network switch is well-suited for installations into most environments. Its fanless design is perfect for quiet environments that require silent operation.

FEATURES

Gigabit Ports
This small industrial switch is equipped with eight gigabit Ethernet ports

DIN-Rail / Wall Mounts
IP50 rated metal enclosure on the compact industrial switch, with included DIN-Rail mount and wall mount hardware

Mini Housing Design
Compact and sturdy metal housing

Jumbo Frame
Supports larger packets, or Jumbo Frames (up to 9KB), for increased performance


Operating Temperature Range
Operating temperature range of -40° – 75° C (-40° – 167° F) allows for the installations of the compact industrial switch in environments with extreme hot or cold conditions


Shock and Vibration Resistant
Rated for shock (EN 60068-2-27), freefall (EN 60068-2-32), and vibration (EN 60068-2-6)

Electro Magnetic Compliance
Complies with industrial EMS certifications (IEC 61000-4-2) ESD: Contact: 6kV | Air: 8kV, (IEC 61000-4-4) EFT: Power: 2kV | Signal: 2kV, (61000-4-5) Surge:
Power: 2kV | Signal: 2kV

Grounding Point
The compact industrial switch features a grounding point for protection against external electrical surges

NETWORKING SOLUTION

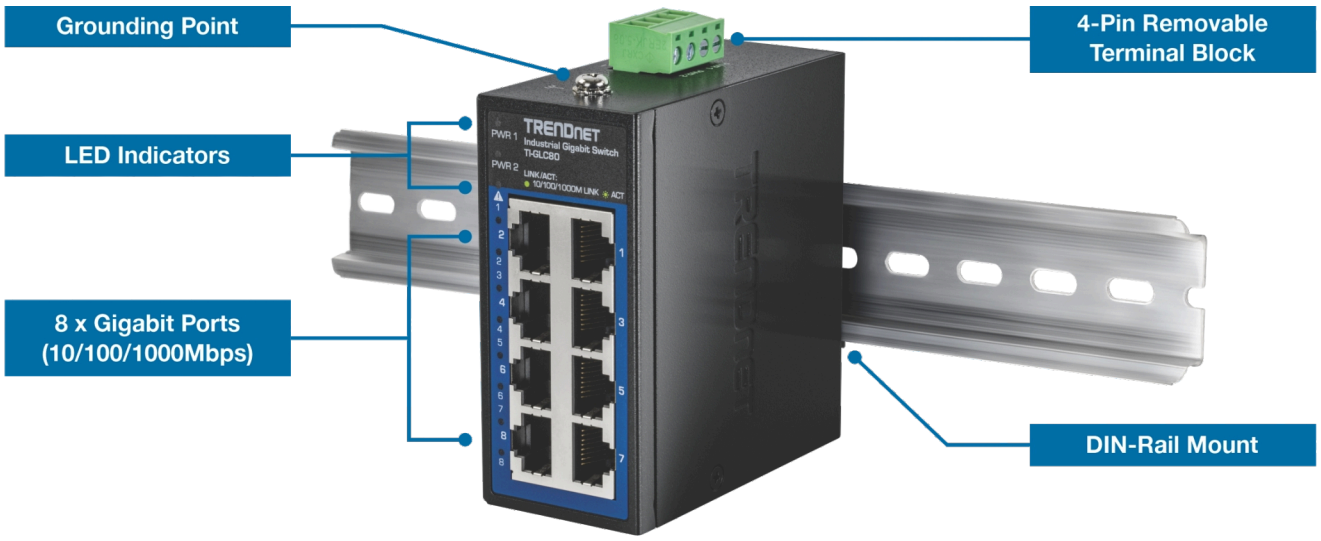

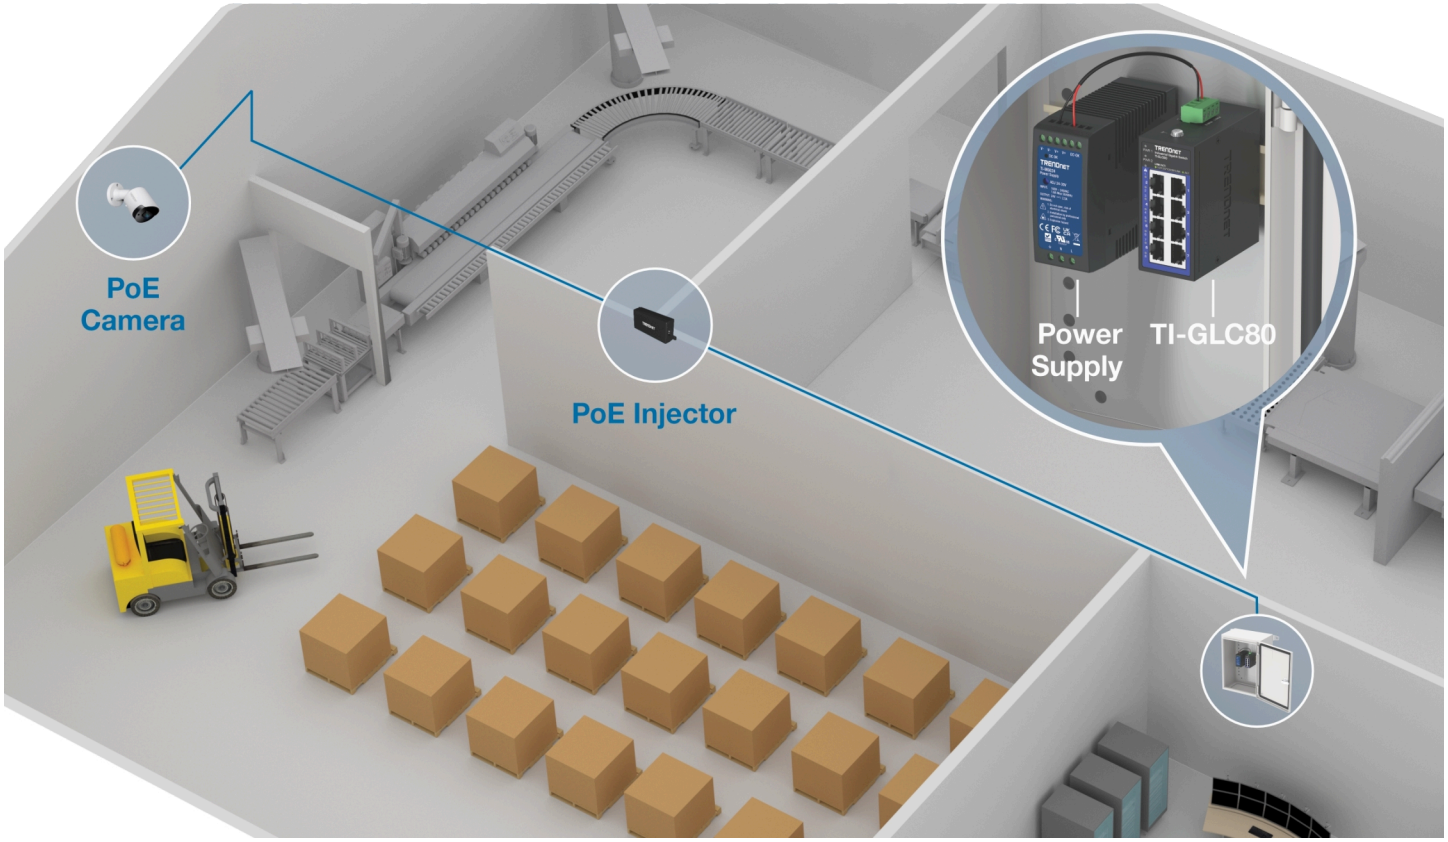

SPECIFICATIONS

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.3x

Device Interface

- 8 x Gigabit ports (10/100/1000Mbps)
- 4-pin removable terminal block
- LED indicators

Performance

- Data RAM Buffer: 192KB
- Switching Fabric: 16Gbps
- MAC Address Table: 4K entries
- Jumbo Frame: 9KB
- Forwarding rate: 11.9Mpps (64-byte packet size)

Special Features

- Hardened components rated for extreme temperatures
- VLAN Passthrough

Power

- Input: 9 – 60V DC
- Compatible power supply: TI-M6024 (sold separately)
- Max. consumption: 4.72W @ 60V

Terminal Block

- 4-pin terminal block
- Wire range: 1.5mm^2
- Solid wire (AWG): 12-28
- Stranded wire (AWG): 12-28
- Torque: 3 lb. – In / 0.2Nm / 0.56Nm
- Wire strip length: 6-7mm

MTBF

- 2,300,000 hours @ 25° C

Housing

- IP50 metal case
- DIN-Rail mount
- Wall mount
- Grounding point
- ESD 6KV protection

Operating Temperature

- - 40° - 75° C (-40° - 167° F)

Operating Humidity

- Max. 95% non-condensing

Dimensions

- 85 x 80 x 39mm (3.34 x 3.14 x 1.53 in.)

Weight

- 352g (12.41 oz.)

Certifications

- CE
- FCC
- Shock (EN 60068-2-27)
- Freefall (EN 60068-2-31)
- Vibration (EN 60068-2-6)
- ESD 6kV
- EFT 6kV
- Surge 6kV

Warranty

- 2 Years

Package Contents

- TI-GLC80
- Quick Installation Guide
- Removable terminal block
- DIN-Rail and wall mount kit

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

20675 Manhattan Place • Torrance • CA 90501 • USA • T: 1-888-326-6061 • sales@trendnet.com • www.TRENDnet.com

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit http://www.trendnet.com. Copyright © TRENDnet. All Rights Reserved.

Updated: 8/20/2025