
CE EN 54-24

PREVIDIA | ULTRA

DA-P 10-260/T-EN54

10W WALL OR CEILING MOUNT TWO-WAY LOUDSPEAKER

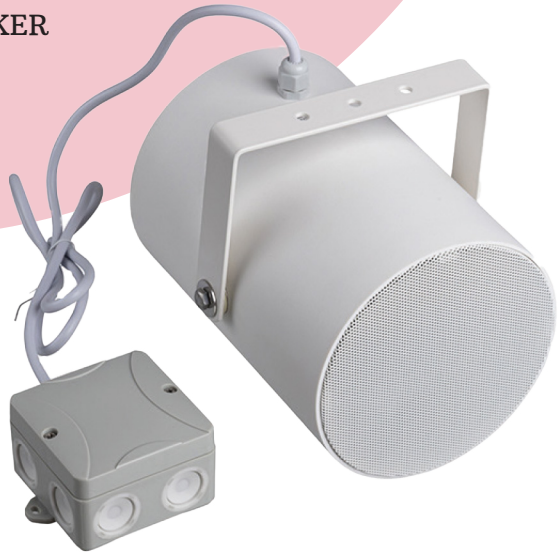

The DA-P 10-260/T-EN54 loudspeaker for voice evacuation systems is an EN54-24 certified 10W two-way loudspeaker. Suitable for outdoor installations, the acoustic projector reproduces voice announcements and background music with optimum sound quality.
Installation is made easy by a bracket for the adjustment of the device angle.
EN54-24 certified.

TECHNICAL SPECIFICATIONS

Main features

- 5” speaker
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall or ceiling mount
- Internal selector to adjust the output power to 10 / 5 / 2.5 W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified


Electrical specifications

Power (PHC)	10 / 5 / 2.5 W (internal selector)
SPL (Sound Pressure Level)	
Frequency response	100 Hz – 20.000 KHz (-10 dB)
Operating voltage	70 – 100 Vrms


Mechanical specifications

IP protection grade	56
Enclosure material	ABS
Dimensions	Ø 146 x 202 mm
Weight	1.82 Kg
Colour	White RAL 9010
Mounting type	Wall, ceiling

Dimensions

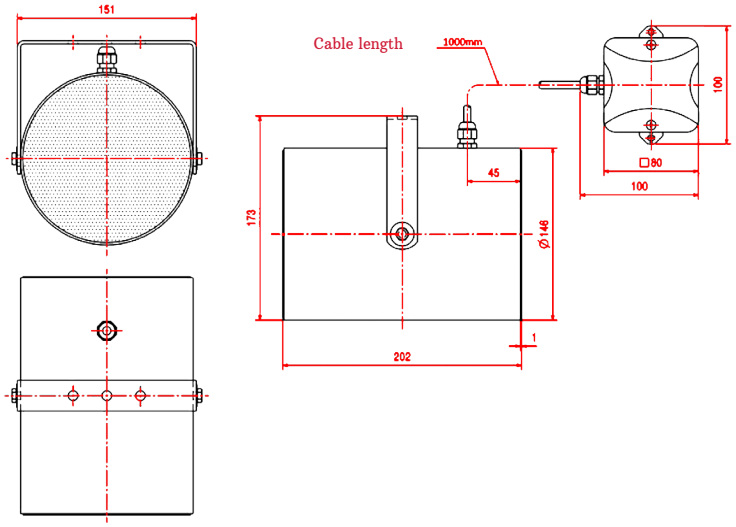

Diagrams

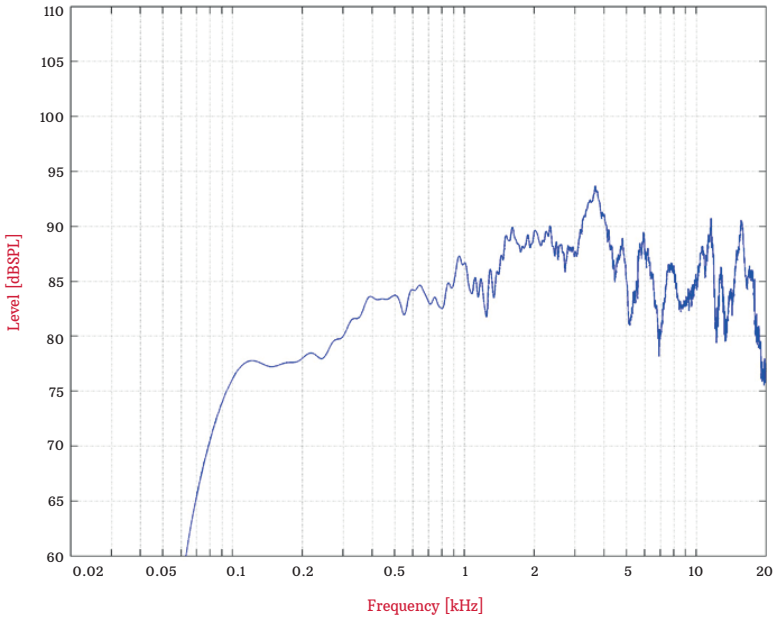

ORDER CODE

DA-P 10-260/T-EN54 10W wall or ceiling mount two-way loudspeaker, certified EN54-24

Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

Inim distributor's stamp
and signature