CE EN 54-24

PREVIDIA | ULTRA

DAD 260/10 PP

5” 10W TWO-WAY SPEAKER FOR WALL OR CEILING MOUNT

The DAD 260/10 PP loudspeaker for voice evacuation systems is a 10W two-way loudspeaker suitable for indoor installation in places such as lobbies and corridors.
Its powder-paint coated aluminum enclosure guarantees high resistance to corrosion.
Installation is made easy by a bracket for the adjustment of the device angle.
EN54-24 certified.



TECHNICAL SPECIFICATIONS

Main features

- Two 5” speakers
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall or ceiling mount
- Internal selector to adjust the output power to 1.5 /3 / 6/ 10 W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified


Electrical specifications

Power (PHC)	1.5 / 3 / 6 / 10 W (internal selector)
SPL (Sound Pressure Level)	85 dB (1W @ 1m)
Frequency response	145 Hz – 15.9 KHz (-10 dB)
Operating voltage	70 – 100 Vrms

Mechanical specifications

IP protection grade	21
Enclosure material	Aluminium
Dimensions	Ø 140 x 165 mm
Weight	2.4 Kg
Colour	White RAL 9010
Mounting type	Wall, ceiling

Dimensions

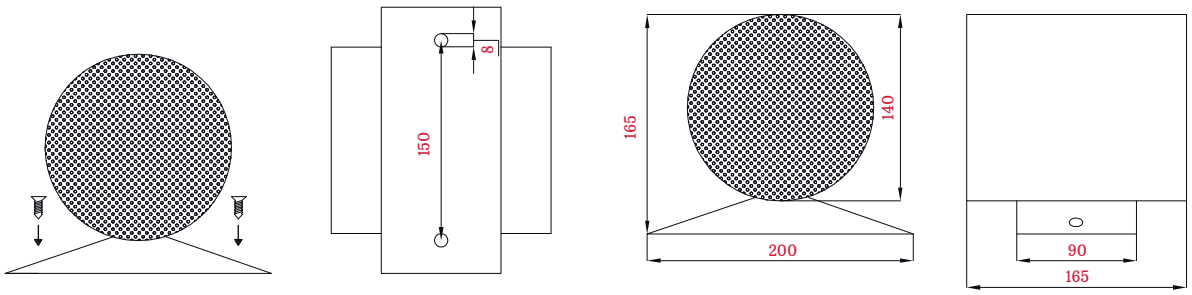

ORDER CODE

DAD 260/10 PP 5” 10W wall or ceiling mount two-way loudspeaker

Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

info@inim.biz _ www.inim.biz

Inim distributor’s stamp
and signature