ASR1101A ASR1101A-D

RFID Reader



Features


- Support RS485, Wiegand34 protocol(Wiegand 26 optional)
- 13.56MHz(Mifare)
- 125KHz(EM-ID)
- Red and Green LEDs
- Sensitive touch keypad with blue backlight
- Watch dog function ensure device free from halting
- Beep Buzzer and LED indicator
- Surface mounted installation




Technical Specification

Mode	ASR1101A	ASR1101A-D
System		
Main Processor	8 Bit	
Read		
Read Format	13.56MHz	125KHz
Read Range	1cm–4cm (max.)	
Reading time	<0.1s	
Function		
Tamper Alarm	Yes	
Interface		
To Controller	RS485, Wiegand34 (Wiegand 26 optional)	
General		
Keypad	12Keys (0-9,*,#)	
Sensitive touch keypad	Blue backlight	
Beep Tone	Buzzer	
Power Supply	9V–15V DC/100mA	
Operating Temperature	-30°C to +60°C	
Working Humidity	≤95%	
Dimension(W×D×H)	87mm×13mm×136mm	
Weight	0.25kg	
Working Environment	Indoor	
Certificates		
CE	Yes	
FCC	Yes	

Dimensions

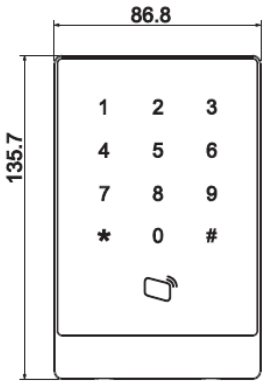

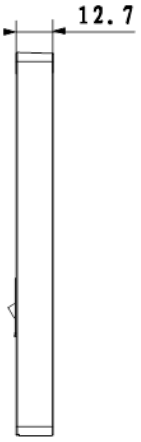

Rev 001.001
© 2019 Dahua . All rights reserved. Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.