MINI-SA2

STANDALONE EM RFID READER




FEATURES


- Input Voltage:	12-24 VDC; 15-24 VAC;
- Current consumption:	60 mA at 12 VDC; 30 mA at 24 VDC
- Output:	1 relay (0.5A/125 VAC; 1A/30 VDC) Latch or Pulse mode (01 to 250 seconds)
- Read Range:	up to 8cm
- Users:	4000
- Exit Button Input:	Yes
- Programming cards:	1 Master Card and 1 Delete Card
- Visible LED Signal:	3 LEDs
- Audible Signal:	One internal Buzzer
- Operating Temperature:	-20ºC to 50ºC
- Protection Standard:	IP66
- Resin potted electronics:	Yes
- Dipswitch:	For enrollment of Master and Delete Card
- Tamper switch:	For higher security
- Dimension (mm):	90L x 51W x 17H
- Cable length:	50 cm

ENROL A USER

INPUT	INDICATION
1. Present ***Master Card***	short + long beep
2. Present ***Shadow Card***	short + 3 short beeps
3. Present ***User Card*** (or multiple User Cards)	OK beep
4. Present ***Master Card***	short + 5 short beeps

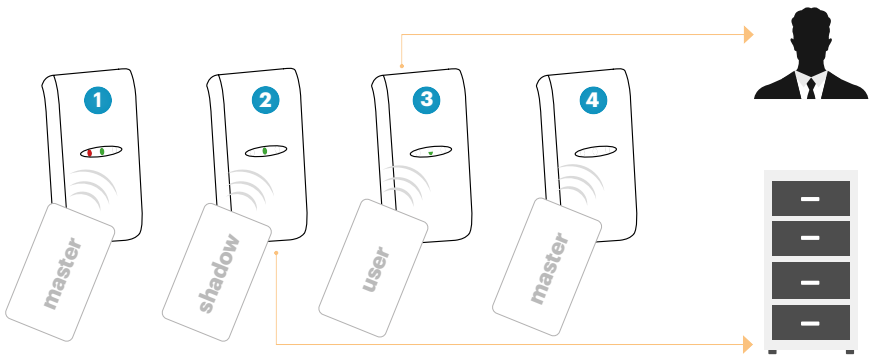

DIMENSIONS

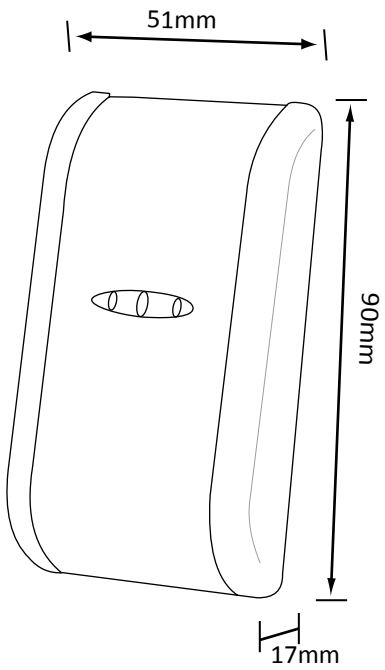

ACCESSORIES

Fobs & Cards



Ref.	PBX-1E	PBX-1C	PBX-2	PBX-2C
Features	ABS Keyfob EM4100	Leather Keyfob EM4100	0,75mm ISO Card - EM4100	2mm NISO Card - EM4100

All product specifications are subject to change without notice.