


- Thermoplastic self-extinguishing frame
- Power supply 12/24 Vdc
- Steady or flashing light
- High sound power buzzer
- LED backlighting

Series 5000

Housing material	Self-extinguishing white thermoplastic (hot wire 850°C)
Buzzer material	Self-extinguishing polycarbonate, transparent
Type of connection	Terminals
Operating temperature	-10°C to +50°C
Protection rating	IP40
Buzzer characteristics	- 0,25 s OFF

Dimensions

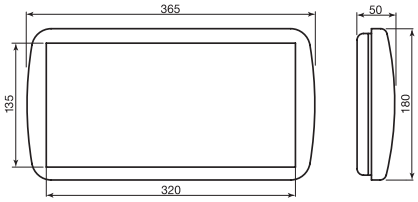

Series 5000

IP40 optical/acoustic panel

Optical/acoustic sign boards, suitable for all types of risk conditions such as fire, flooding, gas leaks, etc., whenever visual and acoustic information are needed.

The notably elegant and pleasing design is suited to installations in hotels, shops, shopping centres, cinemas. 5000 series alarm panels are available with a high visibility LED lighting system and high sound pressure buzzers.

All versions come with the wording “FIRE ALARM” display though other wording in other languages can be ordered as an accessory.

5000 series illuminated panels do not replace optical warning devices within fire detection units.

Order codes

Code	Nominal voltage	Nominal current	Lamp	Flash frequency	Package weight
O-5055-CSA	from 10.8 Vdc to 28 Vdc		High brightness LED	steady light or 60/min	0.70 Kg