

- Thermoplastic self-extinguishing frame
- Protection rating IP 65
- Power supply 12/24 Vdc
- Steady or flashing light
- High sound power buzzer
- LED backlighting

Series 5500

IP65 optical/acoustic panel

Optical/acoustic sign board for outdoor use available in various versions, suitable for all types of risk conditions such as fire, flooding, gas leaks, etc., whenever visual and acoustic information are needed.

The IP 65 Protection rating allows use in indoor and outdoor environments including damp, dusty settings.
5500 series alarm panels are available with a high visibility LED lighting system and high sound pressure buzzers.


All versions come with the wording "FIRE ALARM" display though other wording in other languages can be ordered as an accessory.

5500 series illuminated panels do not replace optical warning devices within fire detection units.

Series 5500

Housing material	Self-extinguishing white thermoplastic (hot wire 850°C)
Buzzer material	Self-extinguishing polycarbonate, transparent
Type of connection	Terminals
Operating temperature	-10°C to +50°C
Protection rating	IP65
Buzzer characteristics	

Dimensions

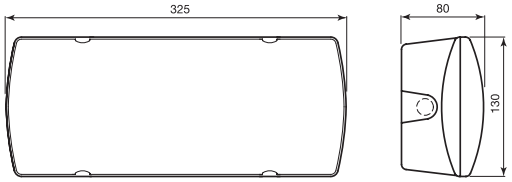

Order codes

Code	Nominal voltage	Nominal current	Lamp	Flashing frequency	Package weight
O-5555-CSA	From 10.8 Vdc to 28 Vdc		High brightness LED	steady light or 60/min	0.90 Kg