TVT

Secure The World With You

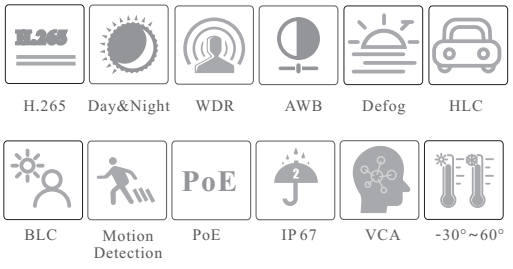
CAMERA

TD-9482S3B

8MP HD Bullet Network Camera



- H.265+/H.265/H.264+/H.264/MJPEG coding
- Max. resolution: 8MP (3840 × 2160)
- ICR auto switch, true day / night vision
- 3D DNR, true WDR, HLC, BLC, smart IR and ROI coding
- 30~50m IR night view distance
- 1CH audio input
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- Support three streams
- IP 67
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888 Fax: +86-755-33104777

TD-9482S3B

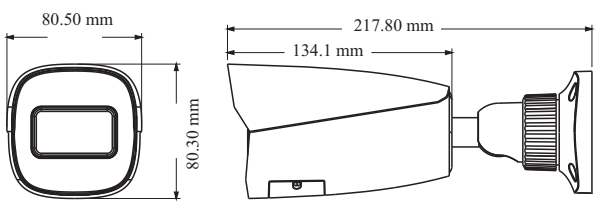
8MP Bullet Network Camera

SPECIFICATIONS

Model / Specifications	TD-9482S3B			
Camera				
Image Sensor	1 / 2.8" CMOS			
Image Size	3840×2160			
Electronic Shutter	1 s ~ 1 / 100000 s			
Iris Type	Fixed Iris	DC Iris		
Min. Illumination	0 lux with IR			
Lens	53°; D.FoV:120°	V.FoV:53°~18°; D.FoV:115°~36°		
Focus	Fixed	Motorized		
Lens Mount	M12	Φ14		
Day&Night	ICR			
Wide Dynamic Range	120dB			
BLC	Yes			
HLC	Yes			
Defog	Yes			
Digital NR	3D DNR			
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°			
DORI Distance				
Lens	Detect	Observe	Recognize	Identify
2.8mm	86.65m(284.28ft)	34.66m(113.71ft)	17.33m(56.85ft)	8.66m(28.41ft)
2.8~12mm(W)	85.71m(281.20ft)	34.28m(112.46ft)	17.14m(56.23ft)	8.57m(28.11ft)
2.8~12mm(T)	272.75m(894.84ft)	109.10m(357.93ft)	54.55m(178.96ft)	27.27m(89.46ft)
Image				
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG			
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile			
Resolution	8MP (3840 × 2160), 6MP(3072 × 2048),5MP(2592 × 1944), 4MP (2560 × 1520), 2K(2560 × 1440), 3MP(2304 × 1296), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240			
Main Stream	60Hz：8MP(1~20fps)/6MP/5MP/4MP/2K/3MP/1080P/720P(1~30fps) 50Hz：8MP(1~20fps)/6MP/5MP/4MP/2K/3MP/1080P/720P(1~25fps)			
Sub Stream	60Hz: 720P(1~12fps)/D1/480 × 240(1~30fps) 50Hz: 720P/D1/480 × 240(1~25fps)			
Third Stream	60Hz: D1/CIF/480 × 240 (1~30fps) 50Hz: D1/CIF/480 × 240 (1~25fps)			
Bit Rate	64 Kbps ~ 12 Mbps			
Bit Rate Type	VBR / CBR			
Audio Compression	G711A / U			
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, image mirror, image flip, Sharpness, NR, etc. adjustable through client software or web browser			
ROI	Each ROI to be configured separately			
Interfaces				
Network	RJ45			
Video Output	No			
Audio	1CH audio input			
Storage	Built-in micro SD card slot; up to 256GB			
Reset	Yes			
Functions				
Remote Monitoring	IE browser/ TVT NVR / NVMS / mobile APP			
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission			
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP,HTTP, 802.1x, UPnP, HTTPs, QoS			
Interface Protocol	ONVIF			
Storage	Network remote storage; micro SD card storage			
Smart Alarm	Motion detection; SD card error; SD card full			
Intelligent Analytics	Scene change, video blur detection, video color cast detection , line crossing detection, intrusion detection			
General function	Watermark, IP address filtering, video mask, heartbeat, password protection, corridor pattern, etc.			


IR Distance	30~50m
Protection Grade	IP 67
PoE	Yes (IEEE802.3af)
Others	
Power Supply	DC12V/PoE
Power Consumption	< 10W
Storage Conditions	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Operating Conditions	- 30 °C ~ 60 °C (-22°F~140°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	217.8 × 80.5 × 80.3
Weight (net)	Approx. 0.662KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)


DIMENSIONS




AVAILABLE ACCESSORIES


TD-YXH0301


TD-YXH0103


TD-YXH0104


TD-YXH0301+ TD-YZJ0501


TD-YXH0301+ TD-YZJ0601


TD-YXH0301+ TD-YZJ0810

AVAILABLE MODEL

Available Model	TD-9482S3B(D/PE/AR3)	Fixed lens
	TD-9482S3B(D/AZ/PE/AR3)	Motorized zoom lens

*All pictures and specifications are for reference only and are subject to change without prior notice.