
CE EN 54-24

PREVIDIA | ULTRA

WAC 165/6 PP1

6.5” 6W WALL-MOUNT LOUDSPEAKER

The distinguishing feature of the WAC 165/6 PP1 loudspeaker for voice evacuation systems is its elegant design (rectangular shape).
Wall mounting this device offers the possibility of positioning it both horizontally and vertically.
This 6W loudspeaker guarantees high quality reproduction of voice announcements and background music and is suitable for installation in places such as conference rooms, shops, hotels, offices, as well as museums and restaurants.
EN54-24 certified.

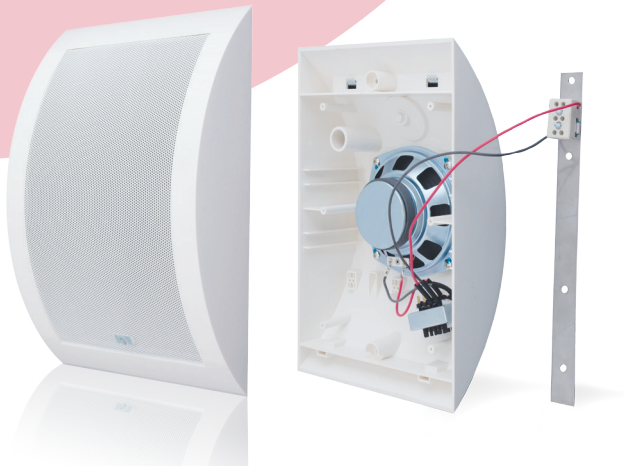

TECHNICAL SPECIFICATIONS

Main features

- 6.5” speaker
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall mounting
- Internal selector to adjust the output power to 6 / 3 / 1.5 / 0.75 W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified


Electrical specifications

Power (PHC)	6 / 3 / 1.5 / 0.75 W (internal selector)
SPL (Sound Pressure Level)	
Frequency response	145 Hz – 19.000 KHz (-10 dB)
Operating voltage	70 – 100 Vrms

Mechanical specifications

IP protection grade (according to EN54-24 / IP Rating)	21C/32
Enclosure material	ABS
Dimensions	330 x 209 x 84 mm
Weight	1.2 Kg
Colour	White RAL 9010
Mounting type	Wall mount

Dimensions

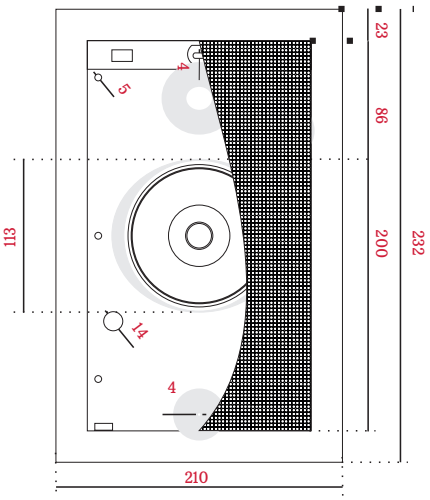

ORDER CODE

WAC 165/6 PP1 6.5” 6W wall mount loudspeaker

Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

Inim distributor’s stamp
and signature