

W430

Boasting a remarkable 4K 8MP resolution, W430 delivers 4 times the clarity of standard 1080p cameras. Whether you're viewing in real time or playing back recorded footage, W430 ensures that previously elusive details are now effortlessly discernible. The optimized motorized zoom lens offers a wider field of view and faster focusing speed, ensuring that you never miss a critical moment. With 5X optical zoom, you can effortlessly switch between capturing clear details in the distance and maximizing your coverage area.

1. Specs



1	Antenna
2	Mount
3	Metal Aluminum Case
4	4 IR LEDs
5	High Definition Lens
6	5 Spotlights



1	microSD Card Slot
---	-------------------



1	Power
2	Reset Button
3	Network
4	Waterproof Lid

2. Setup and Install

Set up the Camera

What's in the Box

Note: The package content may vary and update with different version and platforms, please take the below information only for a reference. And the actual package content are subject to the latest information on the product selling page.
W430



W430*1



1m Network Cable*1




Quick Start Guide*1



Surveillance Sticker*1



Pack of Screws*1



Mounting Template *1



Wrench*1



4.5m Power Extension Cable *1




Power Adapter *1

Set up the Camera on the App


Before initial setup, follow the steps below to connect your camera:

1. Connect the camera to a LAN port on your router with an Ethernet cable.
2. Power on the camera with a power adapter.

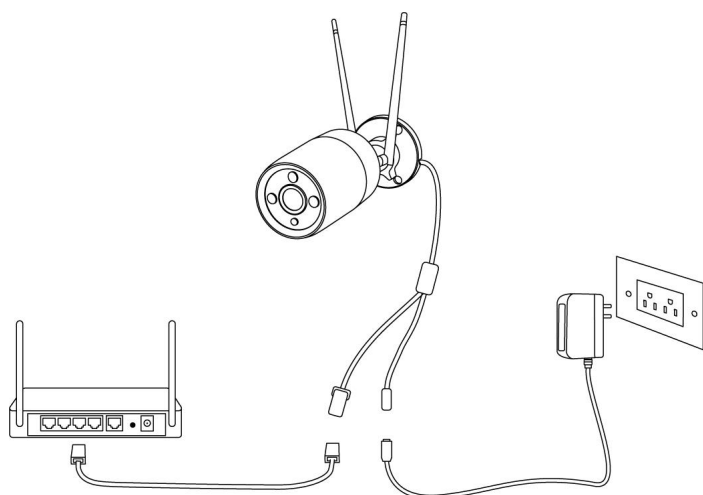

For Reolink WiFi cameras with LAN ports but without voice prompt, here is a simple guide for you to get the initial setup done.


Step 1. Tap the icon  on the top right corner.

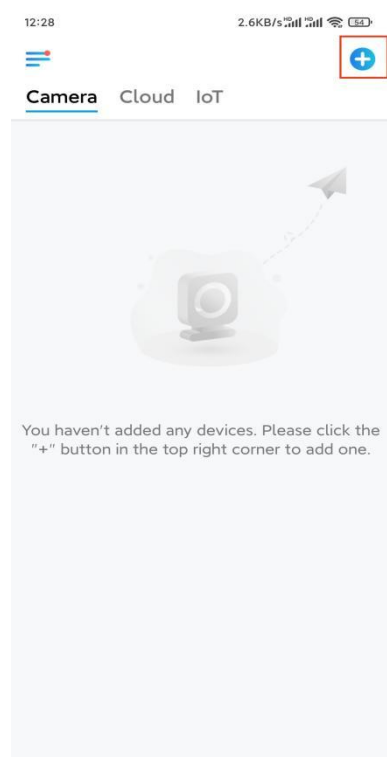


Note: If you've enabled the **Add Device Automatically** option on the App's Settings page, you can tap this device on the **Devices** page and turn to **Step 3** directly.

Step 2. Scan the QR code on the back of the camera. You may tap **Light** to enable a flashlight when setting up the camera in a dark environment.


If the phone doesn't respond, please tap **Input UID/IP** and then manually type in the UID (16-digit characters under the QR code of the camera). Then tap **Next**.

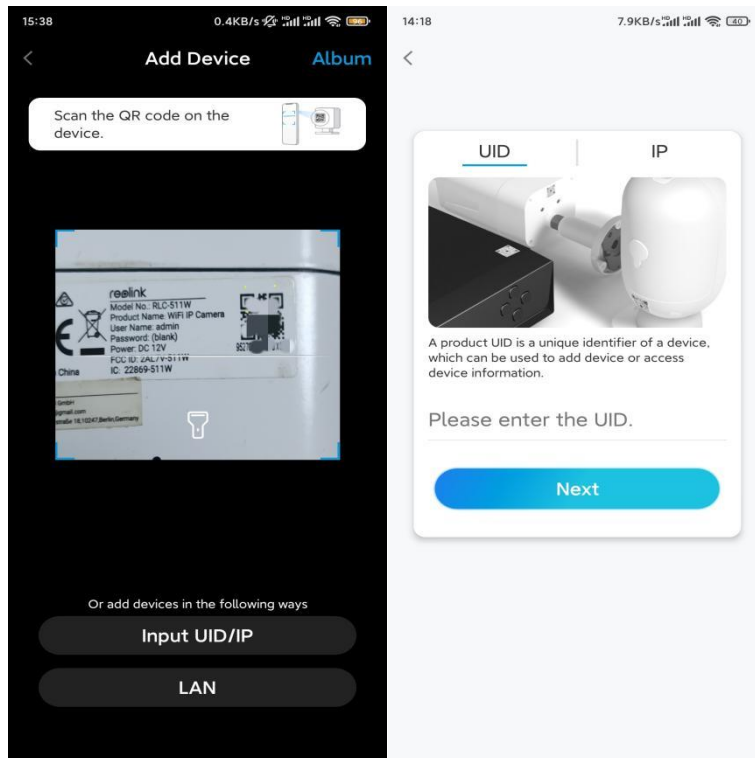


Step 3. Create the password for your camera. Then tap **Next**.

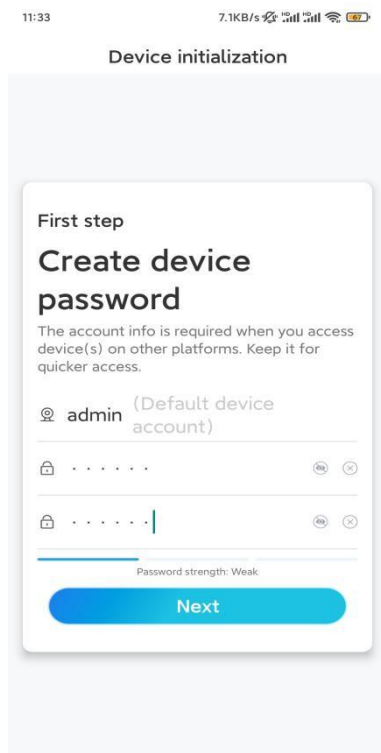


Step 4. Name your camera. Then tap **Next**.

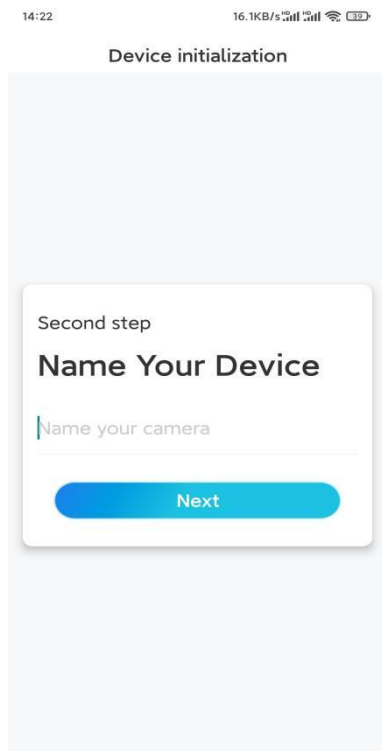

Step 5. Tap the WiFi network you want to join, and enter the password of the WiFi network.
Then tap **Save** to save the network configuration.

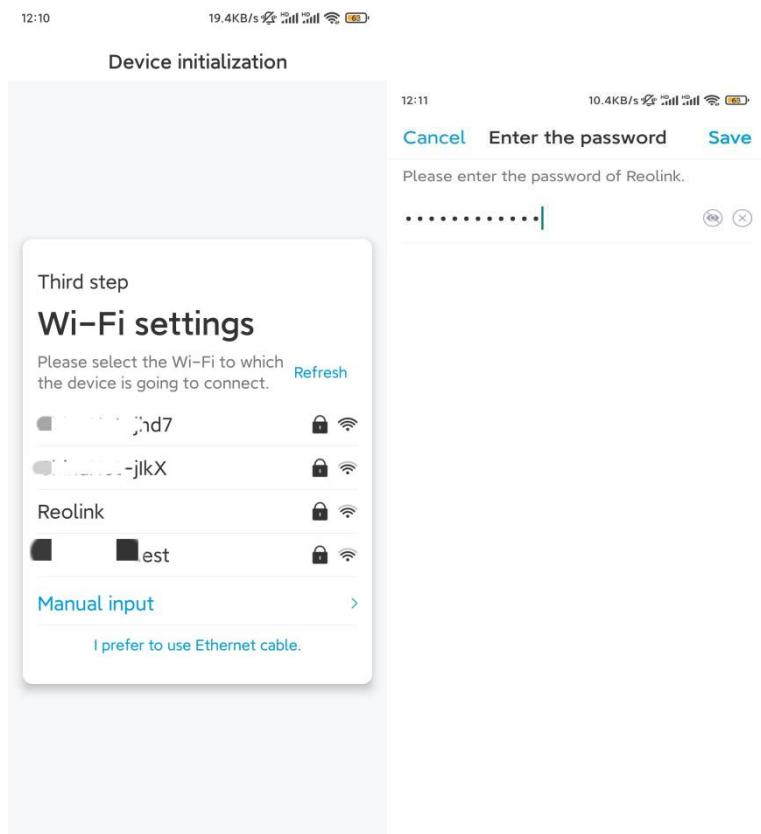

Step 6. Done! The initialization of your camera is finished.

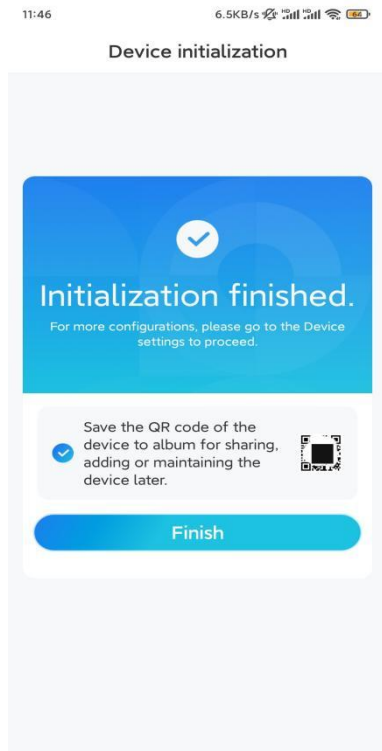


Note: If this device can't connect to the WiFi after you remove the Ethernet cable, you can connect it to the router again and see if it can pass the WiFi test.

Install the Camera


Please follow the steps below to install the camera.

Step 1. Drill holes in accordance with the mounting hole template.

Note: Use the drywall anchors included in the package if needed.



Step 2. Install the mount base with the mounting screws included in the package.




Notes:

Run the cable through the cable notch on the mount base.

As for the WiFi camera, it is recommended that the antennas be installed upward

or horizontally for better WiFi connection.

Step 3. To get the best field of view, loosen the adjustment knob on security mount and turn the camera.



Step 4. Stiffen the adjustment knob to lock the camera.

