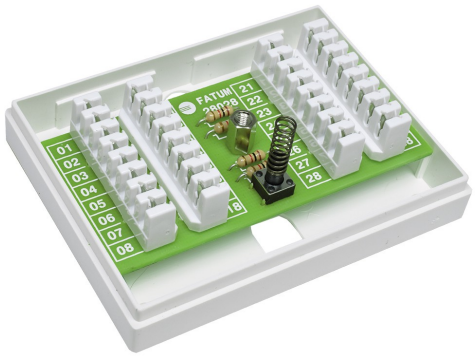


28028

E-NR: 5015201

ALARM BOX “MINI” 20 POLES

Complete junction box for installation of alarm and access systems.
Anti-tampering protected 16 pairs junction box.
4 pcs 1 Kohm termination resistors is mounted on the terminal block.
The terminal block has 16 parallel connected terminals, of which 1 pair is intended for anti-tamper switch connection. The box is flame-retardant according to UL 94 V-0.
Available in different options, slot (LSA) or screw connection with lift function.

TECHNICAL DETAILS

Terminal type	LSA/LSA, Screw/screw
Dimensions (L x W x H) mm	58 x 76 x 27
Cable dimension - LSA slots (mm)	Ø 0,4 – 0,7
Cable dimension - screw terminals	0,14 – 1 mm2
Input max. load	60 V / 2 A
Tamper switch max. load	50 mA
Product type	Connection accessories
Environment	Indoor
Connection terminal	Contact configuration, Pairing
Series	Mini series
Enclosure	Plastic
Enclosure size	Mini
Product line	Fatum
Product feature	Surface-mounted

ORDER INFORMATION

Model	E-NR	Description
28028.01	5015201	Alarm Box Mini; 16 pairs; 1Kohm; Tamper Protected; LSA / LSA
28028.03	5010309	Alarm Box Mini; 16 pairs; 1 Kohm; Tamper Protected; Screw / Screw

SCHEMATICS

