CE EN 54-24

PREVIDIA | ULTRA

WAQ 130/6 PP

5” 6W WALL-MOUNT LOUDSPEAKER

The WAQ 130/6 PP loudspeaker for voice evacuation systems is a 6W loudspeaker suitable for a wide variety of applications due its square-shape design and high acoustic capacity.
This device has a metal enclosure and is the ideal choice for the reproduction of voice announcements and background music in all types of environments.
EN54-24 certified.



TECHNICAL SPECIFICATIONS

Main features

- 5” speaker
- Suitable for 70V or 100V lines
- Equipped with internal transformer for adapting the power parameters
- Wall mounting
- Internal selector to adjust the output power to 0.75 / 1.5 / 3 / 6 W
- White colour
- Ceramic connection terminal
- Thermal protection fuse included
- EN54-24 certified


Electrical specifications

Power (PHC)	0.75 / 1.5 / 3 / 6 W (internal selector)
SPL (Sound Pressure Level)	
Frequency response	150 Hz – 8.2 KHz (-10 dB)
Operating voltage	70 – 100 Vrms

Mechanical specifications

IP protection grade	54
Enclosure material	Metal
Dimensions	164 x 164 x 66 mm
Weight	1.6 Kg
Colour	White RAL 9010
Mounting type	Wall mount

Dimensions

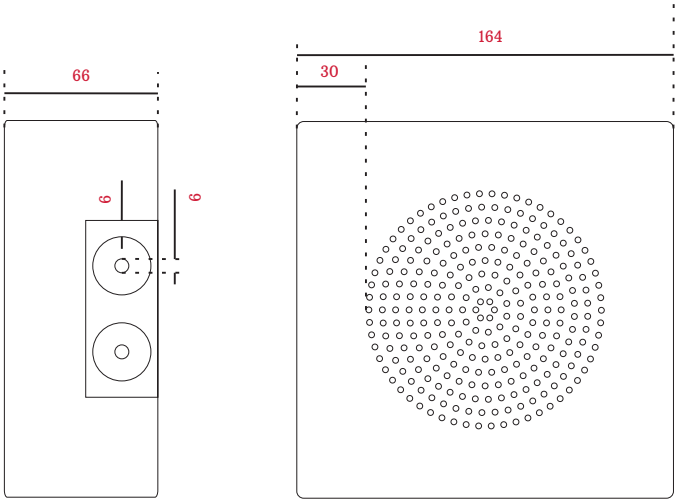

ORDER CODE

WAQ 130/6 PP 5” 6W wall-mount loudspeaker

Centobuchi, via Dei Lavoratori 10
63076, Monteprandone (AP), ITALY
Tel. +39 0735 705007 _ Fax +39 0735 704912

Inim distributor’s stamp
and signature